



NWCG Standards for Wildland Fire Chainsaw Operations

PMS 212

JANUARY 2026



NWCG Standards for Wildland Fire Chainsaw Operations

January 2026
PMS 212

The *NWCG Standards for Wildland Fire Chainsaw Operations* establishes national interagency standards for chainsaw operations on wildland fires and the incident positions of Basic Faller (FAL3), Intermediate Faller (FAL2), and Advanced Faller (FAL1) on wildland fires. Member agencies have agreed to meet or exceed the standards set forth in this document for sawyer certification.

The following standards are meant to ensure safe, efficient, and effective operations in support of interagency goals and objectives and should serve as a guide to promote effective and consistent on-incident training:

- Meet or exceed all Occupational Safety and Health Administration (OSHA) 1910.266 Logging Standards.
- Ensure that risk management is incorporated into all aspects with an emphasis on open communications.
- Promote safe and standardized chainsaw methods, techniques, and procedures for chainsaw operators from participating agencies.
- Provide consistent interagency guidance, common terms, definitions, and standardized procedures for wildland firefighting chainsaw use.
- Provide a standardized framework for current and future chainsaw training curricula.
- Include optional crosscut saws in Appendix C.

By definition, NWCG standards encompass guidelines, procedures, processes, best practices, specifications, techniques, and methods.

The [Basic Faller \(FAL3\)](#), [Intermediate Faller \(FAL2\)](#), and [Advanced Faller \(FAL1\)](#) position pages in the NWCG position catalog, as well as Appendices A and B of this document, include links to standards and references needed to perform the duties of these positions.

The National Wildfire Coordinating Group (NWCG) provides national leadership to enable interoperable wildland fire operations among federal, state, Tribal, territorial, and local partners. NWCG operations standards are interagency by design; they are developed with the intent of universal adoption by the member agencies. However, the decision to adopt and utilize them is made independently by the individual member agencies and communicated through their respective directives systems.

Table of Contents

Chapter 1 — Well-Being and Human Factors	1
Physical Well-Being.....	1
Mental Well-Being.....	1
Human Factors	2
Chapter 2 — Safety, First Aid, and Personal Protective Equipment	4
Occupational Safety and Health Administration (OSHA).....	4
First Aid Policy and Training Requirements	4
First Aid Equipment.....	4
Personal Protective Equipment (PPE).....	5
Work Area Control.....	6
Emergency Evacuation Plan	7
Lessons Learned and the Importance of Close Calls	7
Fuel Geyser Mitigation	8
Chapter 3 — Chainsaw Components, Maintenance, and Repairs.....	9
Equipment	9
Safety Check	14
Maintenance	15
Chainsaw Repairs.....	20
Chapter 4 — Risk Management, Sizeup, and Complexity.....	23
Risk Management.....	23
Step 1. Identify Hazards — Outside-In, Top-Down Approach	23
Step 2. Assess Hazards — Procedural Sizeup	24
Step 3. Develop Controls and Make Risk Decisions — Complexity Analysis, Validate Objective ...	26
Step 4. Implement Controls — Mitigation Measures, Go/No-Go Decision.....	27
Step 5. Supervise and Evaluate — Stump and Objective Analysis	27
Chapter 5 — Basic Saw Operations and Handling	28
Starting a Chainsaw.....	28
Transporting a Chainsaw.....	29
Safe Handling.....	30
Sawyer/Swamper Teams.....	33
Chapter 6 — Brushing, Limbing, and Bucking	34
Cutting Area Safety.....	34
Brushing	35
Limbing.....	36
Bucking	36
Chapter 7 — Directional Felling	42
Directional Felling	42
Develop a Felling Plan	43
General Felling Operations	46
Types of Undercuts	46
Felling Away from the Natural Lean	53

Chapter 8 — Tree Anatomy and Defects Contributing to Failure	58
Tree Anatomy.....	58
Decay Types.....	60
Root Damage.....	60
Tree Damage Identifiers.....	61
Chapter 9 — Advanced Felling	70
Advanced Felling	70
Large Diameter Tree Felling.....	70
Leaner Trees.....	76
Hang-up Trees.....	78
Limb-Tied Trees.....	83
Steep Slopes	84
Fire-Damaged Trees.....	84
Appendix A: Common Sawyer-Specific Duties.....	87
Prepare.....	87
Mobilize	88
Build the Team.....	89
Communicate and Coordinate.....	90
Manage Risk	91
Demobilize	93
Common Sawyer Resources:	95
Appendix B: Advanced, Intermediate, and Basic Faller (FAL1, FAL2, and FAL3) Position Standards	97
Advanced Faller (FAL1).....	97
Intermediate Faller (FAL2).....	102
Basic Faller (FAL3)	106
Appendix C: Crosscut Saws.....	110
Saws	110
How a Saw Cuts.....	112
Maintenance	113
Troubleshooting	114
Brief Overview of Saw Filing Procedures	115
Crosscut Bucking.....	116
Single or One-Person Bucking Advantages.....	117
Two-Person Cutting	118
Crosscut Felling	119

Chapter 1 — Well-Being and Human Factors

A high percentage of occupational accidents can be attributed to human factors. Accidents that occur in the workplace are caused by both unsafe acts and unsafe conditions. The physical and mental condition of employees is just as important as the protective clothing they wear or the ergonomics of their saw operations. A successful wellness program encourages individuals to change unhealthy habits and improve both physical and mental health, which can reduce injuries and lower workers' compensation costs.

Physical Well-Being

Standards

- Sawyers must be physically fit and successfully pass the wildland fire work capacity test as defined in the *NWCG Standards for Wildland Fire Position Qualifications*, PMS 310-1, <https://www.nwcg.gov/publications/pms310-1>.
- Sawyers understand how physical well-being impacts their safety and performance on the fireline.

Narrative

Over a short period of time, operating a 12 to 23-pound chainsaw can become physically challenging. As fatigue sets in, the risk of injury greatly increases. Personal fitness and strength directly affect the sawyer's ability to grasp, balance, and control the chainsaw. With experience, the chainsaw becomes an extension of the body, and sawyers must have enough fitness to control it safely and effectively.

- Operating a chainsaw requires balance of proper technique and muscular fitness to accomplish cutting objectives.
- Proper posture and muscular strength in the lower body, torso, and shoulders provide a stable foundation for manipulating the chainsaw.
- Necessary muscular endurance and proper chainsaw handling should be emphasized to prevent a lapse in control of the chainsaw.

Mental Well-Being

Standards

- Sawyers recognize the impacts of mental health on job performance and safety.
- Sawyers must understand how mental well-being impacts their safety and performance on the fireline.

Narrative

“When you have your saw in hand, your full attention must be on the task at hand!” — Randy Anderson.

Sound mental health affects our ability to stay focused and maintain mental engagement throughout an operation. Mental health includes life satisfaction, self-acceptance, a sense of purpose, a positive identity, feeling connections to surroundings, and resiliency.

Before picking up a saw, a sawyer should consider their current state of mind. Even when intentions are to focus on a work assignment, mental factors can intervene.

It just takes one moment of distraction for a negative outcome to occur. If a sawyer is feeling distracted, they should use the opportunity to pass off the chainsaw.

See yourself as stronger for acknowledging that it is ok to not be ok.

Human Factors

Standards

- Sawyers recognize the impacts of human factors and crew dynamics on job performance and safety.
- Sawyers understand they are empowered to turn down saw assignments based on their comfort level, knowledge, skills, and abilities.
- Sawyers will determine whether the tree needs to be felled, limbed, or bucked. Determine if they have the equipment, experience, and ability to safely meet fireline objectives. Decide if there are other options, such as moving the fireline, using equipment, or creating no-work zones.

Narrative

“Have we created a climate that prompts them to finish the cut based on their sense that they now own the tree?” — Strawberry Action Plan

Human factors are the combined effects of personal thoughts, beliefs, behaviors, abilities, strengths, and limitations on how an individual performs a task. Many chainsaw accidents have been influenced by the effects of human factors on decision making.

Every sawyer has the right to turn down an assignment. The sawyer’s supervisor needs to support the sawyer when they decline an assignment due to risk. For more information, refer to the How to Properly Refuse Risk section of the *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, <https://www.nwcg.gov/publications/pms461>.

There is often a perception that a sawyer is responsible for completing a saw operation once it has begun. This viewpoint can influence a sawyer to continue an ineffective saw operation without acknowledging that their level of risk has increased. Every sawyer should understand that it is acceptable to walk away from the saw operation at any point, whether during the procedural sizeup, unforeseen hang-ups, or dangerous circumstances.

Both the military and the wildland fire community promote tactical pauses. This is the practice of pausing at critical points of an operation to reevaluate the situation and identify any associated risks that may have evolved but have gone unnoticed. Due to the inherent high tempo culture of wildland firefighting, personnel often focus on completing a task or mission. Firefighters are good at identifying and mitigating hazards prior to an operation, but may fail to acknowledge the increased level of risk that evolves during the operation.

Some examples of processes for reevaluating throughout an operation:

- Stop, Look, Listen, Think — United States Military
- Life First — Stop, Think, Talk, Act — United States Forest Service (USFS)
- Switchback — Stop, Breathe, Re-Think, Re-Plan — USFS
- Developing Thinking Sawyers
- OODA loop — Observe, Orient, Decide, Act — United States Air Force (Col. John Boyd)

OODA Loop.



Chapter 2 — Safety, First Aid, and Personal Protective Equipment

Occupational Safety and Health Administration (OSHA)

Standards

- Sawyers understand how OSHA standards influence saw operations and agency policy.
- Sawyers cut within their qualification level unless under the direction of a higher-qualified sawyer.

Narrative

OSHA's mission was directed by the Occupational Safety and Health Act of 1970. Congress created OSHA to ensure safe and healthful working conditions for working people by setting and enforcing standards through training, outreach, education, and assistance.

All content within the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, meets or exceeds all OSHA 1910.266 Logging Standards: <https://www.osha.gov/laws-regs/regulations/standardnumber/1910/1910TableofContents>.

For further information on 1910.266: <https://www.osha.gov/enforcement/directives/cpl-02-01-019>.

First Aid Policy and Training Requirements

Standards

- Each sawyer must have received training and hold current certification in First Aid and cardiopulmonary resuscitation (CPR).
- In addition to the First Aid requirements, sawyers must be made aware of the potential complications of and first aid for insect bites, stings, and insect and tick-borne diseases [29 CFR 1910.266(I)(3)(iv)].

First Aid Equipment

Standards

- All work sites will have a first aid kit on site containing the items listed below. The number of first aid kits must be commensurate with the number of employees engaged at the work site.

Narrative

Federal first aid equipment requirements for chainsaw operations:

OSHA Standard 1910.266 Appendix C: <https://www.osha.gov/laws-regs/regulations/standardnumber/1910/1910.266AppA>.

The contents of the first aid kit listed below should be adequate for small work sites consisting of two to three employees. For larger operations, or when multiple operations are being conducted at the same location, additional first aid kits should be provided at the work site, or additional quantities of supplies should be included in the first aid kits.

- Gauze pads (at least 4 x 4 inches)
- Two large gauze pads (at least 8 x 10 inches)

- Box adhesive bandages (band-aids) *
- One package of gauze roller bandage (at least two inches wide)
- Two triangular bandages *
- Wound cleaning agents such as sealed moistened towelettes *
- Scissors *
- At least one blanket *
- Tweezers
- Adhesive tape *
- Latex gloves *
- Resuscitation equipment such as resuscitation bag, airway, or pocket mask *
- Two elastic wraps *
- Splint *
- Directions for requesting emergency assistance

**Included in NFES 20 – 25-person First Aid Kit*

Additional Recommendations

- Tourniquet/emergency bandages (Israeli)
- Backboard/spine mobilization transport
- Basic life support trauma gear – based on Emergency Medical Services (EMS) qualifications
- Automated external defibrillator (AED)

Personal Protective Equipment (PPE)

The chainsaw PPE requirements from the Standards for Interagency Standards for Fire and Aviation Operations, Chapter 7, <https://www.nifc.gov/standards/guides/red-book>, are based in compliance with the OSHA Logging Standard 1910, [https://www.osha.gov/laws-regs/regulations/standardnumber/1910/1910.266#1910.266\(d\)\(1\)\(vi\)](https://www.osha.gov/laws-regs/regulations/standardnumber/1910/1910.266#1910.266(d)(1)(vi)).

Standards

- Chaps (leg protection) — All chainsaw operators will wear chainsaw chaps meeting the USFS Specification 6170-4F or 4G. Chaps must overlap boots by a minimum of two inches yet not be so long as to create a tripping hazard. Leg straps will be tightened to achieve leg protection.
- Gloves — All sawyers will wear leather/flame-resistant hand protection, which provides adequate protection from puncture wounds, cuts, and lacerations.
- Helmet — All sawyers will wear a helmet meeting the current (NFPA) 1977 Standard on Protective Clothing and Equipment for Wildland Fire Fighting, or equivalent helmet meeting the current ANSI Z89.1 Type 1, Class G.
- Eye and Face Protection — Eye protection will be worn during all chainsaw operations, including cleaning and fueling (meeting ANSI Z87.1). Steel mesh safety goggles are allowed during felling, bucking, and brushing operations. Face shields are only required where face protection has been identified in a Job Hazard Analysis/Risk Assessment (JHA/RA). Face shields must meet ANSI Z87.1.

- Boots — Sawyers are required to wear approved wildland fire boots.
- Hearing Protection — Sawyers and swampers must be provided with and wear hearing protection.
- Clothing — Sawyers must wear wildland fire-approved long-sleeve flame-resistant shirts and pants.

Narrative

All sawyers should establish regular PPE inspection protocols. PPE functions best when it is clean. Follow the manufacturer's recommendations for inspection, cleaning, and service life.

Work Area Control

Standards

- Sawyers understand how to establish and maintain work area control.

Narrative

"Forty-two percent of the time, the person struck was not cutting — including in 5 of the 8 fatalities." 2014-2019 Tree Felling Accident Analysis, https://lessonslearned-prod-media-bucket.s3.us-gov-west-1.amazonaws.com/s3fs-public/irdoc/Tree_Felling_Accident_Analysis_2004_2019_508_FINAL.pdf.

- The chainsaw operator is ultimately responsible for controlling the work area. No one shall be permitted in the secured felling area without the faller's authorization. Supervisors must support sawyers in enforcing work area control measures.
- The faller must establish a safe area outside the secured area and direct EVERYONE to remain there until all felling procedures are completed and a verbal confirmation, such as an "all clear," has been communicated.
- Employees shall be spaced, and the duties of each employee shall be organized so that the actions of one employee will not create a hazard for any other employee [1910.266(d)(6)(I)].
- Where practical, a work area perimeter should be established — equivalent of two tree lengths of the material being felled in all relevant directions. The faller must maintain this perimeter during all tree felling operations.
- The faller shall consider environmental factors, such as weather, topography, and infrastructure, in their work area control.
- No one shall work directly below felling or bucking operations.
- Competent lookouts must be established and maintained by the faller at all major access points, including roads and trails that provide access to the secured work area.
- Before allowing access to the work area, the faller must identify and communicate all known remaining hazards at the hazard tree that could not be mitigated, such as hang-ups, unstable logs, or other dangers.

Emergency Evacuation Plan

Standards

- Sawyers understand the importance of a communication and emergency evacuation plan for each work site.

Narrative

An emergency evacuation plan that includes the following components should be in place during all chainsaw operations:

- Site location
- Communication methods and plans
- Primary and secondary extraction methods (air or ground)
- Transportation routes to the nearest ambulance services or hospitals

The following forms and publications can assist in the development of an emergency evacuation plan:

- Medical Plan (ICS 206 WF), <https://www.nwcg.gov/publications/ics-forms>.
- Planning for Medical Emergencies, *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, <https://www.nwcg.gov/publications/pms461>.
- *Interagency Standards for Fire and Fire Aviation Operations* (Red Book), https://www.nifc.gov/policies/pol_ref_redbook.html.

Lessons Learned and the Importance of Close Calls

“Highly Reliable Organizations (HROs) are unique because they self-organize to encourage and reward the self-reporting of errors...on the explicit recognition that the value to the organization of remaining fully informed and aware of the potentiality for the modality of error. HROs become central locations for organizational learning.” — Karl Weick.

Standards

- Sawyers understand the importance of operating in a learning culture where accidents are reported and analyzed to develop lessons learned.
- Sawyers make predictions about the effects of each cut and regularly compare outcomes with predictions to improve prediction certainty.
- Sawyers utilize hung trees, missed lays, and stump analysis to improve their understanding and experience as fellers.
- Sawyers utilize near misses to increase awareness of contributing conditions of accident precursors.

A successful saw organization is one that shares its lessons learned. Make a career commitment to continually learn about chainsaw safety.

Narrative

The occurrence of cut chaps is a serious near miss. Supervisors and sawyers should agree that cut or nicked chaps require immediate feedback, as they signal poor saw control and could lead to significant bodily harm. Cut chaps also serve as a valuable lesson for others to learn from.

Sources of Lessons Learned

- Lessons Learned Center, <https://lessons.wildfire.gov>.
- 2004-2019 Tree Felling Accident Analysis, https://lessonslearned-prod-media-bucket.s3.us-gov-west-1.amazonaws.com/s3fs-public/irdoc/Tree_Felling_Accident_Analysis_2004_2019_508_FINAL.pdf.
- Six Minutes for Safety, <https://www.nwcg.gov/committee/6-minutes-for-safety>.

Fuel Geyser Mitigation

Standards

- Sawyers understand the causes of and mitigations for preventing fuel geysering events.
- Sawyers understand the OSHA (1910.266) requirements for refueling chainsaws.

Narrative

Over the past several years, sawyers have experienced pressurized chainsaw fuel tanks releasing or spraying fuel when the fuel cap is opened, potentially exposing the operator. Some instances have resulted in serious injuries and/or damage to the chainsaw. Although uncommon, investigations have revealed this occurs more frequently than reported. If geysering occurs, with or without injury, report the incident using the Fuel Geyser Incident Reporting Form: <https://www.nwcg.gov/form/fuel-geyser-incident-reporting-form>.

Fuel geysers can happen anytime there is fuel, heat, and pressure in small gasoline-powered engines, including chainsaws and fuel transport containers.

Geyser Mitigations

- Always assume fuel tanks and fuel containers are pressurized. Shut off the saw and allow it to cool. Restart the equipment when it is cool.
- Always check fuel levels before opening the fuel tank or filler cap. Tanks more than half full are more likely to geyser.
- Always move at least 20 feet from the fireline or any ignition source and at least 10 feet from the fueling area.
- Cover the fuel cap with a rag when opening to contain potential fuel geyser spray. While maintaining downward pressure on the cap, open it slightly to release excess pressure and listen for the sound of gas release. Once the pressure subsides, continue to fully open the cap.
- Be extra vigilant when equipment is not functioning properly and fuel levels are above half a tank. Bubbling in the tank can indicate the potential for future fuel geysering and vapor lock.
- Do not use fuel older than one month; winter fuel may contribute to fuel geysering incidents.

Chapter 3 — Chainsaw Components, Maintenance, and Repairs

Equipment


Standards

- Sawyers identify components of a chainsaw and their purpose as described in the owner's manual.
- Sawyers identify the different types of saw chains and the components of the saw chain and guide bar.
- Sawyers have proper wedge type and quantity as well as an axe or wedge-driving tool of sufficient size and weight available during chainsaw operations.
- Fuel and oil containers must comply with current Department of Transportation (DOT) and OSHA Standards.

Narrative

Parts of a Chainsaw

Chainsaw parts numbered.

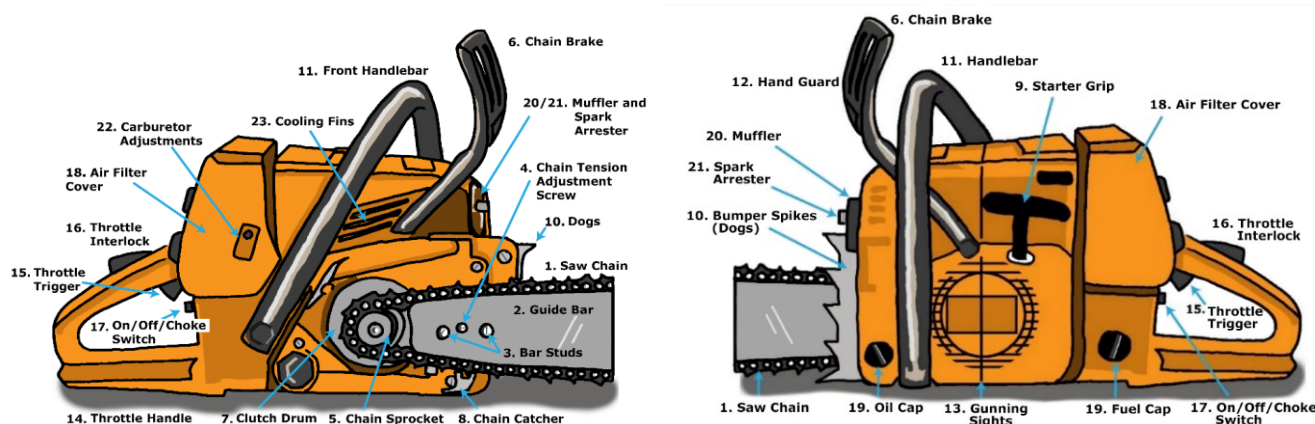

1. Saw chain — consists of several parts that work together to cut through wood.
2. Guide bar — guides the chain around the bar.
3. Bar studs with bar nuts — hold the bar and chain sprocket cover in place.
4. Front and side chain tensioner — move the guide bar to maintain proper chain tension.
5. Chain sprocket — a notched wheel that drives the saw chain around the bar.
6. Chain brake — stops the saw chain if it is activated by the sawyer's hand or by inertia during kickback.
7. Clutch — couples the engine to the chain sprocket when the engine is accelerated above idle speed.
8. Chain catcher — helps reduce the risk of the saw chain contacting the sawyer if the chain breaks or if the chain is thrown off the bar.
9. Starter grip — a rubber or plastic handle attached to the starter pull rope.

10. Bumper spikes (dogs) — holds the saw steady against the wood and provides a pivot point for leverage during cutting.
11. Handlebar — used to control the orientation of the chainsaw.
12. Hand guard — activates the chain brake and prevents the sawyer's hand from contacting the chain.
13. Gunning sights — used to aid in aiming the tree during felling.
14. Throttle handle — used to hold the rear of the saw.
15. Throttle trigger — controls the speed of the engine.
16. Throttle interlock — prevents the throttle from being activated unless it is depressed.
17. On/off/choke switch — turns the saw on and off.
18. Air filter cover — holds the air filter in place and covers the carburetor.
19. Oil and fuel caps — seals the bar oil and fuel tanks.
20. Muffler — reduces exhaust noise.
21. Spark arrester — prevents hot sparks from leaving the muffler.
22. Carburetor adjustments — used to adjust the fuel and air mixture at high and low chain speeds.
23. Cooling fins — disperse heat from the engine to keep the saw from overheating.

Additional Equipment

- Chain file with handle and guard, round files, file guide, and raker gauge.
- Felling axe — two-and-a-half to five-pound head in good condition is recommended.
- Wedges — single-taper for felling and double-taper for bucking.
- Sheath — ideally, covers the guide bar, chain, dogs, and muffler.
- Plumb bob — could be a bar nut or spark plug tied to a string.
- Spare parts — parts for the chain, bar, and miscellaneous equipment, including bar nuts, sprockets, e-clips, etc.
- Scrench — chainsaw bar wrench/spanner wrench.
- Filters — spare air and fuel filters.
- Fuel — must be in approved fuel containers that comply with *NWCG Standards for Transporting Fuel*, PMS 442, <https://www.nwcg.gov/publications/pms442>.

Recommended Equipment


- Full-wrap handlebar or $\frac{3}{4}$ wrap handlebar for felling operations.
- Whistle or air horn.
- Tuning screwdriver.
- Tachometer.

Chain Components

The saw chain is composed of several parts that work together and must be properly maintained for maximum performance and safety.

The cutter is the part of the saw chain that does the cutting. Saw chains have left- and right-hand cutters, allowing the chain to cut evenly through the wood. The depth gauge or raker determines the depth of the cut.


Cutter and depth gauge.

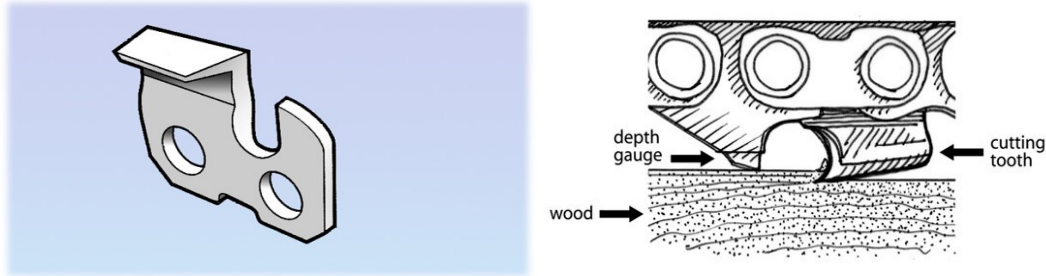

The cutters remove chips from the wood. During this process, the top plate cutting edge lifts the chip off the bottom of the cut while the side plate cutting edge separates the chip from the wall of the cut. The depth gauge setting determines the height at which the cutter enters the wood and thus the thickness of the removed chip. The depth gauge setting is the distance from the top of the depth gauge to the top plate.


Parts of the Chain

Chain parts numbered.

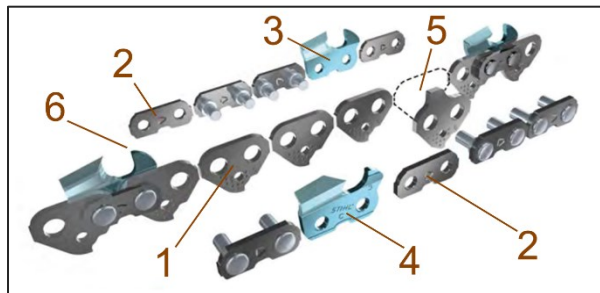


1. **Drive link** — fits in the bar groove so the bar can guide the chain around to the chain sprocket, enabling the power head to drive the chain.
2. **Tie strap** — holds the chain together.
3. **Left-hand cutter** — cuts the wood.
4. **Right-hand cutter** — cuts the wood.
5. **Humped drive link** — a low-kickback feature not found on all chains.
6. **Depth gauge (raker)** — determines the height at which the cutter enters the wood and thus the thickness of the removed chip. The depth gauge setting is the difference between the top of the depth gauge and the top plate.

Types of Chain

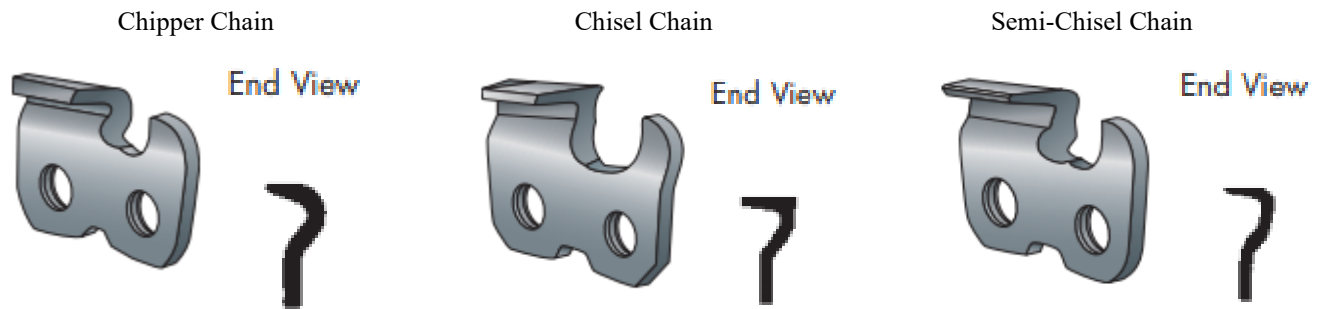

- The **chipper chain** is the most versatile cutter type and the easiest to file. It will tolerate dirt and dust better than chisel chains. The chipper chain is typically used for brushing, limbing, and felling trees of a smaller diameter.
- The **chisel chain** is the most aggressive cutter type. It is designed for production timber felling and should be used only by experienced sawyers. A square-ground chisel chain requires a file that fits the square shape of the cutting edge and is more difficult to file than other types of chain. The chisel chain dulls very quickly when exposed to dirt or dust. It is not recommended for brushing or limbing because of the potential for kickback.
- The **semi-chisel chain** is a less aggressive cutter type than the chisel chain, is more tolerant of dirt and dust, and stays sharp longer. The semi-chisel is good for wildland fire timber felling.

Cutter Sequences

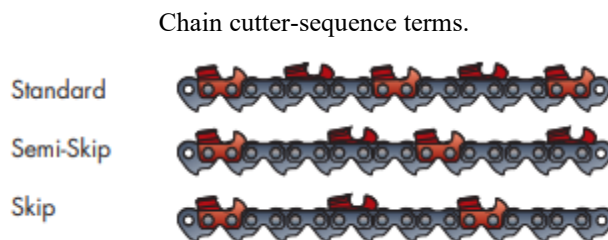

- **Standard** — is a sequence of left-hand cutter, tie strap, right-hand cutter, tie strap, left-hand cutter, tie strap, and right-hand cutter for the length of the chain. Standard sequence chains cut the fastest and the smoothest and are often used on shorter bar lengths of less than 24 inches for short cuts such as limbing and small-diameter tree felling.
- **Semi-skip** — is a sequence of left-hand cutter, two tie straps, right-hand cutter, one tie strap, left-hand cutter, two tie straps, right-hand cutter, one tie strap, and left-hand cutter for the length of the chain. Semi-skip chains are a compromise between standard and full-skip chains and work well for general use.
- **Skip or full-skip** — is a sequence of left-hand cutter, two tie straps, right-hand cutter, and two tie straps for the length of the chain. Full-skip chains work well on longer bars, greater than 34 inches, for large-diameter trees. The greater space between the cutters can transport more wood chips to be deposited outside of the kerf.


Chain Measurements

The pitch, gauge, and number of drive links must all be compatible between the bar and chain. Chainsaw bars typically have each required measurement stamped on them.

- **Pitch** — is the measurement between any three consecutive drive rivets divided by two ($3/8"$ is often referred to as $0.375"$ and $1/4"$ as $0.250"$). Pitch is also considered the size of the chain. The larger the pitch, the bigger the chain.
- **Gauge** — is the measured thickness of the drive links.
- **Drive lengths** — are the number of drive links, not cutters or tie straps.

Required chain measurements are stamped on the powerhead end of each bar.

Bar markings.

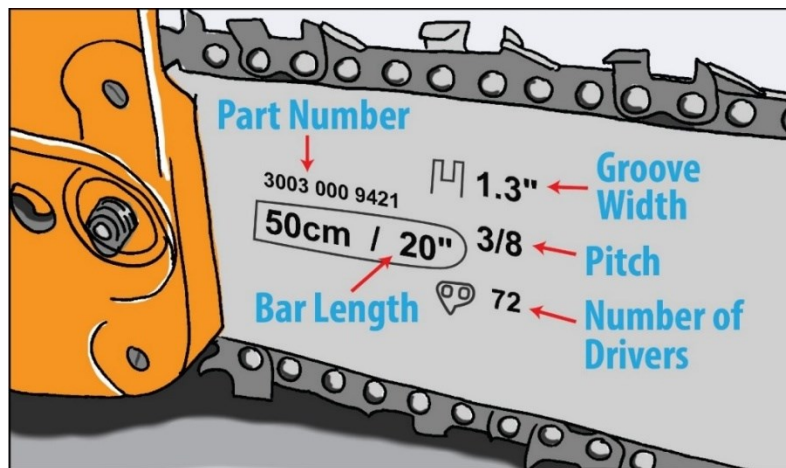

Chain Tension

A properly tensioned chain fits snugly against the underside of the bar. With the chain brake disengaged, it must still be possible to pull the chain along the bar by hand. Tension that is set too tightly can damage both the bar and chain. Incorrect chain tension is the single largest contributor to bar and chain problems.

To adjust chain tension:

1. Ensure the saw is off and gloves are being worn.
2. Loosen the bar nuts.
3. Pull the tip of the bar up and adjust the tension screw until the tie straps and cutters just touch the bottom of the bar.
4. While still holding the tip up, tighten the rear bar nut, then the front bar nut. The chain should feel snug but pull freely.

Axes and Pounding Tools

Axes and pounding tools are used to remove bark from trees and to drive wedges during felling and bucking operations. Although their weight varies, three to five pounds is average. The handle should be smooth and free of cracks, and the head should be securely attached. A Pulaski should never be used to drive wedges or used in place of a wedge.

Wedges

When properly placed, wedges help prevent the tree from pinching the chainsaw bar and guide the tree to fall in the intended direction. Wedging also increases directional felling options against a tree's primary lean.

The two basic types of wedges used in sawing are single- and double-taper. Sizes typically range from 5.5 to 12 inches.

- **Single-taper** wedges are simple, inclined planes designed to provide lift during tree felling. As the wedge is driven into the backcut, the tree hinges on the hinge wood, redistributing the tree's weight.
- **Double-taper** wedges are designed to reduce bind. They taper equally on both sides from the centerline, forcing the wood to move equally in both directions. They perform best when used in bucking to prevent the kerf from closing, which would cause the guide bar to bind.

Single-taper wedges.




Double-taper wedges.



Safety Check

Conducting a chainsaw safety check before starting operations is essential. Check for the following:

Parts of a chainsaw.

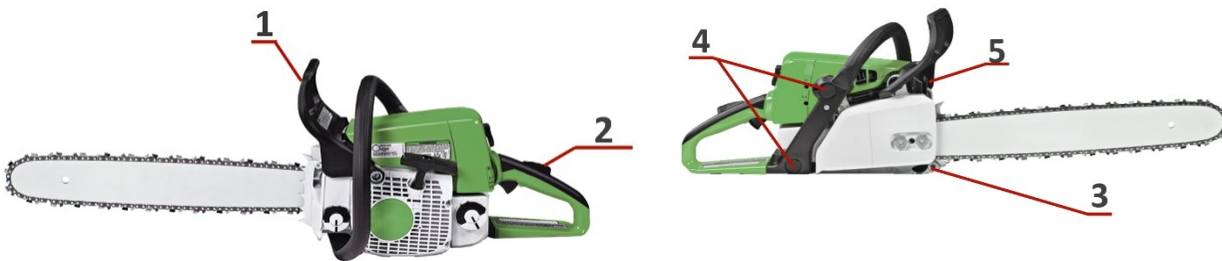

1. **Chain brake:** Ensure the chain brake locks and unlocks properly.
2. **Throttle trigger and interlock:** Ensure the throttle trigger cannot be squeezed without first depressing the throttle interlock on the top of the handle. This prevents the throttle from being activated by sticks or branches when the rear handle is not being held.
3. **Chain catch:** Confirm the chain catcher is present.
4. **Anti-vibration system:** Check that the anti-vibration system and fasteners are tight by turning the chainsaw upside down and confirming nothing is loose.
5. **Spark arrester screen:** Check that the spark arrester screen is present.

Maintenance

Standards

- Sawyers will understand how to properly sharpen and maintain the saw chain and guide bar in the field.

Sawyers understand the importance of routine maintenance and how often it needs to be completed as described in the manufacturer's recommendations and owner's manual.

Narrative

Chain Filing

A dull chain forces the sawyer to work harder, contributing to fatigue and an increased risk of kickback, accident, and injury.

Four Methods to Sharpen the Chain:

- File with a jig — the preferred method for beginner sawyers to help maintain correct angles.
- Depth gauge guide — maintain the correct depth gauge height by keeping the filing angle parallel with the chain.
- File only — after learning the correct way to sharpen with jigs, sharpening freehand in the field offers the most convenience.
- Grinder — an electric grinder can quickly sharpen chains to the most precise specifications and easily repair the profile of the cutter tooth, especially when damaged by rocks, debris, or incorrect filing. Use caution when operating a grinder to avoid overheating the metal on the cutting teeth.


Be sure to select a file that is the proper diameter for the chain.

Code digit on depth gauge	Alternative marking on depth gauge	Chain pitch	Round file diameter
1	1/4	1/4"	4.0 mm
2	325	0.325"	4.8 mm
3	3/8	3/8"	5.2 mm
4	404	0.404"	5.5 mm

Basic Steps When Filing


- Ensure the chain is tensioned properly.
- Assuming that all chain teeth are relatively close in length, begin with the cutter that is the most damaged or the most worn and count the number of strokes it takes to file out all irregularities. Then, sharpen all other cutters with the same number of file strokes. Hold the file handle firmly with one hand and guide the file with the other hand across the cutter on the forward stroke from the guide bar outward.

Cutter orientation and filing angles required for proper chain sharpening.

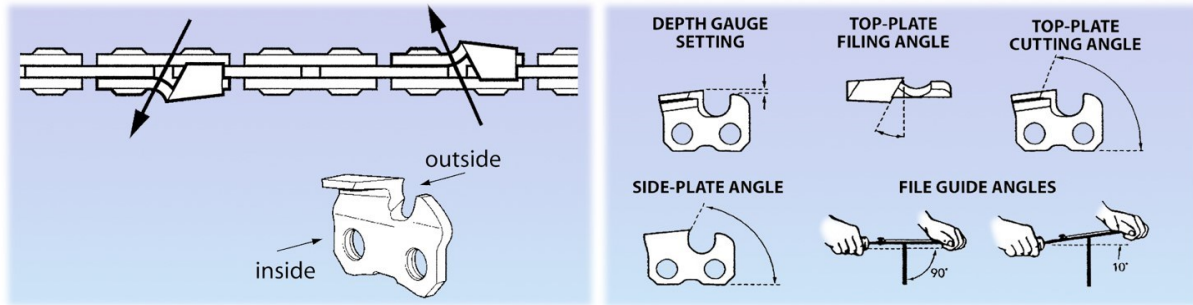

- Be sure that one-quarter of the file is above the top plate to ensure the gullet is properly filed.

Chain and file direction.

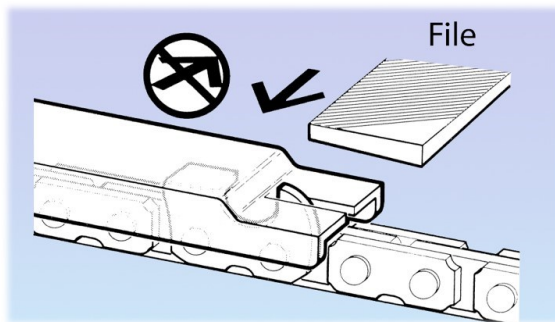

- Set depth gauges by using a depth gauge tool with the correct built-in setting for the chain. Place the tool on top of the chain so one depth gauge protrudes through the slot in the tool. If the depth gauge extends above the slot, use a flat file to file the depth gauge level with the top of the tool. Never file a depth gauge lower than the top of the tool.

Crooked saw cuts are typically due to improper filing. Many sawyers will favor one side, resulting in different angles on the right and left cutters.


A clean bar in good condition guides the chain through a straight and true cut. Because the bar is a softer metal, it wears more than the chain. Generally, one rail will wear more than the other, causing the saw to cut at an angle if the bar and the chain are not properly maintained.

Guide Bar Maintenance


- Clean the bar daily, as debris can accumulate in the bar grooves and restrict chain movement, preventing proper lubrication of the bar and chain with bar oil.
- Rotate the bar each day to promote even wear.
- Rails should be inspected daily to prevent premature wearing of the bar and chain. If cutting problems occur, including thrown chains, inspect for the following conditions:
 - The rails are worn and the groove is shallow. If the tie straps do not touch the rails, replace the bar.
 - Burrs have developed on the outside edges of the rails. Remove them with a flat file.
 - One rail is worn lower than the other, causing the chain to cut at an angle. The bar must be ground using a specialized bar grinder.

- Blue discoloration indicates excessive heat, often caused by a lack of lubrication, poor cutting methods that push the drive links to the side, an overly tight chain, or a dull or improperly filed chain.
- Excessive wear appears only behind the sprocket-on-sprocket nose bar. This is typically caused by heavy use near the nose of the bar (such as limbing) or by a chain that is too loose. Periodically turning the bar over can help reduce this wear.
- The bar is bent, which may be caused by improper cutting techniques, the saw pinching or becoming bound in the cut, or improper transportation. Some bars can be straightened at a shop that has the proper equipment.
- Chain sprocket wear is normal but is also accelerated by the chain being too loose. A worn sprocket can cause additional wear to both the chain and the guide bar. Replace the sprocket when worn beyond 0.5mm.
- Rim sprockets are frequently overlooked but should be checked regularly by either measuring or looking at the built-in wear guide.
- One bar typically lasts for about four chains and two sprockets.

Diagnose guide bar wear and damage.

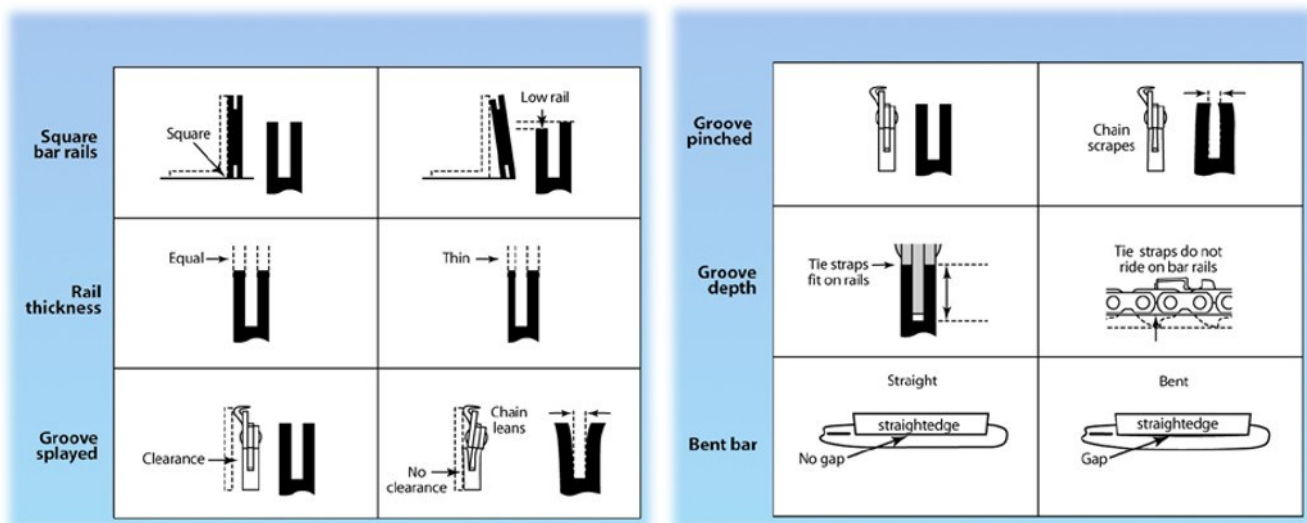

Check for excessive rail wear, chain-to-rail clearance, and bar tip deformation.

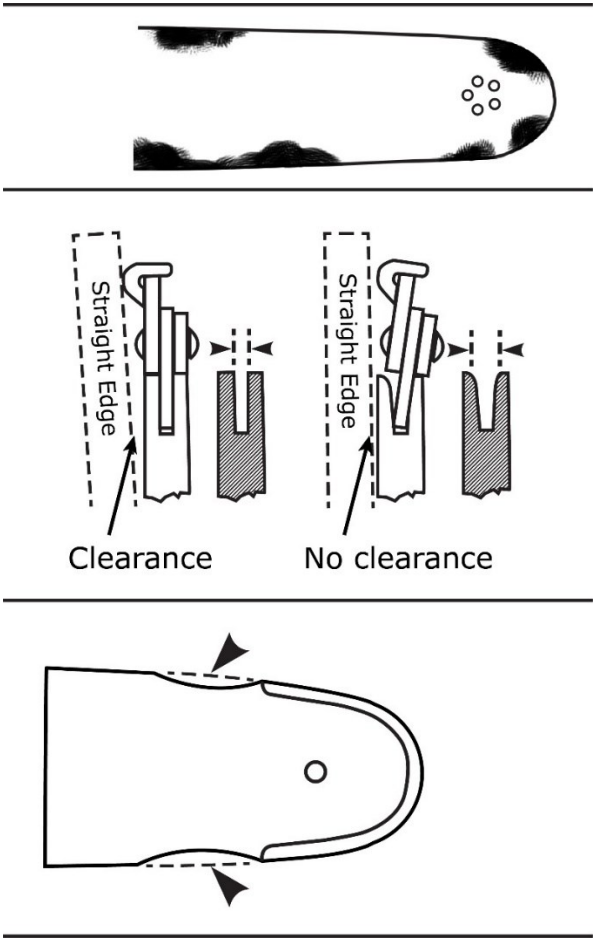

Suggested Saw Maintenance Guidelines

Daily Field Maintenance

- Fill fuel and bar oil.
- Sharpen the chain using the file guide.
- Use the depth gauge tool to check the depth gauge.
- Inspect the wear of the chain. Use indicators on the driver.
- Remove the side cover plate and clean all buildup/debris.
- Clean bar grooves and chain oil the hole on the bar.
- Inspect the bar for wear and burrs, and file if needed.
- Grease tip on bars if applicable; many bars do not need to be greased.
- Flip the bar.
- Check the drive sprocket for wear using the sprocket tool.
- Inspect and either clean or replace the air filter per the manufacturer's recommendations.
- Report any damage to the supervisor.
- Record tanks that were run at the end of every shift.
- Record any parts replaced.
- Store the saw with the switch in the STOP position.

Shop Maintenance When Returning to the Station

- Ensure all field maintenance is complete.
- Inspect anti-vibration mounts.
- Inspect the fuel filter.
- Check the sparkplug for proper gap and fouling.
- Clean the air filter using soap and water. Do not use compressed air on filters.
- Use compressed air to thoroughly clean out buildup/debris.
- Check the gap between the magneto and the flywheel.
- Ensure the spark arrestor is clean and functional.
- Examine the clutch for stretched springs or springs cutting into the eyehole.
- Grease the crankshaft hub using high-speed lithium grease.
- Clean fins on the flywheel.
- Clean fins on the cylinder head.
- Replace any damaged parts.
- Tighten all spline and pan head screws.
- Report any replacement parts that need to be ordered.
- Store saw with the switch in the STOP position.

Chainsaw Repairs

Standards

- Sawyers can troubleshoot and resolve common chainsaw mechanical problems.

Narrative

Engine Troubleshooting

Chainsaw problems can typically be narrowed down to fuel, air, or spark issues.

Check Fuel

- Fuel mix — ensure the correct fuel-to-oil ratio is used.
- Fuel filter — ideally, carry a spare fuel filter.
- Fuel line — check the fuel line to ensure it is not cracked or broken.

Check Air Flow

- The air filter removes airborne contaminants from entering the chainsaw's combustion chamber. When the air filter becomes clogged, the amount of air reaching the combustion chamber is drastically reduced, which can result in poor performance, sputtering, or failure to start.
- Ensure the muffler and spark arrestor screen are clean; debris buildup could restrict exhaust flow.
- Check that all hoses and gaskets are secure, as leaks within the system can affect performance.

Check Spark

- Remove the spark plug from the cylinder and attach the spark plug wire to the plug.
- Touch the spark plug's electrode tip to a metal surface on the engine and pull the starter cord.
- If a spark is visible, the electrical system is working.
- If no spark is observed, inspect the spark plug electrode for carbon buildup, damage, wear, or incorrect gap spacing. Carrying a spare spark plug in the field is advisable.
- The color of spark plugs can provide valuable insights into the fuel mixture and engine performance. Dark deposits indicate a rich mixture, white indicates a lean mixture, and light brown reflects an optimal burn.

Spark plug color indicators.



Checking for Compression Problems

If the chainsaw does not start when the starter rope is pulled, and the previous checks have been completed, the issue may be related to compression.

Compression is generated by the engine via the crankcase and the combustion chamber. When compression is too low, the engine may experience reduced power or a complete shutdown because it cannot maintain enough pressure in the cylinder to run efficiently.

A simple field check for low compression is to place the chainsaw on the ground and use the starter rope to lift it. With good compression, the resistance will prevent the rope from pulling out, and the saw's weight can be carefully lifted by the starting cord. If the rope slowly extends or offers little resistance, compression is likely low, and the saw needs further evaluation.

The most common location for air leaks to occur is on the crankshaft seals. Damage to the piston or the piston rings may also cause the problem. Piston rings are designed to contain cycle pressures, ensuring the force from combustion is spent pushing the piston down on the power stroke. When a leak is present, cycle pressure can leak into the crankcase, resulting in a loss of power or inability to start the engine.

Bring the saw to a qualified repair shop if needed.

It is highly recommended that inexperienced or beginner sawyers do not attempt to tune saws.


Tuning

Variations in fuel composition and changes in elevation may require periodic carburetor tuning. Carburetor adjustments should be performed using a tachometer to ensure accurate engine speed settings. A saw that is difficult to tune may be an indicator of other problems, such as an air leak in the crankcase or bushings, a damaged or dirty carburetor, improper fuel mix, or bad gas. Before tuning, identify the specific saw's recommended factory setting for high and idle revolutions per minute (RPM).

Basic Tuning with a Tachometer

- Make sure the air cleaner is clean, and the saw has at least a half tank of fuel.
- Start the saw and let it idle for at least five minutes to warm up.
- Set carburetor screws to factory settings; typically, turn H and L screws clockwise all the way and out one full turn counterclockwise. Exact settings are saw-specific, so be sure to follow the manufacturer's settings.
- Using a tachometer, set the Low idle speed to 2,500 RPM. Never attempt to tune a saw by ear.
- Set the engine speed to 3,300 RPM with the LA (low-speed air adjustment) idle screw. The saw should idle smoothly without any chain spin. Reset the Low idle speed if necessary.
- Adjust the High screw to about 500 RPM less than the manufacturer's recommended maximum RPM. Fine-tune L and LA screws if necessary.

Chainsaw carburetor screws.



Importance of High-Octane and Ethanol-Free Fuel

Low-octane fuel burns more quickly than high-octane fuel, leading to inefficiency and increased wear in small engines. While many saw manufacturers recommend 89-octane fuel, the use of 91-octane premium grade is strongly recommended and often pays for itself through improved performance and reduced maintenance issues.

Ethanol easily attracts and absorbs moisture from the air. As water is absorbed in an ethanol-gasoline blend, phase separation can occur, causing the ethanol-water mixture to separate from the gasoline.

This heavier ethanol-water mixture settles to the bottom of the equipment's tank or storage can, leaving a layer of gasoline floating on top.

Once separation occurs, the remaining gasoline now has a lower octane level than the original blend. This can lead to hard starting, unsafe high idle speeds, stalling, and ultimately engine damage or fuel system failure, resulting in costly repairs.

Additionally, ethanol's solvent properties can dissolve varnish and gum deposits that have formed inside fuel cans, fuel tanks, or the equipment's fuel system. Those loosened contaminants can then be carried into the carburetor and other sensitive components, further increasing risk of performance problems and mechanical damage.

Chapter 4 — Risk Management, Sizeup, and Complexity

Risk Management

There are many locations where extreme conditions exist because of drought, insects, disease, and fire-related tree mortality. Sawyers should remain vigilant and avoid working under these extreme conditions.

Risk Management is a continuous, systematic process of identifying and controlling hazards to increase the certainty of outcomes. This process includes detecting hazards, assessing risks, implementing controls, and monitoring risk controls to support effective risk-based decision making. Risk management seeks to harness feedback and input to make the most informed decisions possible while reducing unintended outcomes.

The risk management process for chainsaw operations is as follows:

- Step 1. Identify Hazards (situational awareness) — Outside-In, Top-Down Approach
- Step 2. Assess Hazards — Procedural Sizeup
- Step 3. Develop Controls and Make Risk Decisions — Complexity Analysis (opportunities to reduce complexity), Validate Objective
- Step 4. Implement Controls — Mitigation Measures, Go/No-Go
- Step 5. Supervise and Evaluate — Stump and Outcome Analysis

Step 1. Identify Hazards — Outside-In, Top-Down Approach

The “outside-in, top-down approach” is a systematic procedure to assess the conditions across the entire work area before engaging in the cutting operation.

The goal is to observe the big picture first, starting with a wide-angle lens and then moving in, narrowing focus to the point where the cuts will be made.

Visualize the approach as a concentric circle with the big picture on the periphery, the work areas in the middle, and the cutting area at the center.

Outside-in, top-down approach.



Look up, down, and all around for potential hazards before moving slowly toward the center of the cutting area. After the hazard analysis step, move on to the procedural sizeup.

Step 2. Assess Hazards — Procedural Sizeup

Narrative

Many accidents have been attributed to a poor or incomplete sizeup of the overall cutting operation, including the evaluation of the tree to be felled, limbed, or bucked. Verbalizing the procedural sizeup is required to ensure everyone involved in the cutting operation understands the cutting plan. The procedural sizeup ensures sawyers evaluate each cutting situation encountered in an organized and consistent manner.

Standards

- Sawyers complete a procedural sizeup prior to engaging in chainsaw operations.
- Sawyers understand the relationship of the ongoing sizeup, human factors, environmental hazards, risk, and complexity.

The minimum components of a procedural sizeup include:

1. Identifying a specific obtainable objective.
2. Identifying known hazards of the operation.
3. Recognizing leans or binds present.
4. Developing an escape plan.
5. Developing a cutting plan.
6. Determining complexity.
7. Making a Go/No-Go decision.

Objective

The objective establishes the overall intent for the cutting operation and outlines the sequence of events. The objective may be for a single tree felling scenario or a routine chainsaw operation (limbing, bucking, brushing) along a piece of fireline. Predict the outcome of each planned cut and develop an objective that sequences the work safely and efficiently.

Hazards

Identify and Communicate the Hazards:

- Human factors — physical and/or mental condition, operational pressure.
- Weather hazards — outflow winds, general winds, approaching storms, precipitation, etc. Evaluate crown movement from wind and determine impacts on the cutting operation.
- General tree and/or stand health hazards — species and tree type weaknesses, disease, or damage from fire/weather events (e.g., fire-weakened or fire-hardened wood fibers, coniferous or deciduous species, sound or rotten wood, live or dead trees, or hollow trees). Reference Chapter 8: Tree Anatomy and Defects Contributing to Failure.
- Terrain hazards — steep slopes, rocks, soil moisture and composition, uneven footing, and fuel type and density.
- Overhead hazards — fire-weakened material, rotten/broken tops, broken limbs, loose bark, tied limbs, leaners, and hung-up trees. Overhead hazards contribute to determining the “good side” and “bad side” of the tree.

- Work area hazards — hazards associated with personnel, equipment, and maintaining work area control. Chainsaw operations can become mission-focused, leading to a loss of situational awareness. As the work area changes, continually reassess Lookouts, Communications, Escape Routes, and Safety Zones (LCES). See Appendix A for more information on LCES.
- Cutting area hazards — hinge wood integrity, presence of fire, insects, poisonous plants, spring poles, tree species, sound or rotten wood, etc. Body positioning/mechanics and cut sequence also critical cutting area considerations.
- Values — infrastructure, personnel, or property to be avoided.
- Equipment limitations — bar length, sufficient fuel/oil supply, saw condition, wedges, and pounder available.
- Time — adequate time to safely meet objectives.

Leans and Binds

Identify leans and binds as they relate to the objective. Refer to Determining Lean in Chapter 7.

- The natural lean is the direction a tree would land if it fell over on its own. This helps identify the “good side” and “bad side” of the tree.

Sawyers have been injured and killed when their escape paths were established on the bad side of a tree. They were struck attempting to escape when cutting sequences or tree conditions led to unpredictable outcomes.

- The calculated lean is determined by using a plumb bob to measure the amount of forward/back and side lean in relation to the objective. The amount of lean is expressed as the distance in feet between the plumb line and the center of the bole.
- Determine front-to-back lean by standing on either side of the tree perpendicular to the objective (intended lay) and a tree length away, if possible. Observe from both sides of the tree if the lean is more difficult to determine.
- Determine side-to-side lean by standing in line with the objective, either in the intended lay or directly opposite the intended lay and a tree length away, if possible. Observe from both sides of the tree if the lean is more difficult to determine.
- Consider the weight distribution of the limbs when determining lean. For trees with large crowns, estimate the crown center to determine the tree's lean using a plumb bob.
- Determine binds by identifying areas of tension and compression.
- Predict the reaction of cut material to identify the safe location to complete the cut.

Escape Plan

- An escape plan has a minimum of two escape paths, identified as “primary” and “secondary.” To ensure safety, both paths must be cleared of obstructions to a reasonable degree.
- Escape paths are predetermined routes that allow sawyers to move away once the tree begins to fall or the bucked log begins to move.
- Escape paths are angled away from the hazard and lead to safe areas.

- Safe areas may include a large, solid tree or rock for protection.
- Re-examine and communicate the escape paths before beginning the final cut. An escape plan must remain flexible and adaptable to account for changing conditions and the unexpected.

Cutting Plan

Develop a cutting plan to determine which techniques and sequences will be used to achieve the objective.

Felling:

- Undercut type and depth — conventional, Humboldt, or open-faced.
- Hinge — length, width, and condition of wood fiber.
- Stump shot height — determine the amount of stump shot needed.
- Backcut type — traditional or modified.
- Wedge plan — placement, number and type of wedges, and felling axe/pounder placement.

Bucking:

- Cut sequence — determine the type, order, and location of the cuts needed.
- Wedge plan — placement, number and type of wedges, and felling axe/pounder placement.
- Reaction prediction — predict how the material will move to identify the safest location to complete the cut.

Step 3. Develop Controls and Make Risk Decisions — Complexity Analysis, Validate Objective

Complexity is a result of internal and external factors that affect a sawyer's ability to safely manage saw operations. Complexity is assessed using the components of the procedural sizeup and identifies the level of knowledge, skill, and sawyer certification needed to conduct the saw operation safely. Sawyers should take every opportunity to reduce operational complexity.

Standards

- Sawyers effectively determine the complexity of a cutting operation and realize it is one of the most important processes to understand and implement.

Narrative

The factors identified in the Complexity Fade Chart serve as a guide to determine the overall complexity of a cutting operation during each step of the procedural sizeup. These different factors are not to be considered definitive, but are used as tools to assist sawyers in evaluating complexity and to ensure it aligns with their knowledge, skill, and certification level.

A hazard, along with the extent to which sawyers can mitigate it, directly affects the risk and complexity of the operation. Mitigations can reduce operational complexity: if a hazard cannot be mitigated, sawyer must reevaluate the objective of the operation.

Complexity Fade Chart

The Complexity Fade Chart provides a structured framework for comparing the factors that influence the difficulty of safely felling a tree. It organizes key considerations — such as available felling options, hazards, tree leans and binds, escape path accessibility, and required cutting techniques — into three levels of complexity: low, moderate, and high. By clearly outlining how these elements change as complexity increases, the chart helps assess risk and determine the appropriate approach for a safe and effective tree felling operation.

Complexity Fade Chart

	LOW COMPLEXITY	MODERATE COMPLEXITY	HIGH COMPLEXITY
OBJECTIVE	Multiple options available to safely fell tree	Limited options available to safely fell tree	Single option available to safely fell tree
HAZARDS	Minimal hazards are present that will impact cutting operation	Hazards are present but can be easily identified and understood	Hazards are present but may be mitigated by altering cut plan and technique
LEANS AND BINDS	< 3 ft of side/head lean - No back lean with intended lay - Known low release of energy - No wedging/sequence of cuts	3-5 ft of side/head lean 1" of lift to overcome back lean - May require wedging	> 5 ft. side/head lean 1"-2" of lift to overcome back lean - High release of energy expected
ESCAPE PLAN	- Escape path is clear - Multiple escape paths – easily accessible	Access to escape could be limited; only one path available	Access of escape path(s) could be difficult and/or in steep terrain
CUTTING PLAN	- Single cut undercut - Green or sound hinge - Cuts can be made from 1 side of tree – escape to same side	- Compromised fiber - Double cut undercut/backcut - Requires moving from side to side of tree	- Requires more than double cut - Terrain makes plan difficult - Involves elaborate sequence, wedging, compromised fiber

Step 4. Implement Controls — Mitigation Measures, Go/No-Go Decision

A go/no-go decision refers to a sawyer's decision of whether to proceed with the planned operation or adjust based on the hazard controls and mitigations identified. This decision is based on the factors identified in the procedural sizeup, evaluation of complexity, and established risk mitigations. The decision to proceed may change over time as conditions change or when a new objective is selected.

Step 5. Supervise and Evaluate — Stump and Objective Analysis

Sawyers will regularly evaluate their performance to develop a better understanding of their techniques and ability to predict outcomes based on the cutting plan. They proactively share lessons learned and seek opportunities for continual learning. Stump analysis and objective review provide sawyers with immediate feedback on their technique and ability to predict the results of each cut.

Chapter 5 — Basic Saw Operations and Handling

Starting a Chainsaw

Standards:

- Sawyers use correct starting procedures as described by OSHA.

Narrative:

OSHA's Safe Operation of a Chainsaw, 29 CFR 1910.266(e)(1) and (e)(2), specify the practices required for safe operation before starting the saw and while running the saw. For more information, please refer to Safe Operation of a Chainsaw, <https://www.osha.gov/etools/logging>.

Do not drop-start a chainsaw. This method is extremely dangerous because it provides no control over the saw.

Starting the Chainsaw on the Ground

1. Set the chain brake.
2. If the saw has a choke, turn the choke on.
3. Place the saw on firm ground, ensuring the bar and chain do not contact anything.
4. Put your foot in the rear handle and keep a firm grip on the front handle with your hand.
5. Pull the starter handle with the other hand. Repeat until the engine fires. If available, shut the choke off once the saw fires.
6. Accelerate the engine to idle, then release the chain brake.

Starting the chainsaw on the ground.



Starting the Chainsaw Standing Up

1. Set the chain brake.
2. Place the rear handle between the thighs and behind the knees. Hold the front handle firmly with the other hand.
3. Slowly pull on the starter rope until the starting mechanism engages, then finish with a quick pull to start the saw.
4. Repeat pulling the starter handle with the other hand until the engine fires.

5. Ensure the bar and chain do not contact anything.
6. Accelerate the engine to idle, then release the chain brake.

Starting the chainsaw standing up.



Transporting a Chainsaw

Standards

- Sawyers use correct techniques for carrying the chainsaw.

Narrative

Walking with a Chainsaw

- When carrying the saw for short distances (less than 50 feet), set the chain brake. Always carry the saw in a way that prevents the chain, muffler, and dogs from contacting the body.
- When carrying the saw for more than 50 feet or across hazardous terrain, shut the saw off. In hazardous conditions, such as when traversing slippery surfaces or heavy underbrush, sheath the saw.

When carrying the saw on the shoulder, take extra care due to the sharpness of the chain and the dogs. Wear a long-sleeved shirt, gloves, and a shoulder pad. The bar, chain, and dogs should be covered, preferably with a bar and chain sheath. Avoid direct skin contact with the muffler and power head. Chainsaw chaps can also be used to cover the dogs.

Transporting Chainsaws in a Vehicle

- Keep the bar and chain covered with a chain guard or chaps.
- Properly secure the chainsaw to prevent damage and fuel from spilling.
- Never transport a chainsaw or fuel in the passenger compartment of a vehicle.

Safe Handling

Standards

- Sawyers use correct techniques and body position when operating the chainsaw.
- Sawyers understand reactive forces and their causes, including bind and kickback.
- Sawyers understand boring techniques and when they are applicable.

Narrative

Handling Techniques and Body Position


The sawyer's thumb and forefinger should always be fully wrapped around the handlebar, regardless of saw orientation. Proper hand placement is essential for maintaining control of the chainsaw, especially in the event of reactive forces (kickback, pushback, and pull-in).

Full-wrap handlebars are designed for use with both hands during felling, allowing for more cutting options. Generally, cutting with the bottom of the bar increases efficiency and decreases fatigue.

Sawyers should **never**:

- Operate a chainsaw with one hand. Always maintain balance between both feet and distribute the saw weight equally across the body to safely respond to kickback.
- Cut while proper balance cannot be maintained.
- Attempt to remove materials caught in the chain, drive sprocket, handlebars, or powerhead while the chainsaw is running.

Cutting forces in different bar locations.

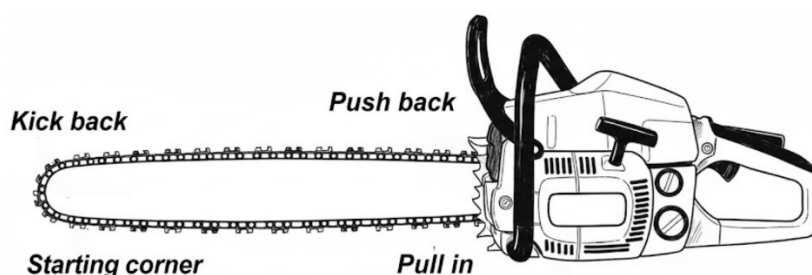

Kickback

Kickback is the sudden, upward motion of a chainsaw's guide bar and is a common cause of chainsaw-related injuries. If proper cutting techniques are not followed, the unexpected kickback of a chainsaw can be very dangerous and may result in serious injury. Kickback can occur while felling, limbing, bucking, or brushing.


Kickback typically occurs under two circumstances:

- When the moving chain at the bar tip (nose) of the guide bar strikes an object.
- When the wood closes in and pinches the saw chain in the middle of the cut.

Kickback zone on the upper quadrant of the chainsaw bar's tip.

Kickback can occur when the bar tip contacts material at a bad angle.

Kickback occurs in fractions of a second.

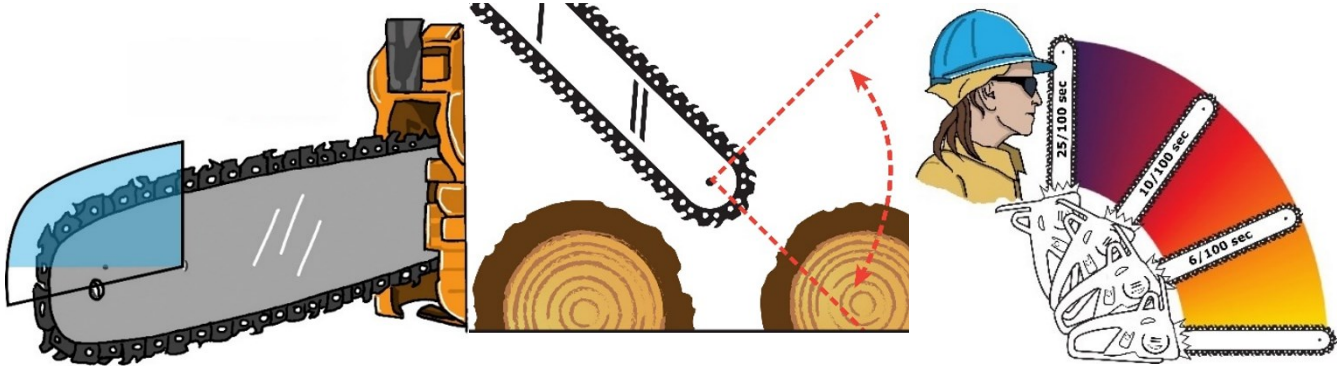

Many factors determine the severity of the kickback:


- Chain speed.
- Angle of chain contact.
- Condition of the chain.
- The speed at which the bar contacts the object.

Ways to Avoid Kickback Injury

- Hold the saw with both hands, securely gripping the handle and the handlebar between the thumb and forefinger.
- Stand to the side of the kickback arc while cutting, and ensure swampers are positioned safely.
- Be aware of the location of the bar's tip, and use caution when cutting more than one piece of material at a time.
- Never overreach or cut with the power head higher above shoulder height.
- Pull the saw smoothly out of the cuts and watch for any movement that may pinch the chain.
- Use caution when entering a partially completed cut.
- Use a low-kickback chain that is properly sharpened and tensioned.

Pushback

Pushback can occur when utilizing the top of the bar in a cut, causing the saw to drive straight back toward the sawyer.

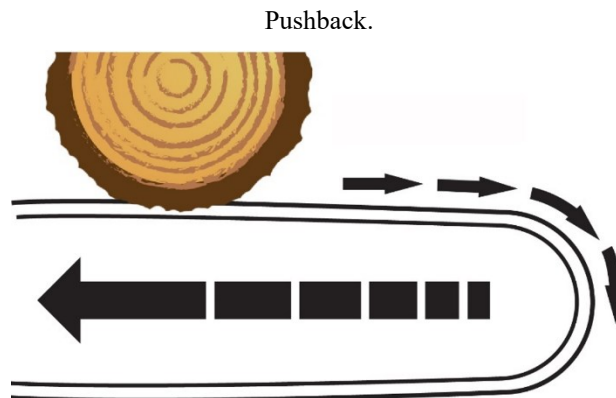

Anticipate pushback and pull-in by:

- Watching the kerf and the log for any movement that may pinch the bar.
- Maintaining stable footing and proper body positioning.
- Holding the chainsaw firmly when making cuts.


Boring

Boring cuts can be used in bucking operations, evaluating wood fibers during tree sizeup, and in certain backcut situations.

Whenever boring:

- Hold the saw firmly and position yourself in a location outside the kickback arc.
- Only use the bottom half of the bar tip when beginning a bore.
- Engage the material with full throttle before cutting into the wood surface.
- Once the tip has fully engaged into the cut and a kerf is established, maintain full throttle and continuous pressure while holding the saw steady, and plunge the bar in perpendicular to the tree.
- If the chainsaw begins to jump or kick back in the cut, twist the handle of the saw slightly while maintaining continuous pressure in the desired orientation.

How to counteract chainsaw jump or kickback.

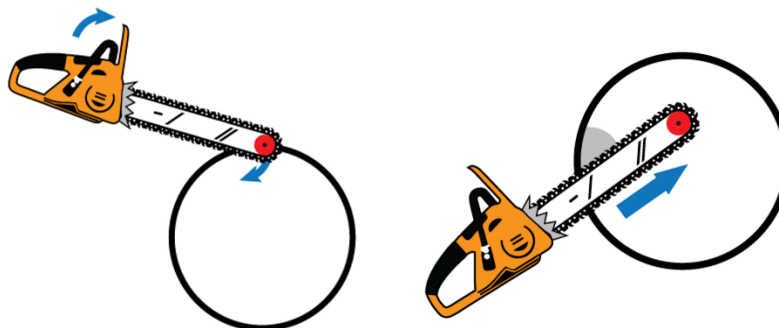

Sawyer/Swamper Teams

Standards

- Prior to saw operations, sawyer/swamper teams establish responsibilities and verbal and nonverbal communications.
- Sawyer responsibilities are identified and implemented prior to chainsaw operations.
- Swamper responsibilities are identified and implemented prior to chainsaw operations.

Narrative

Sawyers often operate chainsaws very close to swampers, which can present important safety considerations. Swampers should wear the same PPE as the sawyer. Both the sawyers and the swampers share responsibility for each other's safety and for maintaining control of the cutting area. This operation requires constant communication and adherence to pre-established protocols.

Sawyer Responsibilities

- Discuss the brushing, limbing, and bucking plans with the swamper.
- Maintain awareness of the location of and proximity to the swamper.
- Develop a process with the swamper to safely remove cut material.
- Cut material to facilitate safe and efficient removal.
- Maintain cutting area control.
- Develop a process to maintain situational awareness.

Swamper Responsibilities

- Discuss the brushing, limbing, and bucking plans with the sawyer.
- Ensure the sawyer is aware of your presence when working within reach.
- Only approach when the sawyer indicates it is safe to do so.
- Never push or pull on material while the sawyer is cutting it.
- Help identify hazards and maintain situational awareness.
- Ensure other crew members do not approach the sawyer directly; they should approach the swamper, who will then alert the sawyer.

Chapter 6 — Brushing, Limbing, and Bucking

Cutting Area Safety

Standards

- Sawyers determine whether a tree can be limbed or bucked safely, or if there are other options such as moving the fireline, using equipment, or creating no-work zones.
- Always perform a hazard analysis when entering new work areas, and either mitigate the hazards or establish a no-work zone.
- Sawyers establish cutting area control.
- Sawyers coordinate with other saw teams to avoid working directly above or below them.
- Establish an escape plan when brushing, limbing, and/or bucking.
- Cut limbs, stems, and stobs flush to the ground or bole to minimize tripping and impalement hazards.
- Sawyers recognize and mitigate spring poles during the cutting operation.

Narrative

- Always inspect the work area for overhead hazards. Mitigate the hazards or change locations.


Hazard trees and leaners need to be removed. Otherwise, change locations.



- Develop a work plan with others in the area, including clearly defined work area boundaries and swamper-sawyer safety protocols.
- Saw teams should never work directly below one another. Teams must coordinate with others to minimize exposure directly below one another.
- Warn workers who are in or below an active cutting area. Allow time for them to move to a safe location, and verify their safety visually and verbally.
- Never approach a cutting operation from below until the sawyer has granted permission.

- Establish and maintain escape paths during brushing, limbing, and bucking. As cut material accumulates, safe footing and egress may become more difficult, so continually identify new escape paths to minimize risk.
- Engage the chain brake whenever walking between cuts and shut the saw off when moving further than from tree to tree.
- Cut limbs, stems, and pointed stobs flush to the ground, leaving no more than couple of inches. Avoid leaving pointed stems that could cause injury or create a tripping hazard.
- Spring poles are trees pinned under tension. They can release tremendous force when cut, potentially striking the sawyer or throwing the chainsaw back.

Hazardous spring poles.

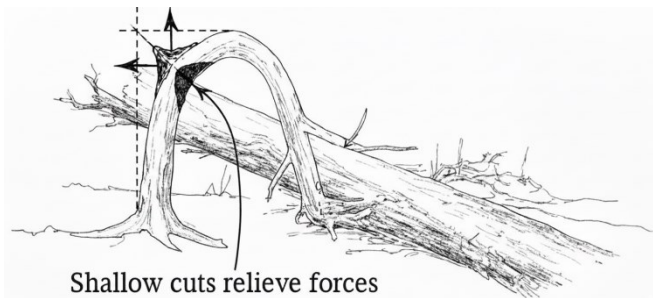

- To safely remove spring poles, start by relieving some of the tension in a controlled manner. Stand back a safe distance and make a series of shallow relief cuts about ½ inch apart on the underside of the spring pole.
- Avoid cutting too deeply. Stop as soon as movement is detected, remove the saw, and begin the next cut. Four to six cuts on the underside of the spring pole should be sufficient.
- Make the release cut from the top, about one-half inch past the end of the series of cuts on the underside, on the piece that will fall to the ground. Be clear on which piece will be released.

Brushing

Standards

- Sawyers determine the cutting sequence to meet the cutting plan.
- Sawyers understand high potential for thrown chain and kickback during brushing operations.
- Sawyer and swamper will establish best practices for clearing cut debris.
- Sawyers maintain proper footing, balance, and saw control.

Narrative

- Brushing is cutting and clearing small-diameter material such as brush, branches, and/or trees.
- The chain is more likely to be thrown cutting small materials. Lateral movement of the saw while cutting significantly increases the chance of a thrown chain.
- Operating a saw close to the ground increases the chances of kickback and chain damage. Sawyers must watch out for rocks, dirt, and material that may cause kickback.
- Always maintain awareness of the tip of the bar.

- Check chain tension often.
- Continuous brushing may require sawyers to work in a crouched position for long periods of time, potentially straining back and arm muscles.
- Rotate sawyers often in brushing situations to reduce fatigue.
- Maintain a communication plan and ensure the swamper stays clear of the kickback zone.

Limbing

Standards

- Sawyers determine the cutting sequence to meet the cutting plan.
- Sawyer and swamper establish best practices for clearing cut debris.
- Sawyers maintain proper footing, balance, and saw control.

Narrative

- Limbing is the removal of branches from the bole of a fallen tree to prepare it for bucking, or the removal of limbs from standing trees.
- Small trees can be limbed while still standing, which may reduce bar tip exposure and kickbacks.
- Limbs should only be removed from standing trees to a height safely reachable by the sawyer, not to exceed shoulder height.
- Avoid cutting or scarring the tree bole; make cuts just outside of the bud swell of the limb.
- Always identify escape paths and monitor the tree for movement, such as rolling or dropping.
- Ensure the stem is severed from the stump unless it is beneficial to keep it from rolling. Begin cutting limbs on one side, identifying any supporting limbs. If the tree is large enough to cause harm if it rolls or settles, consider cutting supporting limbs last or during the bucking sequence.
- Anticipate the movement of a downed tree before cutting supporting limbs.
- To minimize tip exposure and kickbacks, the swamper should clear debris as limbs are cut.
- When cutting a heavy limb, make a small cut on the underside first, followed by the top cut to fully sever the material.

Bucking

Standards

- Sawyers determine the cutting sequence to meet the cutting plan.
- Sawyers identify the good and bad sides of a log, which is typically on the downhill side or tension side of the log.
- Sawyers understand the effects of binds and technique mitigations needed.
- Sawyers recognize the location of tension and compression.
- Sawyers recognize, anticipate, and predict the potential movement and reaction of the cut material.

- Sawyer and swamper establish best practices for clearing cut debris.
- Sawyers maintain proper footing, balance, and saw control.


Narrative

- Bind determines the bucking techniques and procedures to be used.
- Look for indicators such as landforms, stumps, blow down, and other obstacles that prevent a log from lying flat, which may create binds.

Tension and Compression

- Tension is when wood fibers are stretched apart, and the kerf opens as a cut is made.
- Compression occurs when wood fibers are pushed together, and the kerf closes, pinching the bar.


The log is being pulled apart by tension force and pushed together by compression force.
Areas of tension and compression occur on opposite sides of the log.

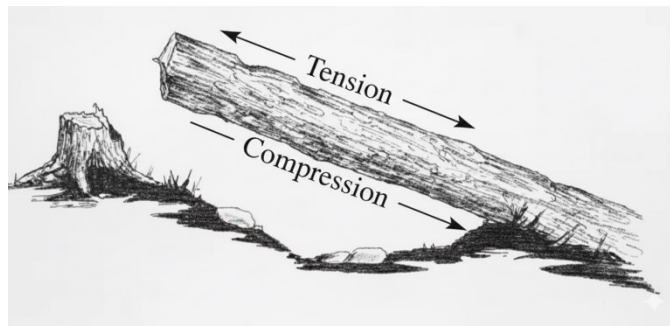

Four Main Locations of Bind

- Top bind — tension is on the bottom of the log with compression on top.
- Bottom bind — tension is on the top of the log with compression on the bottom.
- Side bind — pressure is exerted sideways on the log, and the tension side is usually bowed out.
- End bind — weight compresses the log's entire cross-section.

Locations of binds.

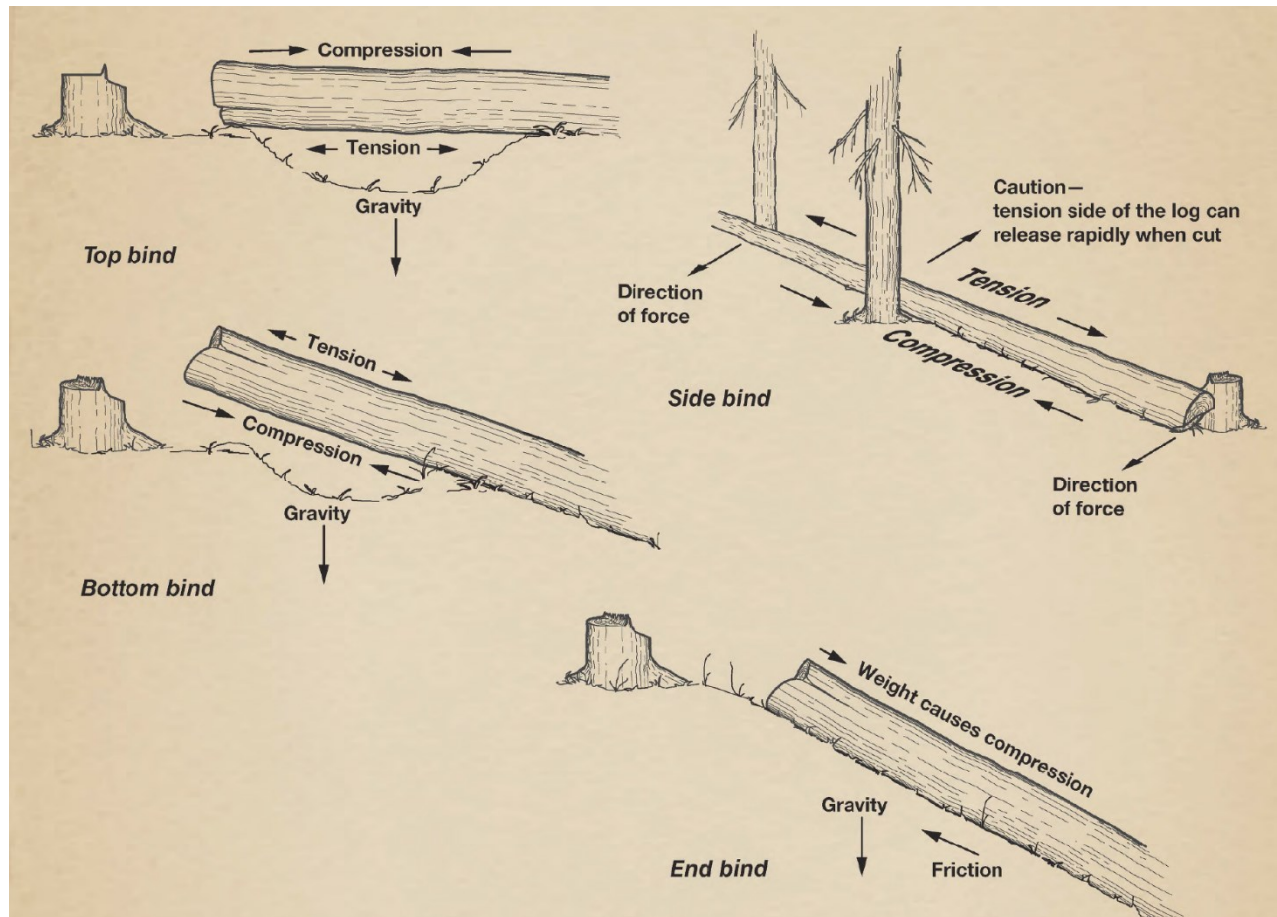


Prior to Bucking

- Identify the good and bad side: Typically, in a bucking situation, the bad side is on the downhill side or tension side of the log.
- Swamp out bucking areas for debris and ensure escape paths are unobstructed.
- Inspect the log for binds, pivot points, and natural skids.
- Identify and mitigate any spring poles bent under the log being bucked.
- Anticipate the reaction after the release cut has been completed.
- Be aware that falling or rolling root wads are unpredictable when compression is released.
- Protect personnel below the cutting area; never allow workers to be in the path of rolling logs.
- Be aware that rocks and foreign objects under the log may cause the log to roll, slide, or even pivot uphill.
- Recognize that hidden limbs may roll with the log and entangle the sawyer.

Bucking Techniques

- Establish good footing, anticipate the movement of the tree, and be ready to step away.
- On large trees, begin bucking by cutting the offside first. This is the side to which the log might move when it is cut, usually the downhill side. Cut straight down until there is space for a wedge. Observe the kerf for movement, which will indicate the location of a bind.
- Use the saw's dogs as a pivot point when bucking. This technique will enhance the sawyer's control of the saw and improve the saw's efficiency while reducing fatigue.
- When the offside has been cut first, the sawyer can finish stepping away from the danger. In most situations, it is safest to buck logs from the uphill side unless the log could pivot uphill.
- It is typically safest to start bucking at the small end of the log and work toward the butt end, removing the binds in the smaller material first. On steep slopes, it may be safer to begin on the upslope portion of a log to reduce the risk of the log sliding or rolling downhill.
- When possible, remove compression before tension to minimize the chance of the bar being pinched.
- Various techniques can be used to control bucked sections. For example, angles can be used to prevent a section from rolling down a slope.


Angles used to prevent downslope roll.

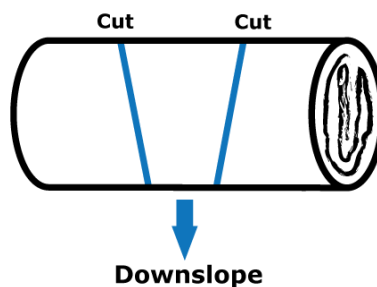

- Angled cuts may allow greater clearance for moving a section after bucking.
- Cut pieces small enough so they are easier to control.
- Roots of blow down could be forced into the sawyer's position if the roots drop or roll. If limbs are preventing the root movement, consider leaving them in place.


Top Bind

1. Cut from the top down, stopping before the kerf closes and pinches the bar.
2. Partially cut offside to allow the sawyer to step back when finishing the cut.
3. Finish by cutting from the bottom up while stepping away from the log.

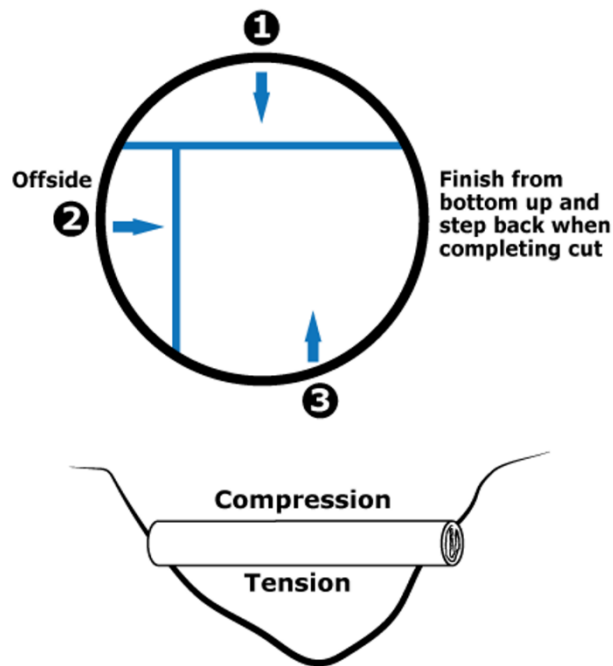


Bottom Bind

1. Cut from the bottom up, stopping before the kerf closes and pinches the bar.
2. Partially cut offside to allow the sawyer to step back when finishing the cut.
3. Finish by cutting from the top down while stepping away from the log.

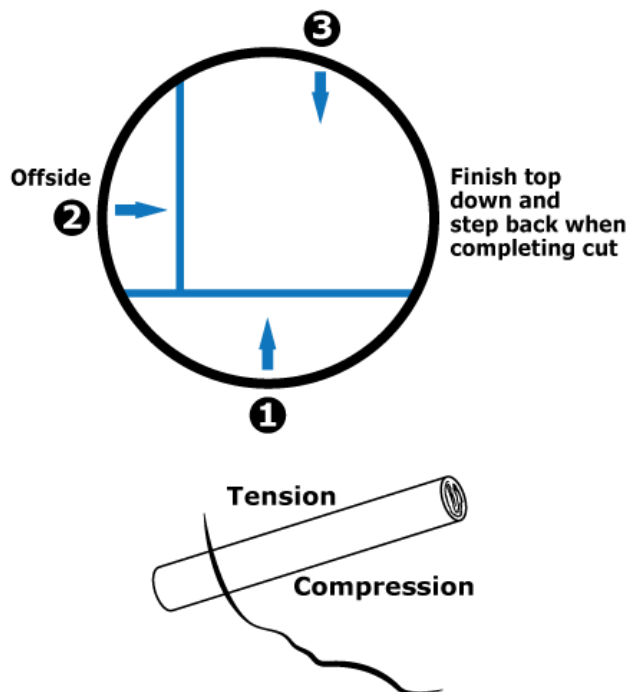


End Bind

1. From the top side of the log, cut as much of the offside that can be safely reached.
2. Leave the saw in the kerf and continue cutting around it just enough to insert a wedge.
3. Cut the remaining wood downward to finish the cut.
4. For smaller-diameter logs, an offside cut may not be necessary.

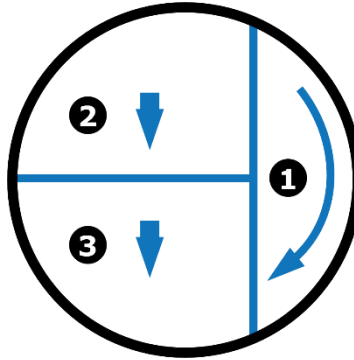

Side Bind

1. Make the initial cut on the compression side.
2. Finish the cut by reaching across the log to cut the tension side.
3. Whenever possible, remain on the compression side or the good side.

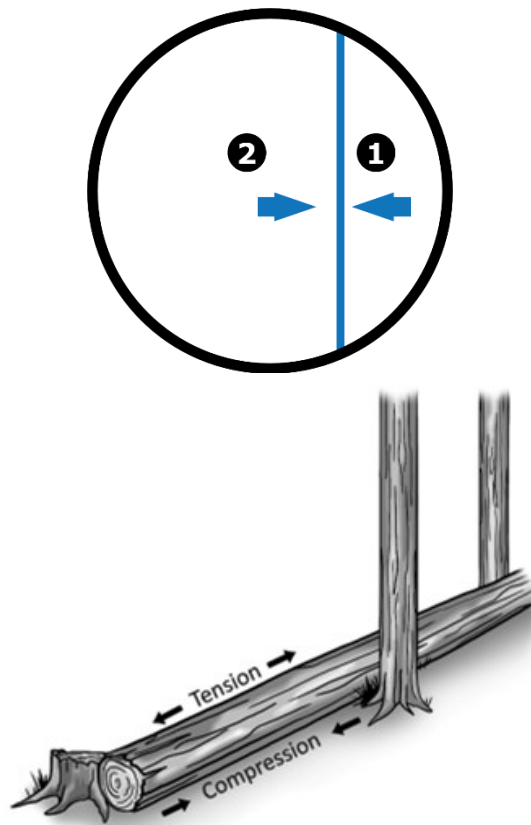

Chapter 7 — Directional Felling

Directional Felling

Standards

- Sawyers utilize the risk management process to determine if a tree needs to be felled or if there are other options, such as moving the fireline, using equipment, or creating no-work zones.
- Sawyers complete a procedural sizeup prior to engaging in felling operations.
- Sawyers understand the relationship of the ongoing sizeup, human factors, environmental hazards, risk, and complexity.
- Sawyers understand that determining the complexity of a felling operation is one of the most important processes for a sawyer to understand and implement.
- Sawyers identify the good side and the bad side of the tree to be felled.
- Sawyers cut within their qualification level unless under direction of a higher-qualified sawyer.
- Sawyers establish cutting area control, including the need for road guards, crew spacing, and coordination with resources above and below the cutting area.
- Sawyer and swamper establish work procedures to safely work together within the cutting area and have a mutual understanding of each other's responsibilities, specifically regarding felling operations.
- Sawyers utilize the correct sequence of cuts to construct a functioning hinge.
- Sawyers recognize and adjust the cutting plan as needed based on wood condition and cutting sequence effectiveness.
- Sawyers call out the backcut and direction of fall to alert others.
- After the tree falls, sawyers will reevaluate the canopy for aerial hazards before re-entering the cutting area.
- Sawyers recognize the increased complexity presented by hung trees.
- Sawyers that create hang-ups during felling must reevaluate the situation utilizing a new sizeup, determining if the hung tree should be left if it cannot be easily freed.
- Sawyers complete stump assessments through the course of operations to evaluate and improve performance.

Narrative

Hazardous Tree Risk Refusal Practices

- Every sawyer has the right to stop cutting at any point if they feel their safety is compromised.
- The right to disengage exists at any point in a cutting operation, even mid-operation.
- A sawyer who declines an operation must communicate their decision to their supervisor.
- Supervisors and co-workers are responsible for supporting these decisions.

- When a sawyer disengages, several options can be considered:
 - Leave the tree — flag the hazard area around the tree and attach a note explaining the hazard. Inform supervisors, crewmembers, and adjacent crews of the hazard.
 - Heavy equipment — logging equipment can be used to safely mitigate hazard trees.
 - Explosives — request a blaster to fell a hazardous tree.
 - Pull the tree with a cable — use a truck or portable winch to pull a hazard tree down.
 - For this option, there must be adequate room to operate the winch, and the location must be free of any hazards. Also, the tree needs to be safe enough for personnel to attach the cable.
 - Burn the base — if there is no urgency to fell the tree, building a significant fire at the base can be considered.

Develop a Felling Plan

Elements of a felling plan include:

- Risk analysis based on sizeup (Chapter 4)
- Determination of the best side to complete cuts (Chapter 4)
- Sequence and location of cuts
- Primary and secondary escape paths
- Wedging plan
- Identification of consequences/issues associated with mitigations
- Equipment check (sharp chain, fueled saw, wedges, and an axe or pounder)
- Work Area Control (Chapter 2)

Determining Lean


Many sawyers have been killed or injured because they failed to plumb a tree as part of their sizeup. Understanding lean gives critical insight into the forces influencing felling. Slopes and adjacent trees can give false vertical references that a plumb bob will more accurately assess. A plumb bob is simply a weight, such as a sparkplug or two bar nuts, tied to a string. The amount of lean is expressed as the distance in feet between the plumb line and the center of the bole.

Natural Lean

- Forward lean is when the lean is towards the target.
- Back lean is when the lean is away from the target.
- Side lean is when the lean is laterally away from the target.

Other Factors Influencing Lean

- Limb weight from the location and size of limbs, favoring one side or another.
- Multiple stems or large hardwood canopies.
- Tree sweep, when the bole curves and then straightens further up the tree.

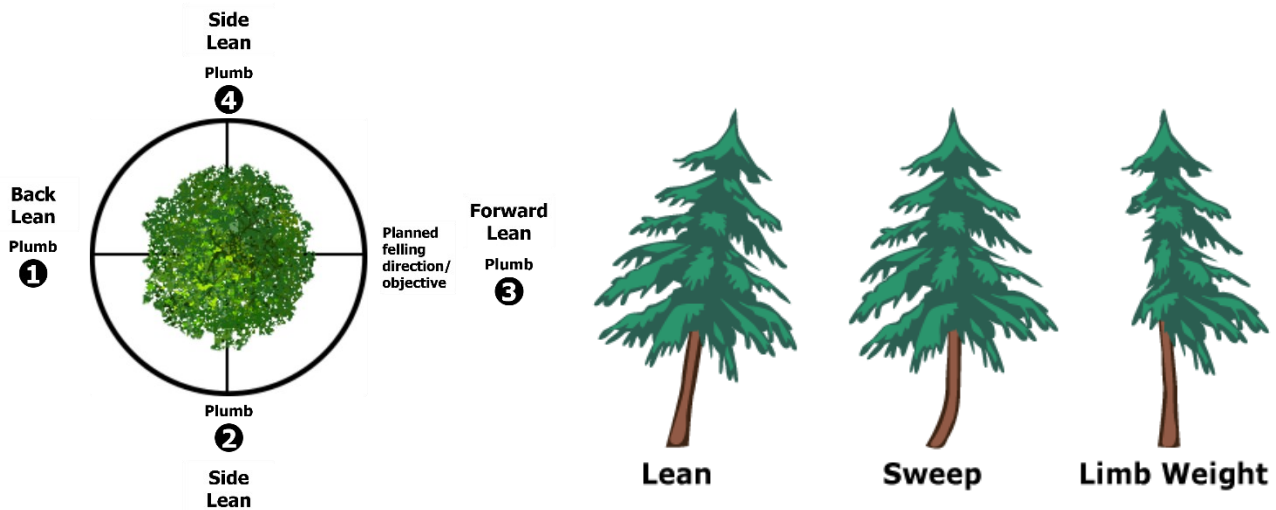

Calculated Lean

Imagine two lines drawn through a circle around a tree. The first line divides the circle in half from the planned undercut through the backcut. (“Undercut” will be used in place of other terms, such as “face cut,” “gunning cut,” “open-faced cut,” and “Humboldt.”) The second line is through the center of the tree and perpendicular to the first.

- Plumbing along the first line will determine side lean.
- Plumbing along the second line will determine forward or back lean. Some leans may not be detected until viewed at a right angle to the lean.

Simple leans can be determined by plumbing one side of each line, but more complex leans may need to be plumbed from all four sides of the tree.

Lean is often expressed as inches or feet away from the hinge of the tree. Ideally, trees should be plumbed from a distance of at least half the tree’s height.

Walk out the Lay

Determine the intended target or lay.

- Look for any obstacles that could cause the tree to bounce back behind the stump or cause the butt to jump or pivot as the tree hits the ground.
- Mitigate any trees or snags that could be thrown back towards any escape paths.

Escape Path and Safety Areas

With the desired felling direction in mind, determine the escape plan by identifying relevant escape paths and safety areas.

- “Before felling is started, the feller shall plan and clear a retreat path. The retreat path shall extend diagonally away from the expected felling line unless the employer demonstrates that such a retreat path poses a greater hazard than an alternate path. Once the backcut has been made, the feller shall immediately move a safe distance away from the tree on the retreat path” [OSHA 1910.266(h)(2)(I)].
- Identify the best side for the final cut to minimize movement from one side to the other.

Safety areas should be close enough for a sawyer to reach quickly once a tree begins to fall. Many accidents and fatalities have involved trees breaking in half or striking another tree that falls back into a planned escape route. For this reason, always keep an eye on the falling tree while traveling the escape paths, and ensure that tripping hazards and debris are cleared from escape paths prior to felling.

Sounding the Tree

Pounding on a tree with the flat side of an axe or pounding tool provides clues to the condition of the internal wood fibers. A hollow “thump” sound indicates rot, which could impact hinge wood, wedging platforms, and the integrity of the bole. Always look up for falling debris after each hit.

Be careful when pounding on snags that have weakened boles, limbs, or hanging branches. Some trees may be too dangerous to pound safely.


Boring

Boring is the best way to verify hinge and wedging platform conditions, particularly when felling standing dead trees or trees with suspected heart rot, which would alter hinge effectiveness in controlling the tree to the ground.

Monitor the chips produced by the chain while boring. Rotten fiber will often appear as darker brown dust, distinctively different from longer wood chips of sound wood.

Bore vertically and perpendicular to the hinge wood to reduce impacts on the hinge and wedging platform. Use caution to avoid compromising the hinge wood.

Continually observe overhead hazards and look up often. Do not weaken the hinge wood by boring into or across any of the hinge wood.

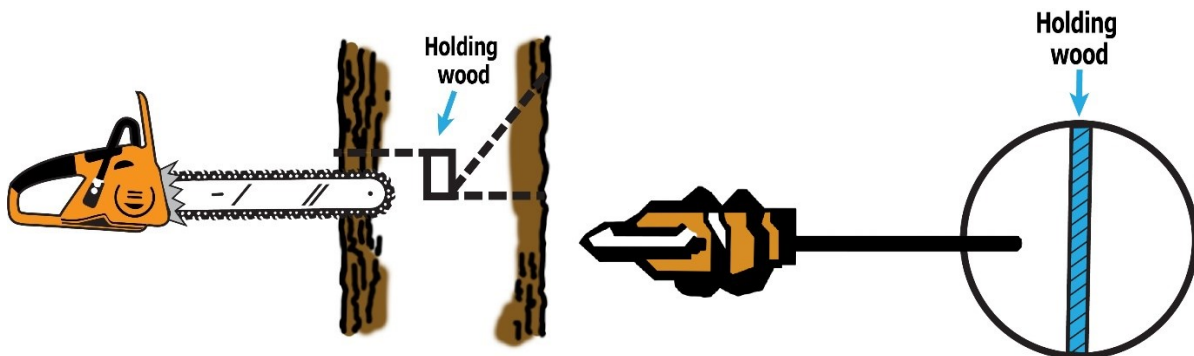

Bark Removal

For trees with bark thicker than four inches, it may be helpful to remove the bark where the planned corners of the undercut will be located. This provides the sawyer with a more accurate placement of the saw for each cut. Removing bark in the planned wedging areas may reduce sawyer exposure once the felling operation begins.

General Felling Operations

Tips for Making Level Cuts

Proper hand placement on the wrap helps prevent the bar from rolling, which can cause a sloped cut.

- Practice a baseline level position by placing a magnetic level perpendicular to the bar.
- Observe how hand movement affects the saw: shifting the left or right-hand on the wrap will cause the saw to roll in that direction.
- Adjust the grip on the wrap until the saw becomes level.
- Check tip height by turning the level parallel to the bar and applying weight to the trigger hand until the bar is level.
- Once the kerf is established, relax the hand on the wrap and allow the saw to do the work.

Types of Undercuts

There are three common undercuts used to fell trees:

- Conventional Undercut
- Humboldt Undercut
- Open-faced Undercuts

Each is comprised of three cuts:

- The first two form the undercut, formerly called the “pie” or “face,” and consist of a horizontal cut and a sloping cut.
- The third is a backcut.

Together, these cuts form a hinge that controls the tree’s direction and fall.

Each cut offers advantages:

- Conventional Undercuts are the most common, as they are simple to execute and work well in most situations.
- Humboldt Undercuts allow the butt of the tree to slide off the stump closer to the ground and minimize breaking; they may also allow for better saw control on steep slopes.
- Open-faced Undercuts maximize felling control with a larger hinge, allowing for more control as the tree falls.

The height of the undercuts should allow the sawyer to frequently look up for overhead hazards and quickly escape from the stump if needed.


- On steep slopes, some cuts may need to be lower on the upslope side to allow for a safer cut on the downslope side.

Check the saw’s fuel prior to starting the undercuts and again before the backcut if needed. Stopping for fuel mid-operation significantly increases exposure.

Conventional Undercut

The conventional face consists of three cuts: horizontal cut, sloping cut, and back cut. A horizontal cut and a sloping cut form the undercut. The backcut, made third, fells the tree.

Cuts needed to fell a tree.

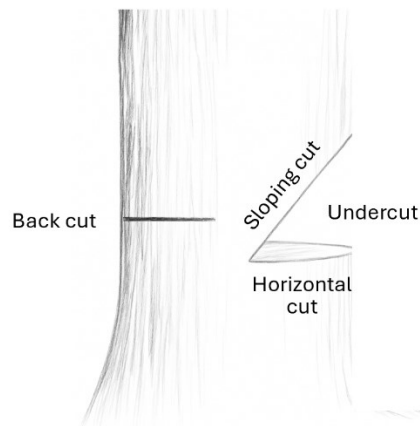

Horizontal Cut

This is also known as the gunning cut.


- Start by facing the desired target and set the saw dogs at the desired corner location of the undercut, then begin the horizontal cut.
- When nearing completion, look down and align the gunning sights with the desired felling direction.
- The horizontal cut should be about one-third of the tree's diameter.
- For stability, it may be helpful to face the target while leaning a shoulder against the tree before beginning the horizontal cut.

Sloping Cut

The sloping cut is the second of the undercut.

- Make the sloping cut at a 45-degree angle to meet the horizontal cut.
- When correcting mismatched cuts, avoid creating an excessively deep undercut.
- Any remaining corner wood can be removed with an axe, rather than enlarging the undercut.
- Both cuts must match before proceeding to the backcut. If these cuts do not match, a bypass is formed.

Bypass example.

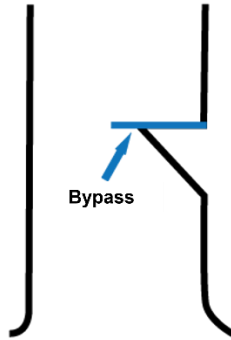

- A bypass cut is a kerf wide cut that makes the direction of the tree's fall harder to predict.
- As the tree begins to fall, the bypass cut may close first, prematurely severing the hinge wood and causing a loss of control over tree as it commits to the face.
- This situation can also cause the tree to barber chair, lifting the log off the stump and placing the sawyer at great risk.

Barber chair tree — OSHA.



- Cleaning up a bypass cut involves an exposure trade-off. When correcting a bypass cut, the undercut only needs to be functional, but does not need to look perfect.
 - Make any corrections and proceed with cutting the tree down.

The sloping cut is at a 45-degree angle.




Backcut

The backcut determines the hinge wood.

- Visualize a rectangle formed between the undercut and backcut.
- The height of the rectangle makes up the stump shot.
- The stump shot helps prevent the tree from coming back towards the sawyer after it falls.
- The width of the rectangle makes the hinge wood, which helps guide the tree as it falls.
- The dimensions of the hinge wood and stump shot are proportional to the tree diameter, but as a general rule two to four inches of hinge wood and at least two inches of stump shot is common.

When setting hinge wood dimensions, remember that the intent of the hinge is for the wood fiber to bend instead of breaking in order to guide the tree as it falls.

A simple rectangle helps illustrate how the backcut defines stump shot height and hinge wood width.

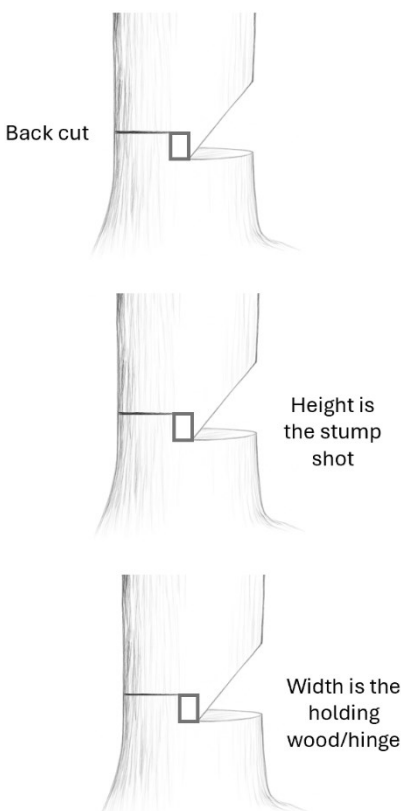

Be sure to utilize the good side of the tree to complete cuts and to designate a primary escape route.


- Once the undercut has been cleaned, recheck the felling direction.
- Shut off the saw and give warning shouts (for example, “Backcut tree coming down!”). Listen for a reply before proceeding with the cut.
- Continually look above for possible hazards and monitor kerf for movement. Line up the gunning site at the completion of the backcut.

Humboldt Undercut

A Humboldt is distinguishable by the undercut below the horizontal cut, which causes the falling tree to slide off the stump at a lower point than a traditional undercut.

- Because the downward-facing sloping cut allows the butt of the tree to contact the ground before the rest of the tree, the entire stump acts as an anti-kickback mechanism.
- This technique offers the sawyer additional protection in some situations, such as uphill felling, steep slopes, or when felling occurs around other stands of trees.
- The Humboldt can be advantageous on steep slopes if the downhill side is too high to safely reach with a traditional undercut.

Humboldt undercut.

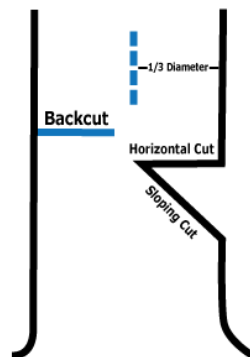


Horizontal Cut

The horizontal cut is similar to the traditional undercut but needs to be high enough to have bar clearance for the sloping cut. It should be one-quarter to one-third of the trunk diameter cut in width, with gunning sites aimed at the target upon completion.

Sloping Cut

- The sloping cut is made at a 45 degree angle below the horizontal cut.
- The corners must meet together; clean up any mismatched cuts to avoid forming a bypass cut.
- An incorrect cut with a notch of less than 45 degrees applies additional force on the hinge wood fibers and could result in a loss of control once the undercut closes.

Undercut less than 45 degrees.

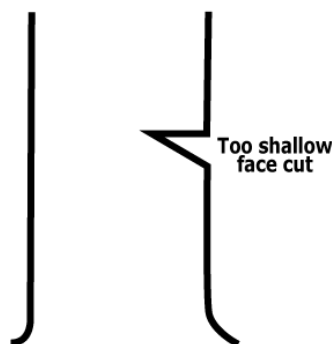

Backcut

- The backcut is similar to the face in that it disconnects almost all of the tree from the stump, leaving a hinge that helps to control the tree's fall.
- A common rule is that the backcut height should be no less than one inch above the horizontal cut.

Open Undercut

- The open-faced undercut is 90 degrees, which allows the tree to fall to nearly horizontal without breaking the hinge, allowing for a greater level of control.
- Other dimensions of the cut are similar to those of traditional and Humboldt undercuts, and the hinge operates on the same principles.

Top Sloping Cut


Begin the cut at a 70-degree angle, stopping at about one-quarter to one-third of the tree's diameter and with the gunning sights aligned with the target.

Bottom sloping cut.



The second cut is made from below at a 20-degree upward angle. This allows the operator to look through the top cut and see when the bar of the saw on the second cut meets the sloping cut. Ideally, this creates a 90-degree cut.

90-degree sloping cut.

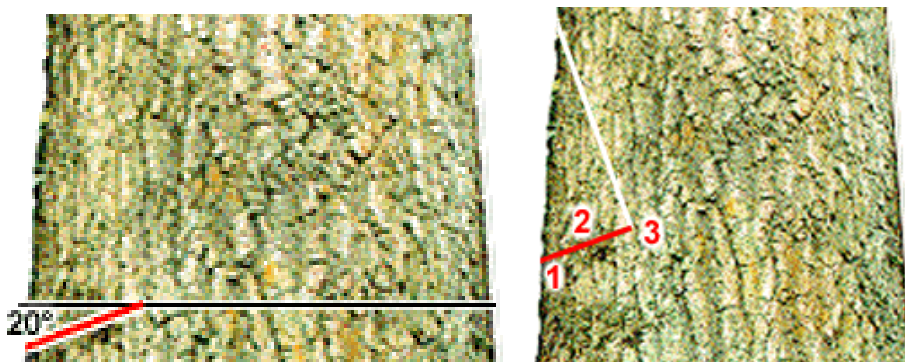

Incorrect Cuts

- An undercut of less than 90 degrees diminishes the advantages of the cut.

Undercuts less than 90 degrees will increase the forces on the tree, which may cause a barber chair.



- Bypass cut

The top and bottom cuts do not meet, resulting in a bypass.



Backcut

Start one to two inches above the corners of the undercut, which creates a stump shot that the falling tree can push against in the event of hinge failure. However, a stump shot that is too high can compromise the hinge and reduce the effectiveness of the undercut.

Where to place a backcut.




Felling Away from the Natural Lean

It is important to determine both the type and amount of lean to develop the cut plan. Factors that influence lean include the location and size of limbs as well as the shape of the canopy.

Types of Lean

There are two types of lean: natural lean and calculated lean.

Natural lean: Natural lean is independent of any objective; it represents the direction a tree would fall if left to gravity alone. It is determined by the combined mass of the bole, limbs, and foliage relative to the center of the tree's base. Weight distributed higher in the tree has more influence on the natural lean than weight lower in the tree.

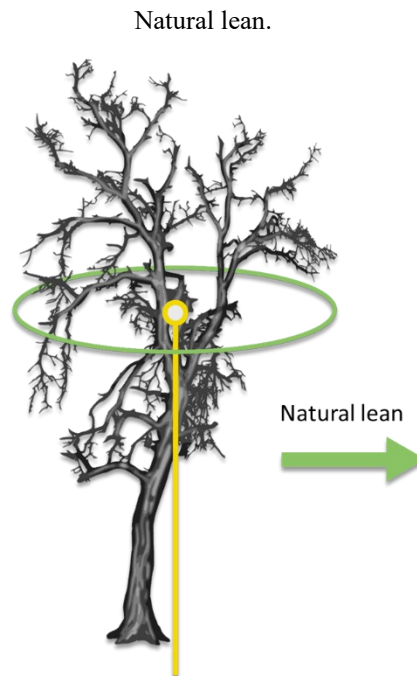


Calculated lean: Calculated lean is the amount of front-to-back and/or side-to-side lean (expressed in feet) relative to the objective. Sawyers use calculated lean to develop the cutting and wedging plans that will place the tree into the objective. It is essential to determine the type of calculated lean before proceeding.

Front-to-back lean is determined by standing on either side of the tree, perpendicular to and opposite the objective (intended lay), ideally a tree length away. If the tree has a back lean, a wedging plan may be required to overcome the lean, or the objective may need to be adjusted.


Side-to-side lean is determined by standing in line with the objective, either in the intended lay or directly opposite. When plumbing the tree, the most precise measurement is obtained from a tree length away, if possible. Sawyers consider the area beneath the side lean of the tree to be the “bad side” — it is where the tree will fall if the hinge is fully severed.

Calculated lean.

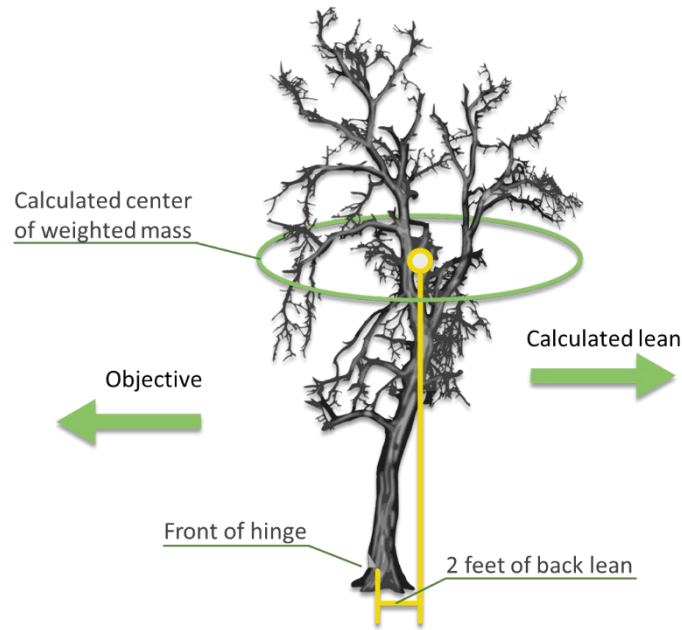

There are many ways to determine the lean. A straight-handled axe, a plumb bob, or hands can be used. The method used will depend on preference and proficiency. To determine the lean of a tree, stand far enough away from the tree so that the entire canopy can be seen.

Plumbing a tree with an axe.

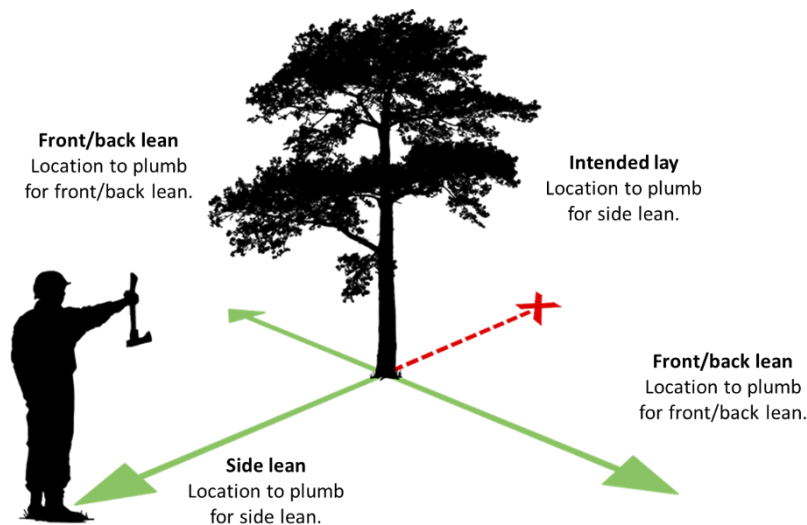

If using a plumb bob, hold the top of the string in line with the center of the top of the tree. Then, locate the spot where the bottom of the line intersects with the ground or bole of the tree. The distance away from the center of the tree is the amount of lean.


If using an axe, hold the axe by the handle with the head pointed down. Grasp the handle as far from the head as practical, allowing the axe to swing side to side. Sight down one side of the handle until aligns with the center of the top of the tree. Then, identify where the handle intersects with the ground or bole of the tree. The distance away from the center of the tree is the amount of lean.

Form a “window” by touching the tips of the index fingers and thumbs of both hands together. Adjust the window until the bulk of the canopy can be viewed through frame of the hands, ensuring it encompasses the tips of every branch. Next, find where the combined mass of the bole, limbs, and foliage is located, then visualize splitting this mass in half by projecting a straight line to the ground. The distance from the center of the tree to the spot on the ground determines the amount of lean.

If using hands and plumb bob combination, use the thumbs to hold the plumb bob to eliminate visual error from the hand method.

Regardless of the method used, with some practice and experience, being able to determine the tree’s lean will soon become second nature.

Plumbing a tree with a plumb bob.

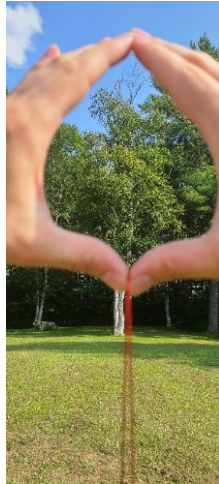

Note: If the lean assessment supports the objective, move on to the escape plan.

The concepts of the good side and the bad side of a tree are directly related to tree lean and sawyer safety.

The bad side of a tree refers to the side under the naturally weighted lean of the tree, where the tree could fall if the hinge breaks or is unintentionally severed. Whenever possible, work from the good side of the tree.

Trees can often be felled off their natural lean by properly adjusting the cutting and wedging plan. The direction of the undercut may vary depending on the amount of lean, and a wedging plan may be necessary depending on the amount of lean involved.


Wedging

Wedges are used to fill the newly created kerf in case the lean is misjudged, the wind causes the tree to set back, or the sawyer intends to fall the tree in a direction that differs from the tree's natural lean.

- Use at least one wedge in every tree to prevent the tree from sitting back.
- The size of the wedge should be appropriate to the tree diameter and depth of the backcut.
- Keep wedges and an axe or pounder accessible while making the backcut.
- Place wedges into the kerf as soon as the chain and bar permit.

- Initially, wedges do not need to be driven in too hard.
 - As the backcut progresses, watch for gaps between the kerf and the wedges and continue to tap as needed. Wedges can also be used as a visual indicator of kerf movement.
 - Wedges need to be parallel to the direction of the intended target.

Top view of wedges.

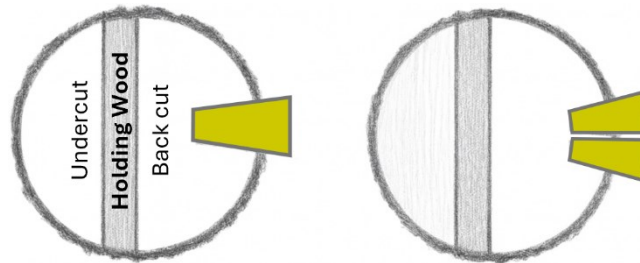

- For trees with a moderate amount of side lean, two wedges may be inserted on the side of the backcut that has been cut first.
- It is essential to tighten the wedges often, especially on trees attempting to sit back.
- Keep wedges and pounders easily accessible to minimize sawyer exposure.

Always look up after each strike on the wedge to check for loose limbs or debris.

Small Tree Wedging

Small trees may limit the use of even small wedges. A quarter-cut technique can be employed, cutting half of the backcut at a time to allow wedges placement without interfering with the guide bar.


- After the undercut, cut half of the backcut using the guide bar's tip from the tree's offside.
- Watch out for kickback, and avoid cutting the hinge wood.
- Finish the backcut from the good side, leaving the appropriate amount of hinge wood.
- After removing the saw, place a small wedge in the kerf at least one inch or more from the remaining wood to be cut.
- Keep the wedge tight, but do not drive it too hard. Finish the backcut using the tip of the guide bar, remaining prepared for kickback from the wedge.

Sit Back

A sit back is a tree that settles back opposite the intended direction of a fall during the backcut.

- A wedge in every tree provides insurance against sit back.
- On a small tree, sit back may be pushed by hand to remove the saw and insert a wedge.
- On larger trees, sit back is more hazardous and may require a second undercut in the opposite direction or the use of other cutting options.

Sit back causing pinched guide bar and chain.

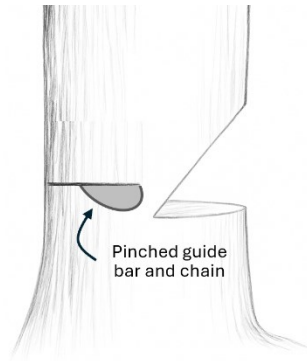

After felling trees, flush cut the stumps as close to the ground as possible without contacting the soil with the chain. Low-cut stumps are less noticeable and present fewer hazards to others.

Felling Observers and Spotters

The use of personnel other than swampers in felling operations varies between agencies.

Many accidents and fatalities have involved extra personnel in the work area. However, some organizations allow sawyers and swampers to work in teams for additional situational awareness, which can also reduce the time the sawyer is working at the stump.

Kerf and Slash Cuts

For trees smaller than five inches in diameter, an undercut may not be necessary.

- Kerf Cut — a single horizontal cut one-third the diameter of the tree, used in place of a traditional undercut, followed by a backcut. The proportions of the kerf cut, hinge wood, and backcut remain the same as a traditional undercut.
- Slash Cut — a single cut with approximately 30 degrees of slope. The dimensions are similar to a traditional backcut, with the remaining wood functioning as hinge wood. There is no undercut or kerf cut used. Slash cuts can also be cut completely through the tree, allowing it to fall towards the low side of the cut.

Chapter 8 — Tree Anatomy and Defects Contributing to Failure

Understanding basic tree anatomy, tree defects, and how decay impacts tree stability can improve tree sizeup skills and determine operational complexity. Sizing up tree defects that contribute to tree failure is not always straightforward and varies by tree species. While dead trees often exhibit the most obvious structural defects, live trees may also have structural defects that are not easily detected by the untrained eye.

Tree Anatomy

Standards

- Sawyers identify stand conditions and discuss their impacts on sizeup and complexity to adjacent forces.
- Sawyers recognize tree anatomy and defects and their relationship to the cutting operation sizeup and complexity determination.
- Sawyers recognize the additional risks that can be associated with standing dead trees and determine the condition of the snag during sizeup.

Narrative

Hardwoods and Softwoods

Tree species are grouped by angiosperms and gymnosperms.

Angiosperms are typically flowering, broadleaved trees. Most are deciduous and considered hardwoods. Hardwoods typically are slow-growing with dense and less flexible fibers.

Gymnosperms are typically cone-producing, needle-bearing conifers. They are mainly evergreen trees (with a few exceptions) and are considered softwoods. Relative to hardwoods, softwoods grow much faster with softer and more flexible fibers.

For the purposes of hazard tree identification, hardwoods and softwoods can be broken down into four major groups:

- **Resinous Tree Species** — Douglas-fir, larch, pine, and spruce. These trees are generally longer-lived and less prone to decay. They have more structural stability, even with severe defects. When wounded, the resin response covers the wound and can protect the tree from decay fungi entering the wound. Generally, larch, western white pine, and larger Douglas-fir snags can stand for decades.
- **Decay-Resistant Species** — cedar, juniper, and redwood. Hinge wood for live cedars and junipers is typically more brittle, which can affect directional felling control. Only a few specialized fungi are capable of causing severe decay in the heartwood. However, when present, decay can be severe (e.g., western red cedar). Often, dead tops in these species are solid and can persist for decades.
- **Non-Resinous Conifers** — hemlock and true firs. Wounds are easily colonized by decay fungi. Dead tops in these species rapidly decay and fail. These species are short-lived snags due to decay.


- Deciduous Trees — aspen, oak, maple, alder, and cottonwood. Cottonwood, aspen, and alder are generally short-lived and prone to decay. Maple, oak, and several other deciduous tree species groups are long-lived, and many are less prone to decay.

Sapwood and Heartwood

Trees are comprised of both sapwood and heartwood.

- Sapwood consists of the outer layers of a tree stem, which in a live tree are composed of living cells called xylem that conduct water up the tree. Living sapwood can isolate areas of decay fungi to prevent spread. Sapwood of dead trees generally decays quickly.
- Heartwood is the inner, non-living part of a tree stem that is altered into a protective state as cells die in the normal growth process. Heartwood provides much of the tree's structural support. Fungi can decay heartwood if given a mode of entry into a tree. Generally, heartwood decays are more common in older trees and can take years to degrade before impacting the structural integrity of the tree.


Heartwood vs. sapwood.

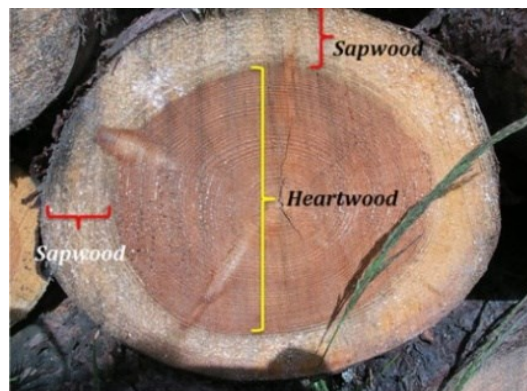

Other Tree Anatomy Terms

- The outer bark is the tree's protective layer, shielding it from environmental damage, pests, and disease.
- The inner bark is the tree's nutrient transport system, carrying sugars and other essential compounds from the leaves down to the roots.
- The cambium is a thin, living layer of actively dividing cells between the bark and sapwood, responsible for the tree's growth in diameter and contributing to the tree's strength and resilience. The cambium continuously produces new sapwood on the inside and inner bark on the outside, creating the easily observable tree rings with each passing year.

Cross-section of a tree showing the cambium and surrounding layers.

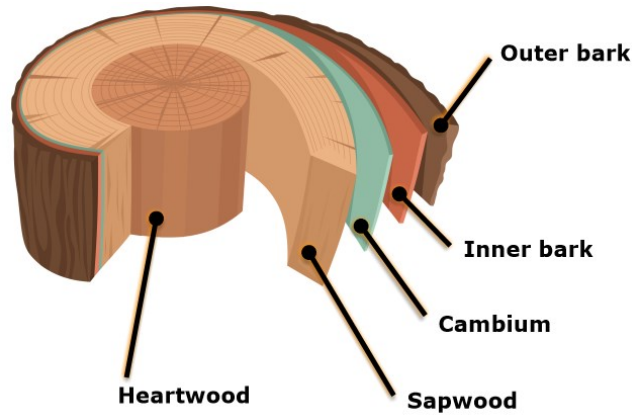

Decay Types

Specialized fungi are capable of decaying heartwood and sapwood. Since sapwood is living tissue, very few fungi can colonize the sapwood and cause decay. However, upon tree death, sapwood is easily colonized and decays quickly. Heartwood is more easily decayed in living trees by specialized fungi. In general, living trees tend to decay slowly from the inside out because decay is isolated to the heartwood, whereas dead trees decay from the outside inward.

Physical Damage

Physical damage can occur from mechanical damage, fire, lightning, snow loading, etc. Damages to trees that remove the bark can create an entry point for decay fungi. The likelihood of being infected after wounding depends on the species and whether or not the tree is resinous.

Biological Damage

Biological damage is typically caused by disease or fungi, followed by decay and structural instability. Some biological damage may be induced through physical damage and can depend on tree species, stand structure, and age. Biological defects tend to be clumped across geographic locations by species and age.

Root Damage

Root damage that causes tree instability can be attributed to both physical and biological damage. Physical or environmental factors include broken roots, fire, erosion, fluctuating groundwater tables, exposure to the elements, and human/animal impacts. Roots damaged by physical problems typically become subject to decay. Biological damages are typically caused by disease or fungi, which can lead to root decay. Root problems can be difficult to assess, but there are clues to help identify hidden dangers.

Root Instability Causes

- Root disease
- Undermined/severed roots
- Waterlogged sites
- Root-sprung trees (the tree has shifted, causing the root system to lift) or severely leaning trees
- Fire

As a general rule, tree stability requires the preservation of at least 50% of a tree's root structure within the dripline of the canopy.

Tension and Compression Roots

Roots that are growing uphill from a tree are under tension. Roots growing downhill from a tree are under compression. Tension roots pull the tree up, while compression roots push it up. On a tree with a lean, the roots against the lean are under tension, while those towards the lean are under compression.

- Root damage to compression roots is generally not as serious as damage to tension roots.
- Avoid working downhill or under the lean of a tree where the tension roots have been compromised.

Roots under tension are approximately twice as strong as roots growing under compression, making the location of root defects crucial to trees growing on a slope.

Root Evaluation

It is important to look around the base of a tree for compromised roots. Pay attention to trees that have developed a recent lean. Examine the tree for any recent uplifting of the root plate by looking for cracking in the soil, which would indicate recent movement and a tree in the process of failing. These are often evident after windy conditions, especially when soils are saturated.

Root diseases are more difficult to identify. Root diseases are caused by specialized fungi and can be difficult to detect on an individual tree. Instead, the pattern of mortality and tree decline in the stand is a key diagnostic feature that root diseases are present.

- If the trees in the surrounding area are dead, have fallen over at the base and lack any root ball, have mushrooms or conks at the root collar, or show other signs of stress and decay, root problems may be the cause.
- Some trees with root disease may have resin/sap flow at the base. Green trees may exhibit signs of root damage through chlorosis (yellowing of needles), thinning of foliage, or overabundance of cone production. If root disease is suspected, all trees in that area should be considered potentially compromised. The importance of different root diseases varies by geographic location and the conifer tree species affected. Consulting local field guides is recommended for accurate identification.

Tree Damage Identifiers

Butt and Bole Defects

The outer and inner bark of a tree act as a protective layer that inhibits decay fungi from entering. If a tree is healthy with intact bark, fungi are typically unable to penetrate directly into the tree, making internal rot unlikely. Damage to a tree that kills or removes the bark and cambium creates openings for fungi to exploit.

Indicators to examine the butt and bole of trees for decay:

- Missing or loose bark.
- Open wounds that are caused by logging activity, fire, rolling rocks, human activities, or being struck by another falling tree.
- Cracks or splits along the bole of the tree, especially those with exposed wood and evidence of decay behind the crack.

- Broken tops.
- Lightning damage with missing bark or wood down the length of the tree or a spiral scar. Look for longitudinal cracks into the wood and/or old scars where decay has developed.
- Fire damage where part of the bole is consumed.
- Insect or animal damage.

Stem and Butt Decays

Two broad types of decay are heartwood decay and sapwood decay. Few fungi can infect and decay living sapwood, but once dead, sapwood decays more quickly than heartwood.

Fungal fruiting bodies (conks or mushrooms) sometimes appear on the butt or bole of trees, indicating the presence of rot. Conks and mushrooms come in many shapes, sizes, and colors. Some are hard and woody, while others are soft to the touch. Conks can be an important visual indicator of internal decay and may indicate reduced structural integrity. In general, the presence and location of conks indicate tree sizeups should include assessments for internal decay.

Heartwood decay on aspen.



Conk.



Superficial sap rot on a recently killed ponderosa pine.



Cankers/Swelling

A canker is an area of dead bark or cambium on a tree that slowly expands outward through time. Fungi that cause cankers often enter through wounds or openings in the bark, such as branch stubs. Canker fungi kill the cambium just beneath the bark, allowing for decay fungi to penetrate the deeper underlying wood. Cankers are typically localized, appear as missing or sunken areas of the bark, and often appear discolored and weep sap. Portions of the trunk may also appear swollen. As the healthy portion of the tree continues to grow, the bark around the canker can deform and split.

Western gall rust canker



Rust canker, also known as hip canker, on a lodgepole pine



Stems or branches often fracture near cankers due to decay or deformed growth. Trees with cankers should be evaluated for associated internal wood decay, cracks, or other defects. Hypoxylon cankers in white trees contribute to tree mortality and compromise the structural integrity of the tree.

- If the bark is intact and tight, there is likely no decay.
- If the bark is loose or split, the wood underneath may be weak or decaying.
- If a tap of an axe sounds hollow, then decay is present.
- Cankers on pine species are often solid without decay. However, they can have severely deformed growth that often leads to failure under high winds or snow and ice storms.

Cankers that encompass more than half the circumference of the tree may cause the tree to fail, even if the exposed wood appears sound.

Wounds

Wounds that break the bark or branches can be entry points for decay fungi. Decay after wounding is a slow process, often taking several years to decades before increasing the probability of failure. A damaged stem can signify internal decay. Be aware of old wounds where the tree has grown over the damaged area, which may cover internal decay. The development of decay varies between tree species.

Cracks and Splits

Cracks may be caused by lightning, wind shear, freezing temperatures, heartwood decay, and other natural causes. The wood behind cracks may be sound, decayed, or missing if decay is severe. Resinous tree species with recent cracks often have fresh pitch associated with them or exposed fresh wood. On dead trees, wood dries and cracks. Lightning strikes are typically evident by a spiral crack extending down the stem. Trees with cracks should be suspected of internal decay. In severe cases, cracks indicate a tree is in the process of failing.

Examples of cracks that are vertical on the tree stem, separating the stem into two halves along the wood grain, which can have a high likelihood of failure.



Tree Top Defects

Identifying tree top defects can be difficult from the vantage point of the tree base, making it a good practice to inspect trees on the approach from a distance. Visually inspect the tops of trees in the area as part of the initial site assessment.

Dead Tops

Dead tops, sometimes referred to as spike tops, can occur in trees of any age or species but are more prevalent in older, decadent stands. Broken treetops expose the internal wood fibers to the elements. As the wood fibers decay, they soften and absorb moisture, making stems heavy and susceptible to breaking. Before failure, tops often rot in place and are held by little or no sound wood.

A gentle bumping or jarring of a top-killed tree may cause top failure, calling for extreme caution when working near them.

Examples of dead tops.



If dead tops are identified, be aware that other trees in the area may also have dead tops but have grown new or multiple tops, making it more difficult to identify the hazard.

Dead tops in pines, incense-cedar, western red cedar, juniper, and Douglas-fir that give evidence of long-term persistence are usually dry or resin-impregnated and generally hold for long periods of time.

Species such as true firs, spruce, hemlock, and hardwoods are prone to decay, fail more rapidly, and may absorb moisture, adding additional weight and leading to high failure rates. Look for evidence of advanced decay in dead tops, such as cavity-nesting birds.

Multiple Tops or Codominant Stems

Multiple tops form when two or more lateral branches take over as a new leader to replace an old, broken, or dead leader. Multiple tops and codominant stems are often weaker than a single-stemmed top for a variety of reasons. In V-shaped unions, bark often forms a natural collecting point for snow, moisture, and organic matter, which promotes decay. Look for evidence of cracking, pitching, or decay below the fork to indicate that the forks are separating.

When cutting a tree with a dead top, it is important to recognize that the movement of the tree towards its intended target may cause the weakened top to break and come back towards the sawyer.

Forked tops with high failure potential.


Weeping/cracked hardwood.



Cedar with open cracks.



Ponderosa pine with embedded bark.

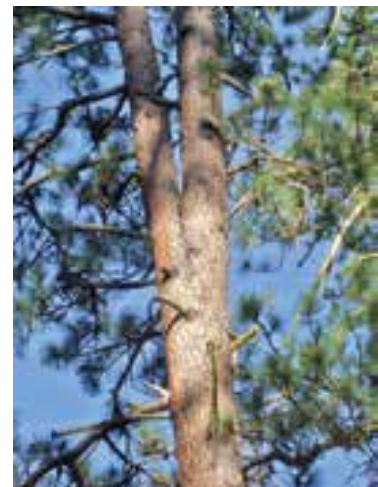

Branch and Limb Defects

Examine each tree in the working area for dead, dying, and damaged branches; even a small limb can be deadly. Living branches may also be weak or pose hidden dangers that are not readily visible. Wind, rain, snow, and ice loading can also contribute to limb failure.

Decay

Trees with conks, cracks, openings, weak branch unions, broken/hollow branch stubs, and missing bark all need to be examined closely for evidence of decay.

Dead Branches

Trees shed both dead and live branches naturally, but may remain intact for many years. Visually follow the branch from the bole of the tree to the end of the limb. Dead branches are common but may be difficult to see in a live canopy. Side branches coming off the main branch or at the end of the branch may also be dead and susceptible to failure.

Dwarf Mistletoe Brooms

Dwarf mistletoe is a parasitic flowering plant that causes a tree to produce heavy masses of dense branches and foliage and is typically found on conifers. These are commonly referred to as witches' brooms and can get quite large and heavy in some tree conifer species. In general, small brooms do not present a hazard.

Large brooms may change the weight distribution of the tree, and large dead brooms are prone to breakage under snow and ice loads, especially large brooms in a Douglas-fir.

Hardwood trees tend to have more branch failures
than conifer/softwood trees.



Large broom.



Whole Tree Defects (Dead Trees or Snags)

Many factors can influence when a snag fails, including tree species and pre-existing defects. Tree species decay at different rates. For example, small dead trees contain a higher sapwood ratio and are likely to fail soon after tree death. Larger conifers have higher heartwood ratios and typically fall in pieces from the top down over time.

- Trees such as the large Douglas-fir, western white pine, western larch, ponderosa pine, and cedar can be slow to break down and remain standing for years.
- Cedars and junipers generally decay very slowly.
- Hardwoods, including cottonwoods and aspen with large spreading crowns, will have individual branch failures soon after death.

- Cottonwoods, alders, true fir species, and hemlocks quickly decay and are short-lived snags.
- Lodgepole pine has been found to rapidly fail at the base of the tree instead of slowly breaking down further up the stem. Typically, half are on the ground within nine years.

Dead Leaning Trees

Arched trees or those with a heavy lean have a greater likelihood of failure. The direction of a tree's lean indicates its most likely direction to fall and poses a highly significant danger to anything within its target area.

Live Leaning Trees

Live leaning trees may offer visual clues about their stability.

The most important feature to assess is whether a tree has a recent or old corrected lean. A tree that has been leaning for a long time will often try to self-correct by sweeping the tree's top upward to re-establish its vertical growth pattern.

For trees with new leans that have not self-corrected, examine the base of the tree and look for signs of an uplifting root plate and separating forest litter, duff, or uplifted soil on the side opposite the lean, which indicates recent movement.

These trees are actively failing; therefore, extra caution should be taken. Leaning or arched trees with no danger indicators may be perfectly safe to work around.

Determining whether a lean is recent or longstanding can be difficult in older trees or trees with broken tops, and other indicators may be needed to assess tree stability. Leaning trees with other defects, such as decay on the tension side or undermined roots (e.g., trees above a road or cut bank), should be carefully evaluated.

Cracks in the soil around leaning trees indicate that such trees have a high failure probability.



Old leans with righted or corrected tops have a low failure probability.



Multiple Defects: Independent and Compounding Tree Defects

When trees have multiple defects, determine whether the defects are independent of each other or are interconnected, as interconnected defects may potentially compound one another.


Independent defects do not affect each other; the risk of tree failure is generally equal to that of the most serious single defect.

Compounding defects are when multiple defects work in synergy, making the likelihood of tree failure greater than that of the tree's most serious single defect. Compounding defects requires extra scrutiny and a higher level of caution.

A common example of a tree with multiple compounding defects is a leaning tree with basal decay or root rot. The leaning tree with basal decay or root rot is much more likely to fail than a comparable tree that is either not leaning or does not have root rot or butt decay.

The defects must be evaluated together with increased emphasis on how they interact and increase the risk of stem failure.

Examples of structural defects that can independently or collectively increase tree failure.

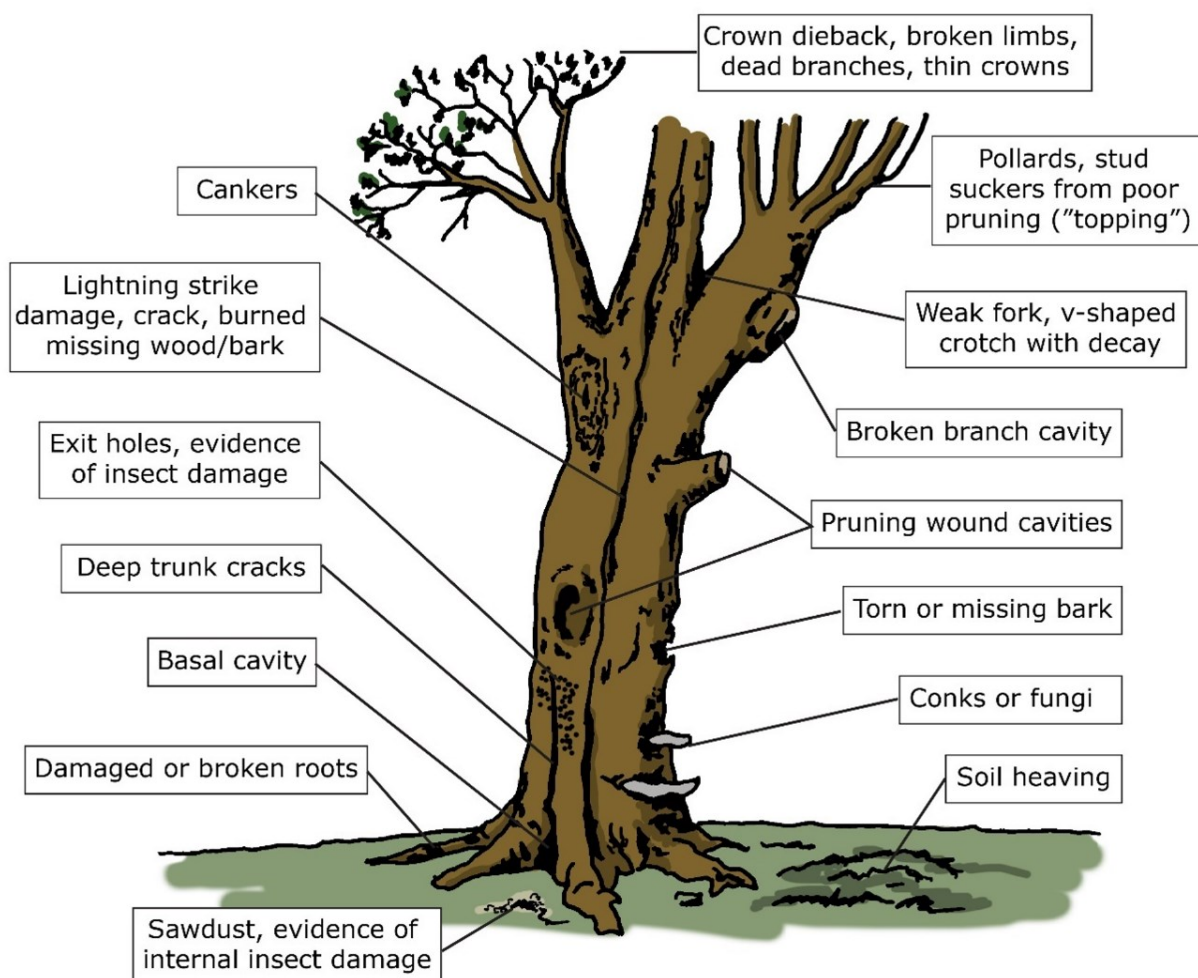

Insect-Caused Damage

- Consult local experts for specific regional insects and their effects on forest health.
- Bark beetles commonly cause individual and stand-level mortality when populations are high. Most conifer species have a bark beetle associate. The Douglas-fir beetle is common in Douglas-firs. The fir engraver is common in the true fir species. The spruce beetle is common in Engelmann spruce. The mountain pine beetle is common in all pine species. The western pine beetle is common in ponderosa pine — the pine engraver often kills small ponderosa pines or the tops of ponderosa.
- Some species of bark beetles frequently attack trees stressed from root disease, defoliation, or drought, such as fir engraver beetles in grand and white fir or Douglas-fir beetles in root disease pockets. The symptoms of bark beetle attack are boring dust, pitch streams, galleries under the bark, fading or red crowns, dead tops, or group mortality. In contrast to root disease centers, bark beetle mortality often occurs over a brief period, and trees appear to have died concurrently.
- Wood borers typically infest trees after bark beetles, though there are a few exceptions.
- Bark beetles and wood borers introduce sap rot fungi when they attack the tree, starting the decay process. The emerald ash borer has become a significant concern in the Eastern Region of the United States. It first causes structural damage in the treetops, reducing their integrity, and later affects the main stem. Although wood fiber may look healthy, they are structurally compromised.
- Carpenter ants and termites can severely weaken trees that are already decayed.
- Defoliating insects, such as the western spruce budworm and the Douglas-fir tussock moth, can kill tops or entire trees.

Changing Forest Conditions

Drought and insect infestations are dramatically changing the forest landscape. Fire seasons now last several months longer than they did a few decades ago, leaving forests severely damaged and weakened. Hurricanes, tornadoes, and derechos (extremely strong, straight line wind events common in the Midwest) can create numerous tree hazards. Conditions and dangers will vary by location, aspects, and within individual stands. Fire-damaged trees will be covered in Chapter 9.

“Remember that a green tree is not always safe, and a dead tree is not always in danger of imminent failure.” - Randy Anderson

For a list of local and regional-specific information, visit <https://www.nwcg.gov/committees/hazard-tree-and-tree-felling-subcommittee>.

Chapter 9 — Advanced Felling

Advanced felling requires the mastery and practice of basic techniques by experienced sawyers applied to more complex and diverse situations.

All sawyers will determine whether a tree needs to be felled or if there are other options, such as moving the fireline, using equipment, or creating no-work zones.

Advanced Felling

Standards

- Sawyers recognize situations that increase complexity and require an advanced felling skill set.
- Sawyers understand regional variances will affect the procedural sizeup and complexity in every cutting operation.
- Sawyers have all necessary equipment for the felling operation, including a chainsaw with a properly sized bar and sharp chain, a reliable powerhead, sufficient fuel and oil, a felling axe or wedge-driving tool, and wedges of the appropriate size, type, and quantity.
- Sawyers evaluate the cutting plan to ensure the knowledge, skills, and qualification levels are appropriate for implementation.
- Sawyers utilize accepted cutting techniques to meet the cutting plan.
- Sawyers recognize complexity changes during felling operations, constant awareness, and reevaluation of escape paths and safety areas must occur.

Narrative

The above standards are supported throughout the following six topics.

Large Diameter Tree Felling

Standards

- Sawyers understand the importance of lining up cuts when operating on larger diameter trees.

Narrative

If the tree diameter is too large for the saw bar to make an undercut from one side, sawyers will need to operate on each side of the tree.

The specific mechanics of double cuts are essentially the same as traditional undercuts, but they present additional challenges:

- Matching cuts from side to side.
- Making a clean undercut without a bypass or severing the hinge wood.
- Setting a uniform amount of hinge wood.
- Making cuts with straight and uniform planes. Larger cuts often drift due to the sawyer adversely applying pressure through the saw or by using improperly filed chain cutters.
- Correct dimensions with boles that are not evenly round.
- Leaving a “post” in the backcut — a column of hinge wood preventing the tree from falling.

When developing the cutting plan, minimize walking from side to side to reduce exposure, and finish the backcut from the best side of the tree.



Double Cut Process (Same for All Types of Undercuts)

- 1) **Trim Bark** — Remove thick bark greater than four inches, which will allow the sawyer to obtain an accurate view when matching the horizontal and sloping cuts. Removing bark around the backcut will provide an opportunity to visually inspect the wood, allow wedges to be driven further into the kerf, and provide a solid wedging platform. This also makes observing kerf movement easier as the tree begins to fall.
- 2) **Mark Corners** — Marking the corners of the undercut will help match the horizontal and sloping cuts and prevent bypass cuts.
 - a) One method for marking corners is to have the swamper hold one end of a piece of p-cord between the intended lay target and the first corner, positioned approximately one-third of the tree diameter and at the height of the intended horizontal cut.
 - b) While still holding the opposite end of the cord in place, mark the opposite side of the tree at the same height.
 - c) With practice, this method helps ensure the undercut is accurately square to the lay and minimizes misaligned cuts.

Mark corners.



- 3) **Mark Backcut** — A small horizontal cut at the desired height of the backcut will help visualize the proper bar height before committing to the backcut.

- 4) First Side Undercut — From the marked corner, start the horizontal and sloping cuts from one side. Use the gunning sights and stop at the set corner mark.
- a) Optional step — Before continuing to the offside undercut, it may be helpful to remove a section of the undercut to provide a visual reference while finishing the offside cuts. While facing the undercut, bore in to remove most of the section that has been cut so far. Be sure to leave at least four inches of kerf to use as a guide for the offside cuts.

Remove a section of the undercut.



- b) Knock out the undercut with a sharp blow to the center of the undercut using the flat side of a felling axe or pounder. Larger undercuts may require several bore cuts and a wedge in the kerf to split and break loose.

Knock out the undercut.



- 5) Offside Undercut — Reinsert the bar into the existing kerf and continue cutting until the offside corner mark is reached. Repeat the process with the second cut until both cuts meet. Check the gunning sights to ensure the undercuts match and correct any mismatched cuts.

Reinserting the bar to complete the offside undercut.




- 6) Backcut — Ensure the fuel tank is full. Place wedges and felling tools in an easily accessible location.
- 7) Double-check that the work area is clear and give warning shouts with the saw shut off.

The most common error when starting the backcut is poor alignment and drifting cuts caused by inadvertently torquing on the saw, which changes the angle of the cut.


Common Backcut Patterns

Backcut on the Offset Side


- To line up the backcut, stand next to the tree facing the target at 90 degrees. Hold the saw level at the desired stump shot height, set the dogs approximately three to five inches behind the desired hinge, and begin cutting. Stop cutting once the hinge wood is set.

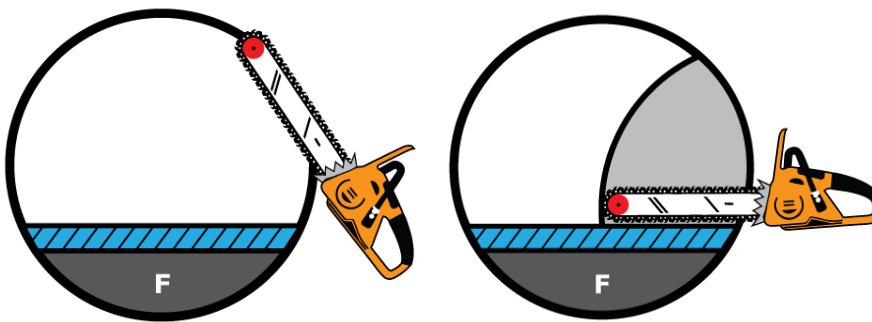


- Reset the dogs five to six inches towards the back of the tree and cut to the hinge wood. Be careful not to cut any hinge wood. Insert a wedge once there is room.

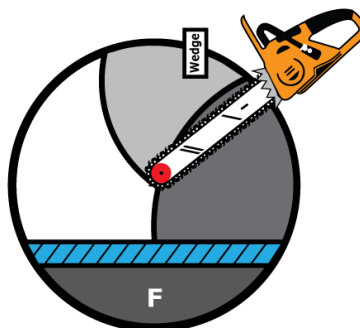

- When there is enough clearance to complete the cut from the good side, flip the saw and continue cutting. Insert another wedge when possible.

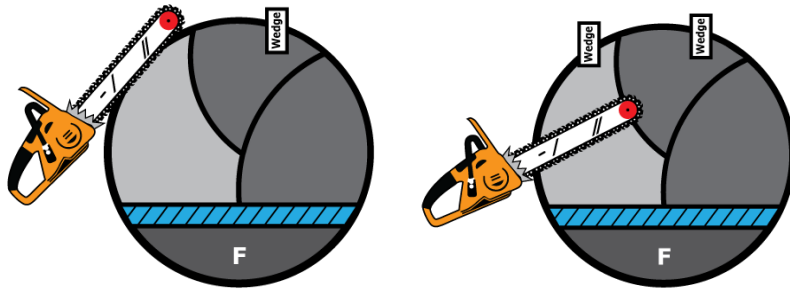


- Continue to cut until the desired hinge wood is set, and watch the kerf for tree movement.

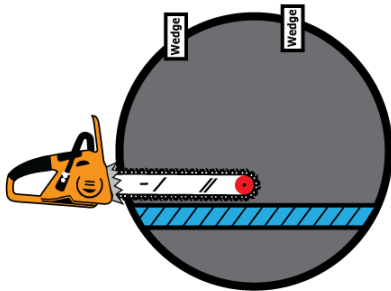

Cutting the Offside Hinge Wood with a Tip

- With the chain stopped, set the tip at the hinge wood width on the offside.
- Begin cutting with the saw perpendicular to the undercut.
- Cut back until the dogs are set and continue the cut, pivoting on the dogs. Set a wedge when possible.
- Continue cutting and resetting the dogs around the tree and finishing on the good side.

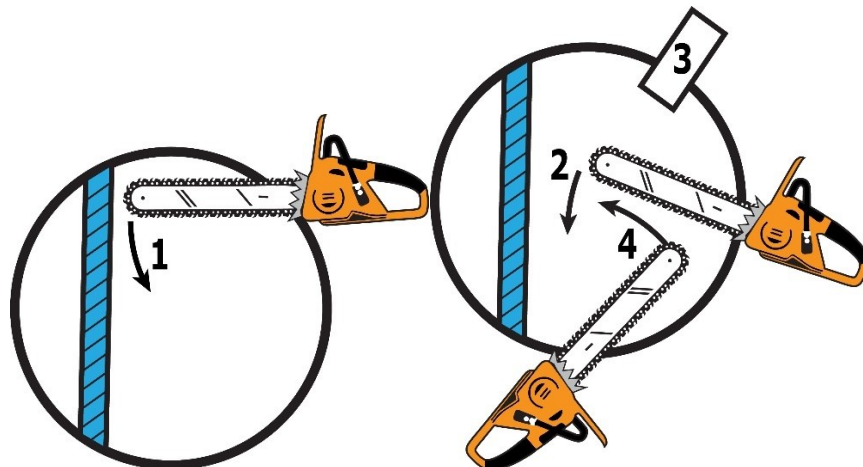

Dogging to the Offside

This method provides a uniform shelf around the backcut perimeter, which can then be used to complete the cut.

- Set the dogs at the hinge wood of the good side and begin cutting just to the width of the bar.
- Reposition the saw toward the end of that cut, set the dogs, and cut again to the width of the bar.
- Continue this pattern until the bar can cut to the hinge wood on the offside.
- Pivot the cut from the dogs and continue cutting. Take care not to cut the hinge wood. Continue cutting the interior wood and repositioning the back wood until the hinge wood on the good side is reached. Place wedges as appropriate.

Boring Heartwood

Boring heartwood may minimize the amount of pounding and wedging needed to fell a tree against its lean. It is considered an intermediate to advanced technique, which requires strong boring skills and a clear understanding of its advantages and disadvantages before consideration.

Do not attempt this cut on a tree with compromised hinge wood.

Advantages

- On green trees, boring heartwood can be beneficial in sections where fibers are strong and flexible.
- It may reduce the exposure to wedging and pounding on dead and fire-weakened trees, where wood fibers are brittle, many branches are weak, and tops are often dead or weak.
- It can initiate felling in the intended direction more quickly, as there are fewer fibers to break, reducing the risk of the tree getting hung-up on adjacent limbs.


Disadvantages

- Boring heartwood may compromise directional felling if the integrity of hinge wood is compromised by rot or fire damage. A thorough procedural sizeup should include inspection of the hinge wood after the undercut before proceeding to a bore cut.
- It should not be used to fell more than 15 degrees off lean for dead trees. Green trees with flexible wood fiber may be felled further off lean.


Method

- Using the horizontal cut of the undercut as a guide, bore into the center of the tree and remove interior wood that is out of reach from the sides. Take care to minimize cutting hinge wood and maintain equal amounts of hinge wood on each side. This method increases exposure to the target area and is not advised for trees with compromised hinge wood.
 - Another option is to bore in from the back side of the tree. This option increases exposure to barber chair, so it is not advised for trees with heavy lean.
- Bore the saw into the offside and cut to the hinge wood.
- Cut back towards the rear of the tree, repositioning while working towards the good side.
- Continue to the good side and complete the cut until the hinge wood is reached.

Felling a tree with the boring method.

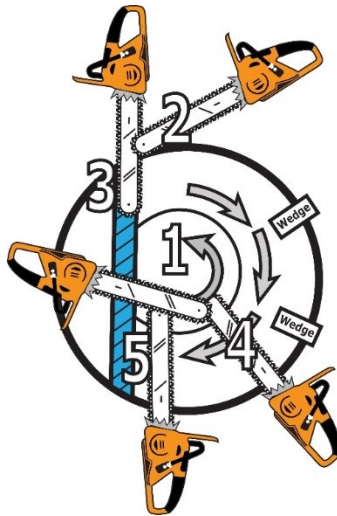

Boring heartwood from behind the tree.

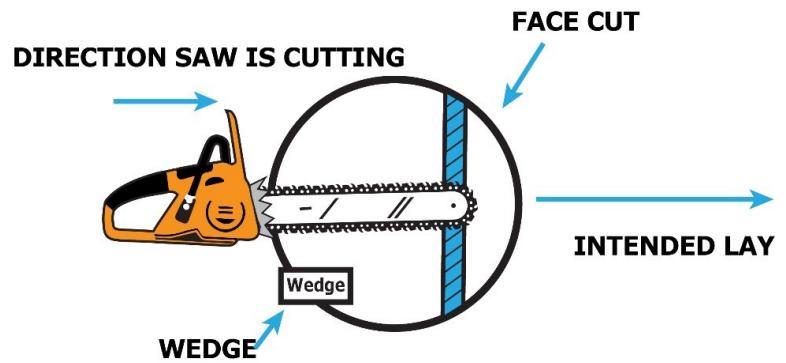

Large Tree Wedging

Placing a wedge in every tree provides insurance against wind or a misjudged lean. Set wedges as soon as there is adequate clearance room in the backcut to prevent the saw from striking the wedge and stopping the tree from sitting back. Periodically drive wedges in as the cut progresses. Wedges aligned towards the target will offer maximum lift.

Use multiple wedges placed side-by-side to distribute the weight across a greater area. Work the wedges together by striking one at a time, slowly working the wedge combination into the kerf at the same rate to achieve maximum lift.

Stacking wedges will increase the amount of lift. Rifled wedges can be used, or smooth wedges can be crossed at roughly 90 degrees to each other. Placing dirt or woodchips between the wedges will help to prevent them from popping out at high velocity.

Too large a hinge or stump shot can result in unnecessary wedging and increased exposure. Utilize 10 percent of the tree's diameter at breast height (DBH) as a guide to determining maximum hinge thickness and alter to suit conditions.

Leaner Trees

Standards

- Sawyers must identify tree lean in feet/inches to ensure it is within acceptable limits and that the wedging operation will successfully fell the tree.


Narrative

Quarter-Cut

The quarter-cut technique can be used to create space to allow wedge placement when working with trees that have side or back leans.

- Cut 1 — Undercut towards the target.
- Cut 2 — From the offside, cut half of the backcut and drive the wedge as soon as possible.

- Cut 3 — From the good side, finish the backcut, driving another wedge as conditions allow.

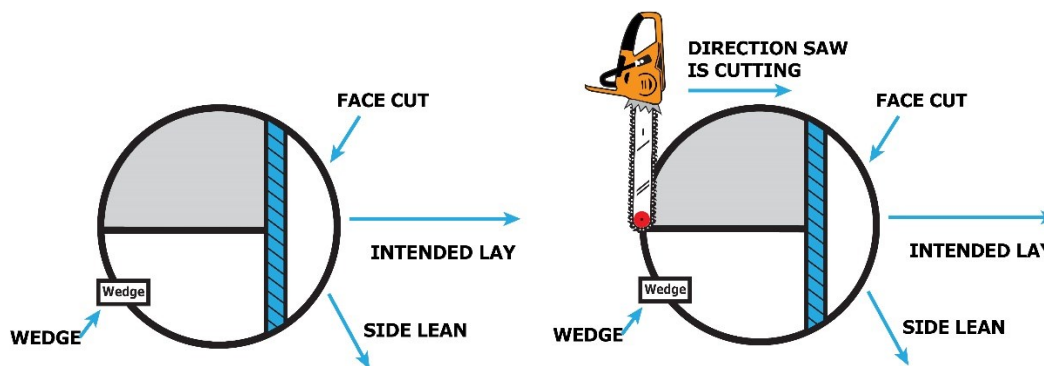


Boring Backcut

Trees with a heavy forward lean are susceptible to barber chair because of the high amount of tension in the wood fibers running along the bole on the opposite side of the lean.

Mitigate the chance of a barber chair by performing a boring backcut, which severs internal wood fibers and relieves tension forces. **This allows the hinge to be set evenly across the bole before the tree begins to commit to the lay.**

When performed correctly, this technique will reduce the chance of a barber chair. It is the safest option for felling forward-leaning trees and hardwood species prone to barber chair due to natural wood fiber characteristics.

Do not attempt a boring backcut if hinge wood is compromised.

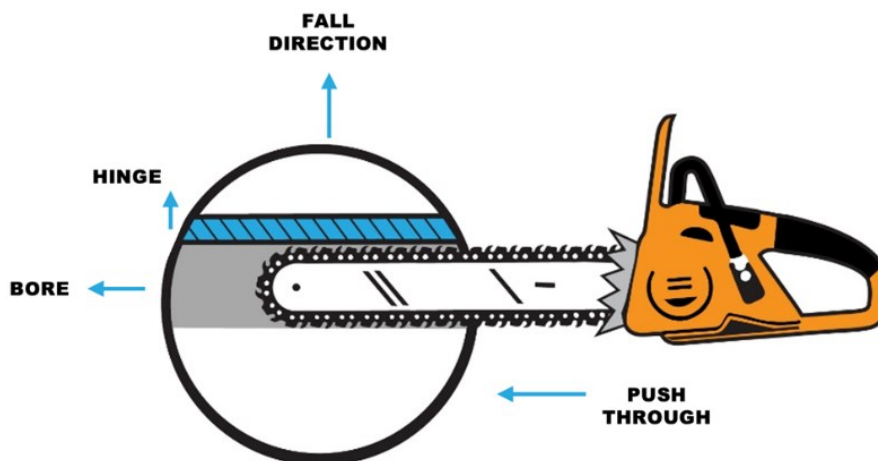

Cut Sequence

- Undercut — This wood is under high compression, so watch the kerf carefully to minimize bar pinch. A one-quarter-diameter or smaller undercut is the standard but can vary depending on the amount of lean. For larger trees, a series of smaller undercuts placed at increasing depth may be required to prevent bar pinch.
- Bore-In Cut — Bore behind the hinge wood, about the middle third of the tree, and cut forward towards the undercut. Stop when the desired hinge wood thickness is set. Utilize gunning sights aligned with the target to ensure hinge thickness is even across the stump.

- **Backcut** — Remove the saw and flip the bar over before progressing the cut towards the back of the tree. Stop and remove the saw when a strap of unsevered wood, approximately 10 percent of the tree's diameter, remains across the stump.
- **Finish Cut** — The final cut, often made using only the tip of the bar, is performed from the back of the tree. Cut forward to sever the remaining strap of wood. To prevent a high release of energy, avoid severing all the tension wood, allowing wood fibers to be pulled from the tree, and thus slowing the tree's release. This increases safety by allowing the sawyer to stand further from the tree during the final stage of the backcut and providing more time to escape. To avoid the saw pulling up and away when severing the back strap, enter one kerf width or more below the bore-in portion of the backcut.
- When cutting a large tree with a small bar, a bore can be made from each side using the double cut technique, provided the integrity of the wood in the finished cut is sound.

Hang-up Trees

Standards

- Sawyers recognize, anticipate, and predict the potential movement and reaction of hung trees involved when implementing the cutting plan.

Narrative

Many sawyers approach a hung-up tree without a specific plan and cut a vertical slash cut, commonly known as fence posting. The pitfall with this technique is that the tree will drop straight down, giving the sawyer little opportunity to get out of the way. Also, the tree will often become more vertical with each section cut.

The more vertical a hang-up tree becomes, the less control the sawyer has over the direction it will fall. Using an undercut and hinge helps provide some directional control and may be the safer option when considering removal.

Procedural Sizeup

A complete procedural tree sizeup is essential for all saw operations and is increasingly critical to life and safety when choosing to remove a hung-up tree. Sizeups are best completed by the sawyer and swamper together to minimize overlooking any hazards and to develop the safest plan possible. Forces within the hang-up and supporting trees should be evaluated for compression, tension, and side bind. This will provide clues for how the tree will respond to cutting. Remember, the safest plan may be to simply avoid the hung-up tree and not attempt removal.

Essential Factors When Considering Removal of Hang-up Trees

- Is the top of the hang-up tree visible or obscured?
- Determine whether the tree is hung solidly. Always treat hung-up trees as if they could come down at any moment, and never stand under the lean. Are the limbs, bole, or both causing the hang-up?
- If a tree is solidly hung-up and the limbs are intact, it may not need to come down.
- Is the tree still attached to the stump? The tree should first be cut free from the stump when it is possible to do it safely.

- The closer the hung-up tree is to being vertical, the saw operation will increase in complexity. Control can be easily lost, making the tree more likely to fall back towards a sawyer's escape path. Trees can always react unpredictably when released.
- What is the condition and strength of the hung-up tree and any supporting trees: alive, dead, fire-weakened, or decayed?
- A rotting or burning base needs to be evaluated for integrity to ensure it does not fail during the cutting process.
- Other hazards in the area (rolling hazards, adjacent trees, fire-weakened tops, hanging limbs, etc.) must be part of the risk analysis and sizeup.

Often, complexity and risk increase while cutting hang-ups, but the sawyer does not pause to reevaluate the increased risk. After each cut, reevaluate the situation.

Develop a Cutting Plan

- A hung-up tree is most often a sign of a high-complexity cutting operation. The complexity can increase or decrease with each action taken. When selecting which mitigations to implement, identify the circumstances most likely to reduce complexity and the associated risk.
- Determine where the butt of the tree must go to meet the objective. Planned cuts should reduce the angle of the hang-up.
- Consider options that may allow the tree to become more hung-up and eliminate the need for removal.
- Create contingency plans for unforeseen circumstances. For example:
 - A crew member becomes injured and needs to be evacuated (evacuation plan).
 - The top of the leaner breaks and falls back towards the sawyer. (Change the escape plan.)
 - A hung tree strikes other trees or limbs and falls back towards the sawyer. (Conduct a hazard assessment of the surrounding area.)
 - A hung tree strikes other trees, which causes a chain reaction of multiple trees falling. (Maintain work area control by utilizing two times the tree height.)


Techniques

Scissor Cut

- Utilize an open-faced undercut to separate the tree from the stump.
- To reduce exposure to the sawyer, consider making two opposing undercuts to sever the tree from the stump.
- Cut an open-faced undercut in the intended direction for the tree bole to move. Undercuts should be as wide as possible to allow for more movement before the undercut closes and the hinge breaks.
- Place a second undercut above the first 180 degrees in the opposite direction. The greater the distance between the two undercuts, the farther the bole can move once released.
- Place a backcut in the top and bottom undercuts. Monitor kerf movement and stop cutting as soon as the kerfs begin to open.

- The tree is now ready to be either tapped with a wedge in the lower cut, tapped with a tool, or pulled with a rope from a safer distance. Choose the method that allows for the greatest margin of safety for the sawyer to stand back from the tree as it breaks free.

The lower undercut is on the underside of the log, and the upper undercut is on the opposite side.

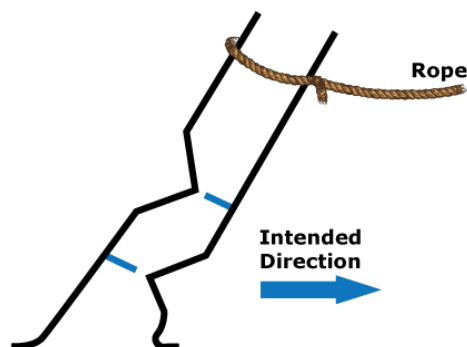


Bypass Cut or Fenceposts

Kerf cuts cause the tree to drop straight down. Fence posting quickly drops the leaner straight down, leaving little time for escape. This can result in a hung-up tree becoming nearly vertical and falling in an unpredictable direction.

1. Make the first cut perpendicular to the ground, cutting down from the top or the stem. Finish cutting the offside of the bole first while leaving the remaining fibers intact.
2. Stand back and continue cutting with the tip of the bar until kerf movement is observed. This will help determine what type of bind is present, depending on whether the kerf is opening or closing, and will guide the next steps.
3. Make the second cut offset approximately one-half inch, or one saw kerf wide, towards the bottom of the stem.
4. Continue monitoring the kerf and cutting until just before the cuts bypass. Step back, reassess the escape route, and reposition so the cut can be completed at arm's length using only the tip of the bar. Complete the cut until the two kerf cuts bypass or meet; the tree should shear off and drop straight down to the ground.

When performed correctly, this cut can be a safe option for removing a hung-up tree and will result in fewer cuts, less time, and exposure.


Fence posting.

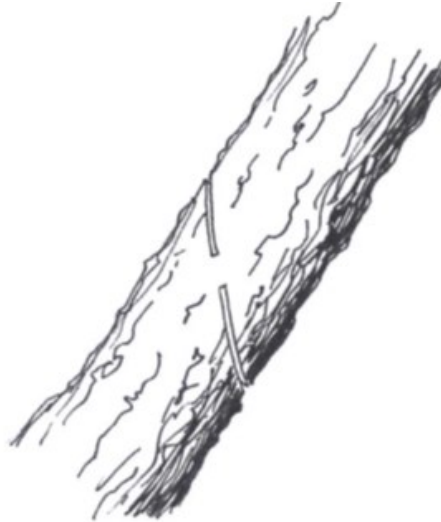

Directionally Felling a Leaner

- This may be a safer alternative, depending on conditions, although both cuts can be performed in a way that allows the sawyer to step back. Using a rope increases safety margin by allowing the sawyer to stand further away from the tree when it falls.
- This technique can be attempted if the tree has already been severed from the stump.
- Cut an open-faced undercut 180 degrees away from the intended direction to move the butt of the tree.
- Cut the backcut from the opposite side of the undercut. Stop just as the kerf begins to open, then safely knock the tree loose with a tool or felling axe after stepping back.

Opposite side cuts used to directionally fell a leaner.

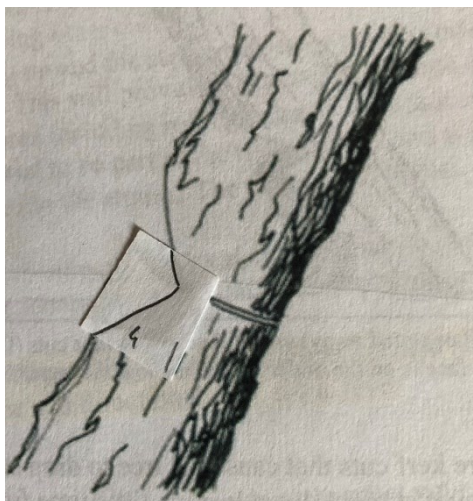


Use of a Rope for Increased Safety Margin

- After completing the undercut, tie a rope or p-cord above the cut.
- Make the backcut, starting with the offside and finishing with the bar tip while stepping back. Be ready to use the escape path. Stop when the kerf begins to slightly open.

- From a safe distance, pull the rope to release the tree.

Using a rope from a safe distance to release the tree after the backcut.

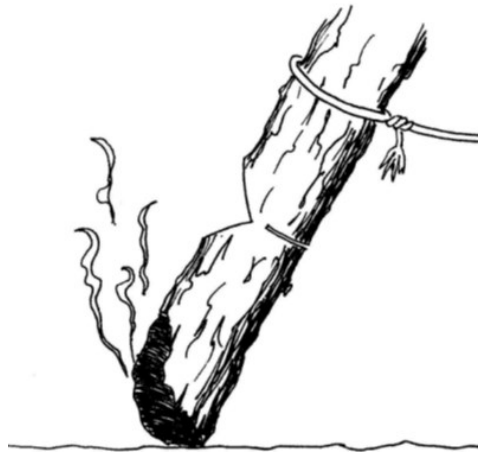

Lever Technique

Twisting a hang-up tree is also an option. In certain situations, a hang-up tree with sound limbs may be turned or twisted to release. Ensure that all limbs that pose a risk of catching or hitting the sawyer have been removed once the tree starts to spin.

A long lever can provide a mechanical advantage and allow a sawyer to stand further away from the tree, increasing safety margins. This is an advanced technique that requires vertical and horizontal boring operations. The hung-up tree fibers connecting the bole to the stump must be mostly severed from the stump or cut up to a point that will allow for torsional movement of the tree bole.

- A felling lever, peavy, or cant hook is the best tool to use as a lever when attempting to twist a hung-up tree free from another and roll it safely to the ground.
- If using an improvised lever that requires a square hole to be bored in the hung-up tree, ensure the tree diameter is large enough to accept the width of the bar when boring, and that enough solid wood will remain on either side of the bore hole to avoid breaking or shearing when force is applied as the lever is twisted. Bore a square hole parallel to the ground and at a comfortable and safe height.
- Select a branch or log of the correct size and length to fit the bore hole and withstand the forces exerted when twisting the hung-up tree. Green trees or limbs may flex too much, especially if the lever diameter is too small. Dead material can work well if it is sound enough not to break under pressure. The lever must be long enough to provide leverage and distance from the hung-up tree, but short enough to clear the ground and surrounding obstacles.
- Slowly begin twisting the lever in the desired direction. Utilize the escape path and stand well away as the tree begins to fall to the ground. In some situations, a rope can be added to pull the lever from a safe area further away.

Other Options

- Fall the hung-up tree and the supporting tree as a group — felling both trees may be a safer alternative, as it shifts exposure away from the leaner to the support tree. Be aware of the reaction of both trees and the possibility of being underneath the leaner as it releases.

- Driver tree — Consider felling another tree into a hang-up after carefully evaluating the additional complexity. OSHA does not prohibit using this technique to remove a dangerous tree, but be aware it may increase the overall complexity of the situation.


Limb-Tied Trees

Standards

- When situations dictate that two or more limb-tied trees be felled together as a single unit, sawyers will construct an undercut and place wedges in each backcut before moving to the next tree in a sequence. Begin with the smaller-diameter trees first so that the last and largest tree in the group can be used to commit all limb-tied trees towards the lay in a single group once the final backcut is made.

Narrative

- Begin with the smallest diameter tree first. Complete the undercut and backcut to the desired depth, and place a wedge snugly in the kerf.
- Continue the sequence until all trees in the group are cut and ready to be felled.
- Make the final cuts to the largest tree in the group (driver tree) in the same manner as the preceding trees. However, be prepared to utilize the escape path. Once the backcut is completed and the wedge is set, the group will begin to commit towards the lay and fall as a single unit.
 - Felling limb-tied trees as a group is considered a complex saw operation and should only be attempted by an experienced sawyer.
 - Ensure a well-developed escape plan is in place and utilize another green tree as cover whenever possible.

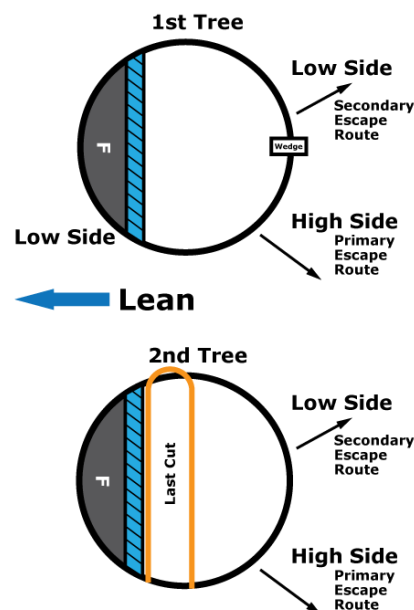

Steep Slopes

Steep slopes present additional hazards for sawyers.

- Misjudging lean — Slopes can make it difficult to determine tree lean. When attempting to read the lean, always determine the lean from uphill and directly to the side. Use a plumb bob to ensure accuracy.
- Roll out — Slopes can cause a tree to roll or bounce after falling or during bucking, which may compromise escape paths. Felling a tree directly uphill is often the safest placement for a tree and should be completed by utilizing a Humboldt or appropriate stump shot to help hold the bole of the tree in place after the cut. Avoid felling trees directly downhill, as trees may “torpedo” down the slope and compromise the safety of others.
- When multiple trees are felled or bucked on a slope, it can be advantageous to leave a larger stump height to retain trees and logs in place and prevent rolling.
- Cutting heights — Cutting on slopes is often made more difficult due to poor footing and significant height variations between the downhill and uphill sides of the tree. Humboldt undercuts are the preferred option on steep slopes and may be the only way a sawyer can reach all the cuts needed to safely fell a tree.
- Carve out solid footing areas in the dirt using hand tools, or consider cutting notches in the roots for better footing.
- Bucking — Avoid equal length and width cut sections when bucking, as these dimensions tend to quickly gain momentum when rolling downhill.
 - The best practice is to develop a plan for how the severed section of a log will be retained in place after the cut is made. Never lose control of logs that threaten the safety of others below the bucking operation.

Never fall or buck directly above or below others working on a slope. Coordinate with all resources above and below to stagger work teams and minimize the potential of becoming a target.

Fire-Damaged Trees

Felling fire-damaged trees adds additional complexity to felling operations. Fires often hide visible external defects and create new defects by consuming portions of the tree, typically where decay is present. Fire-weakened trees can often fall without notice and have been responsible for numerous firefighter fatalities and serious injuries.


- The scope and scale of hazards in post-fire tree felling increase operational complexity as a large number of trees will likely need to be felled before an area can be accessed safely.
- Even trees that appear healthy after a fire can have root system damage and fall unexpectedly.
- When large catfaces, burn scars, or only portions of the tree bole remain, cutting techniques and procedures will likely need to be altered and require advanced-level knowledge and experience.
- A catface is a surface defect on a tree resulting from a wound where healing has not reestablished the normal cross-section.
- Trees with broken-out tops or decay columns in the heartwood can catch fire, as embers in cavities can easily ignite. These snags or “stove pipes” are extremely hazardous because the remaining rind thickness left inside the tree cannot be determined. The cylindrical shape of the

bole allows airflow, which can intensify fire activity and further weaken the tree. Loss of tree canopy, internal tree weight, and high heat from active fire make hand felling these snags extremely difficult. In all these situations, it is important to continually size up the tree as conditions change and consider alternate options to hand felling. Hand felling fire-damaged trees is considered a highly complex operation.

Fire-Damaged Tree Sizeup Considerations

- Determine if a tree has a target. If workers do not need to be in the area, leaving the tree may be the safest option. Such trees may provide habitat for wildlife.
- Evaluate the rind thickness from the area with the least amount of remaining wood. A good rule of thumb is that the rind should be at least one-third of the stem radius. When the rind thickness (t) is less than one-third of the stem radius (R), complexity increases. For example, one-third of a 15-inch radius (R) is 5 inches. If (t) is less than 5 inches, consider an alteration to the cut plan due to the potential structural instability of the tree.

Evaluating Rind Thickness Relative to Stem Radius

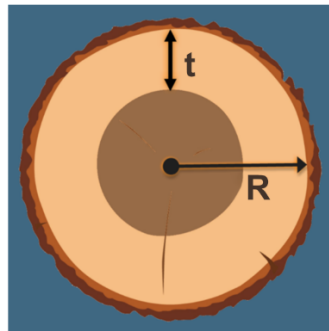

When **rind thickness (t)** is *less than* $1/3$ **radius (R)**, it is an indicator of increased complexity.

Watch out when $t/R < 1/3$

- Evaluate the tree for hinge wood throughout the operation. Ideally, create a hinge across the bole, taking into consideration burned, hollow, or missing wood sections, and treating the tree as if it is still intact. Fall with the primary lean whenever possible to avoid pounding wedges as tops, branches, and the bole are weakened and prone to failure.
- Evaluate the root system for fire damage. Be extremely cautious of damaged root systems, especially when less than 50 percent of the root system remains intact.
- Consider the pre-fire condition of the tree. Decayed wood may have been consumed by fire, further increasing tree instability.
- Existing dead and fire-weakened trees typically have brittle wood fibers, which increase the likelihood of hinge failure during felling.
- Try to eliminate the need to wedge over a fire-weakened tree and use extreme caution when it becomes necessary, as overhead hazards are present and often numerous.

Many serious injuries and fatalities have occurred when sawyers fail to complete a thorough tree sizeup before beginning saw operations. Critical steps have also been overlooked when conditions change, and the original objective has not been reassessed before continuing. A procedural sizeup must be an ongoing and continual process, especially when felling fire-weakened trees. Do not hesitate to walk away from a situation when a tree is deemed too hazardous to cut. Flag off the area and consider other options.

- Consider the compounding effects of fire on dead, decayed, or previously damaged trees.

Fire-damaged trees.




Some trees are best left alone.



Candlesticks

- Candlesticks or stovepipes are trees with broken-off tops and hollow cores that have been fire-damaged or are currently burning.
- Without a canopy, with a hollow core, and/or with little lean, these trees can be difficult to fell utilizing a traditional one-third diameter undercut.
- An oversized undercut of approximately one-half the tree's diameter will help shift the tree's natural balance forward into the undercut, allowing the tree to commit more easily toward the intended lay.
- The hinge wood available may be limited to a few inches of rind on either side or could be significantly compromised in the center of the tree. During the procedural sizeup, take the time needed to perform a thorough assessment of the wood fiber available at the hinge.

Candlestick with $\frac{1}{2}$ diameter undercut.

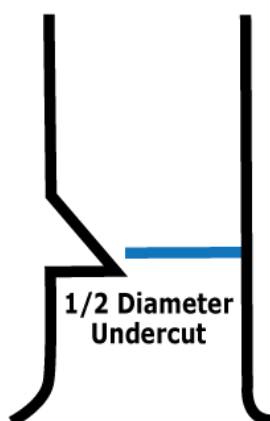

Appendix A: Common Sawyer-Specific Duties

Prepare

1. **Remain mentally and physically fit and able to determine when conditions have changed, affecting your fitness for duty status.**

When to start task: Mental and physical fitness is a constant state.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Position Qualifications*, PMS 310-1

How to accomplish task:

- Mental Well-Being Standards
 - Sawyers recognize the impacts of mental health on job performance and safety.
 - Sawyers understand how mental well-being impacts their safety and performance on the fireline.
 - Before picking up a saw, a sawyer should consider their current state of mind. Even when intentions are to focus on a work assignment, mental factors can intervene.
 - It just takes one moment of distraction for a negative outcome to occur. If a sawyer is feeling distracted, use the opportunity to pass off the chainsaw.
- Physical Well-Being Standards
 - Sawyers must be physically fit and successfully pass the wildland fire work capacity test as defined in the *NWCG Standards for Wildland Fire Position Qualifications*, PMS 310-1.
 - Sawyers understand how physical well-being impacts their safety and performance on the fireline.
 - Chainsaw operations require a balance of proper technique and muscular fitness to accomplish cutting objectives.
 - Proper posture and muscular strength of the lower body, torso, and shoulders provide a stable foundation from which the chainsaw can be manipulated.
 - Muscular endurance and proper chainsaw handling should be emphasized to prevent a lapse in chainsaw control.

2. **Ensure individual and equipment readiness.**

When to start task: When ordered to a new assignment or reassigned to a different task, personnel must be mentally and physically ready for the assignment and ensure equipment is ready and appropriate for the assignment.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 3
- Equipment-specific owner's manual

How to accomplish task:

- When experiencing mental or physical fatigue and stress, communicate this to the fireline supervisor to allow for recovery or downtime.

- Emulate best practices regarding the condition of equipment, tools, and supplies. See references below:
 - *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 3 — Additional Equipment.
 - A list of commonly needed replacement parts with item numbers specific to the make and model of equipment being used.
 - A commercially manufactured axe or wedge-driving tool of sufficient size and weight that meets OSHA standards.

3. Continually strive to improve, learn from others, and develop safe practices that reinforce good habits and decision making.

When to start task: From the time of hire and throughout a career, the learning process is an important factor in honing and improving skills.

Specific resources to complete task: None

How to accomplish task:

- Seek performance feedback from trainers and more experienced sawyers.
- Learn from mistakes by talking about them and seeking to improve.
- Foster a learning culture where accidents are reported and analyzed to build knowledge from lessons learned.
- Study learning products (Facilitated Learning Analyses [FLAs], Rapid Lesson Sharing [RLS], etc.) and utilize near miss information to increase awareness of contributing conditions and accident precursors.
- Make predictions about the effects of each cut and regularly compare outcomes with those predictions to improve prediction certainty.
- Under the immediate direction of a more experienced and qualified sawyer, size up and engage in cutting operations that foster growth and development.

Mobilize

1. Gather critical information pertinent to the assignment.

When to start task: When ordered as a single resource.

Specific resources to complete task:

- Home unit
- Dispatch centers
- Assignment point of contact (POC)

How to accomplish task: Work with the home unit, dispatch centers, and assignment POC to obtain all critical information related to the assignment.

2. Travel to and check in at the assignment. Notify incident supervisor and/or dispatch when arriving at the incident.

When to start task: When ordered as a single resource.

Specific resources to complete task:

- Home unit
- Dispatch centers
- Assignment POC

How to accomplish task:

- Work with the home unit, dispatch centers, and assigned POC for travel and check-in information.
- Notify the incident supervisor and/or dispatch of the expected arrival time at the incident.

3. Obtain initial briefing from supervisor.

When to start task: When ordered as a single resource or as part of a crew/module.

Resources to complete task:

- Incident supervisor
- Incident information portals (e.g., Inciweb)

How to accomplish task: Obtain an initial briefing from the incident supervisor and clarify any questions prior to beginning the assignment.

Build the Team

1. Model leadership values and principles.

When to start task: Developing leadership values and principles is a continual process and skill set that is honed over time. Opportunities to influence and mentor others should be sought out and prioritized as the operational tempo allows.

Specific resources to complete task:

- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Operational Leadership, Communication Responsibilities, Leader's Intent, Human Factors, and After Action Review

How to complete task:

- Provide mentorship opportunities.
- When mentoring, ensure Advanced, Intermediate, or Basic Fallers are modeling behaviors consistent with policy and the standards of this document.
- Verify that concepts and techniques are understood and their application is appropriate.
- Take every opportunity to perform all duties professionally and to a high standard of quality.

Communicate and Coordinate

1. Establish and maintain positive communication and coordination with saw teams, your crew, adjoining resources, and supervisors in the work area.

When to start task: Prior to engaging in saw operations and continuously throughout.

Specific resources to complete task:

- Radio
- Verbal and nonverbal communication
- Incident Action Plan (IAP)

How to accomplish task:

- Establish contact with all personnel who may be involved in or affected by saw operations.
- Maintain appropriate communication throughout the saw operations by:
 - Designating a POC to establish and maintain communications.
 - Checking in when conditions or operations change, or to report progress.

2. Before engaging, receive a thorough briefing from the appropriate supervisor addressing all saw operation specifications and associated expectations.

When to start task: Prior to beginning work assignments, report to the immediate supervisor to obtain the saw operation briefings.

Specific resources to complete task:

- Immediate fireline supervisor
- Knowledge of the work area
- IAP
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Briefing Checklist

How to accomplish task:

- Receive a thorough briefing and associated expectations.
- Ensure briefings establish cutting objectives, priorities, and fireline specifications for the assignment based on fuels, weather, topography, and expected fire behavior.
- Review and be familiar with the Medical Plan and medical resources near the work area.

3. Participate in After Action Reviews (AARs) and information sharing.

When to start task: Upon completion of saw operations or when relevant information sharing is needed.

Specific resources to complete task:

- All personnel involved in saw operations.

How to accomplish task: Use the AAR format appropriate for individual or group situations. Share any new information learned after the initial briefing that could affect saw operations. Roll up key points to the supervisor to support shared learning.

Manage Risk

1. Apply the Risk Management Process as stated in the *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461.

When to start task: Risk management is an ongoing process.

Specific resources to complete task:

- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Operational Engagement
- Job Hazard Analysis or Risk Management Assessments

How to accomplish task: Review and apply the Risk Management Process as outlined in the *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461.

2. Apply Lookouts, Communications, Escape Routes, and Safety Zones (LCES) to all saw operations.

When to start task: LCES should be established whenever assigned to an ongoing wildland fire incident and reassessed periodically as conditions and work locations change.

Specific resources to complete task:

- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Operational Engagement
- IAP for fire behavior, weather, and maps

How to accomplish task: Review and implement LCES as outlined in the *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461.

3. Plan for and manage medical emergencies.

When to start task: Planning for medical emergencies begins at mobilization and must be adjusted as work zones progress throughout the incident.

Specific resources to complete task:

- Established local procedures
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Emergency Medical Care
- IAP
- Medical Plan (ICS 206 WF)
- Radios
- Medical equipment

How to accomplish task:

- Identify medical first responders in the work area.
- Identify medical equipment in the work area.
- Review incident medical plans.
- Identify communication procedures for requesting assistance.
- Coordinate with the supervisor to establish evacuation scenarios and transportation plans.

4. Report all accidents, injuries, or near misses to supervisor.

When to start task: Reporting of an identified accident, injury, or near miss should occur based on the procedures established by the supervisor and applicable agency policy.

Specific resources to complete task:

- Incident Medical Plan
- Medical Incident Report
- Appropriate AAR or Lesson Learned format
- IAP
- SAFENET

How to accomplish task: Reporting all accidents, injuries, or near misses is the responsibility of all personnel. Reporting incidents supports a learning culture, improves sawyer experience, fosters skill development, and increases awareness.

5. Comply with all standards for chainsaw operations as defined in *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, and established agency standards for saw operating procedures.

When to start task: When engaged in saw operations, comply with all safety practices and agency-established standards for saw operating procedures.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212
- Agency-specific standards

How to accomplish task:

- Know and apply the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212 standards, and applicable agency-specific policies when operating the chainsaw.

6. Establish and maintain work area control.

When to start task: When engaged in saw operations.

Specific resources to complete task:

- Radio(s)
- IAP
- Swampers
- Additional personnel within the work area (road/trail guards, etc.) to act as lookouts

How to accomplish task:

- Refer to the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 2 — Work Area Control section.
 - The chainsaw operator is ultimately responsible for controlling the work area.
 - No one may enter the secured work area without authorization from the sawyer.
 - Supervisors must support sawyers implementing work area control measures.

- Maintain work area control by ensuring all personnel directly involved in saw operations inside the work area are in a pre-identified safe location and remain there until all saw operations are completed and verbal confirmation, such as “all clear,” has been communicated.
 - Identify work areas to prevent trees from falling into adjacent occupied work areas. Maintain a minimum separation distance of two tree lengths between adjacent occupied work areas, increasing distance as necessary based on slope, tree height, density, soil conditions, and other hazards. A distance of greater than two tree lengths shall be maintained on any slope where it is reasonably foreseeable that rolling or sliding of trees or logs would impact the other work area.
 - Avoid working directly below felling or bucking operations.
 - No employee shall approach a faller closer than two tree lengths (from the trees being felled) until the faller has acknowledged that it is safe to do so, unless the faller determines that a team of employees is required.
 - Establish and maintain competent lookouts at all major access points, including roads and trails that provide access to the secured work area.
 - Identify and communicate all hazards that could not be mitigated — such as hang-ups, unstable logs, or other dangers — before approving access into the work area.
 - Designate and communicate No-Work Areas where hazards cannot be mitigated.

7. Develop and follow safe cutting area practices when using a swamper during saw operations.

When to start task: Anytime saw operations require the use of a swamper.

Specific resources to complete task:

- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Communication Responsibilities
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Sawyer/Swamper Teams

How to accomplish task:

- Develop and follow safe working distances and communication practices when using a swamper during saw operations.
- Limit personnel in the cutting area to only those necessary to accomplish the task.
- The saw team will assess the work area and develop tactics appropriate to accomplish objectives.
 - Establish verbal and nonverbal communication procedures to be used during operations.
 - Maintain cutting area control and tempo and adjust operational based on terrain, fuel type, fatigue, fire behavior, and weather conditions (e.g., wind, rain, or snow).

Demobilize

1. Ensure equipment is in good working condition for next assignment and resupply used or damaged equipment as necessary.

When to start task: After each saw operation and when preparing to demobilize.

Specific resources to complete task:

- General Message Form (ICS 213)
- Property Loss or Damage Report (OF 289)
- Incident Replacement Requisition (OF 315)
- IAP
- Incident Supply Unit
- Finance Section

How to accomplish task:

- Refurbish equipment after each saw operation or daily to ensure readiness.
- Work with the incident supervisor for approval to replace used or damaged equipment.
- Follow incident resupply protocols, which may be outlined in the IAP.
- FAL3s and FAL2s may be working through their immediate supervisor to accomplish resupply tasks.

2. Return equipment and supplies to appropriate units.

When to start task: During the incident and when preparing to demobilize.

Specific resources to complete task:

- Incident supervisor
- ICS unit leaders responsible for issued equipment and supplies

How to accomplish task: Utilize a demobilization checklist and contact the appropriate units to understand the process for returning equipment and supplies.

3. Complete demobilization checkout process before being released from the incident.

When to start task: Prior to demobilizing from the incident.

Specific resources to complete task:

- Demobilization Unit Leader
- IAP

How to accomplish task: Follow local procedures or IAP guidance and coordinate with the Demobilization Unit to understand the demobilization checkout process before being released from the incident.

4. Upon demobilization, report status to the home unit, including reassignment or estimated time of arrival (ETA) to the home unit.

When to start task: When demobilizing from the incident.

Specific resources to complete task:

- Home unit
- *Interagency Standards for Fire and Fire Aviation Operations* (Red Book)

How to accomplish task:

- Upon demobilization, report status to the home unit, including reassignment or ETA, while ensuring safe travel and communications.
- Follow agency travel guidelines as outlined in the *Interagency Standards for Fire and Fire Aviation Operations* (Red Book).

Common Sawyer Resources:

Personnel:

- Home unit supervisor
- Incident/fireline supervisor
- Safety Officers
- Assignment POC
- Sending and receiving dispatch centers
- Supervising sawyers/more experienced sawyers/mentors

References:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, <https://www.nwcg.gov/publications/pms212>
- Equipment owner's manual
- OSHA CFR 1910.266 Logging Standards, <https://www.osha.gov/laws-regs/regulations/standardnumber/1910/1910TableofContents>
- S-212, Intermediate Faller (FAL2)
- IAP, incident maps
- *NWCG Standards for Wildland Fire Position Qualifications*, PMS 310-1, <https://www.nwcg.gov/publications/310-1>
- *Interagency Standards for Fire and Fire Aviation Operations* (BLM, NPS, FWS, BIA, USFS), <https://www.nifc.gov/standards/guides/red-book>
- National Fuel Geyser Awareness website, <https://www.nwcg.gov/committees/equipment-technology-committee/national-fuel-geyser-awareness>
- FSM 2358 USFS National Saw Policy, https://www.fs.usda.gov/sites/default/files/2358-Saw-Policy-TAI-6-11-15_0.pdf
- NPS National Chainsaw Policy Reference Manual
- *NWCG Standards for Transporting Fuel*, PMS 442, <https://www.nwcg.gov/publications/pms442>

Tools:

- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, <https://www.nwcg.gov/publications/pms461>.
- Note paper/writing utensils

- Radio
- An electronic device (phone/tablet)
- Chainsaw operator PPE
- Chainsaw operator field tool/parts kit
- Chainsaw
- Approved fuel and bar oil containers
- Wedges appropriate to conditions
- Wedge-driving tool

Appendix B: Advanced, Intermediate, and Basic Faller (FAL1, FAL2, and FAL3) Position Standards

Advanced Faller (FAL1)

The Advanced Faller (FAL1) has multiple years of experience in chainsaw operations and has demonstrated proficiency in performing high-complexity saw operations, including tree felling, bucking, brushing, and limbing. The FAL1 may work independently or supervise/direct Intermediate (FAL2) and Beginner (FAL3) Fallers during fireline saw operations. The FAL1 may serve as a single resource or as a member of a firefighting crew or module. When assigned as a single resource, the FAL1 reports to a Felling Boss (FELB), Strike Team/Task Force Leader (TFLD), or other assigned supervisor. The FAL1 works in the Operations Section.

Build the Team

1. Participate in and/or direct the development and implementation of saw related objectives, priorities, and work assignments for saw team members.

When to start task: Anytime engaged in saw operations. A FAL1 may be asked to participate in the development of saw related objectives, priorities, and work assignments for the saw team members. Upon receiving a briefing from the fireline supervisor, implement or coordinate assignments as directed.

Specific resources to complete task:

- IAP
- Maps
- Additional project-related information
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Briefing Checklist

How to accomplish task:

- Attend the Operational Period Briefing and receive a tactical briefing from the supervisor. Clarify direction as needed.
- Identify, analyze, and apply relevant situational information to make informed decisions and take appropriate actions as a single resource.
- Develop appropriate strategies and tactics to accomplish objectives.
- Develop and prioritize work assignments in accordance with sawyer certifications and capabilities.
- Perform a saw team briefing to ensure less-experienced sawyers understand strategies and tactics.
- Evaluate progress and make operational adjustments as needed.
- Provide status updates.

2. Participate in training and mentoring Basic (FAL3) and Intermediate (FAL2) Fallers in the classroom and field.

When to start task: Qualified FAL1s are expected to mentor and teach within the scope of their knowledge and abilities to ensure their own safety and development, as well as less-experienced sawyers working alongside them. Mentorship and teaching are critical for continued individual growth and the development of future sawyers.

Specific resources to complete task:

- NWCG chainsaw training resources
- Wildland Fire Lessons Learned Center
- Wildland Fire Safety Training Annual Refresher (WFSTAR) modules
- NWCG leadership curriculum

How to accomplish task:

- Facilitate formal training opportunities such as S-212, Intermediate Faller (FAL2).
- Participate in the evaluation and certification of less-experienced sawyers.
- Provide quality constructive feedback to less-experienced sawyers.
- Verify concepts and techniques being taught are properly understood and appropriately applied.
- Identify and correct safety concerns in a timely manner.
- Provide learning and development opportunities in both classroom and field scenarios.
- Review and study injury and near miss reports to continue learning and further develop knowledge.
- Seek opportunities to serve as a subject matter expert (SME) during FLAs or other learning reviews.

Manage Risk

1. Develop a Job Hazard Analysis or Risk Management Assessment for a chainsaw operation.

When to start task: As a FAL1 trainee or qualified FAL1, sawyers are expected to understand the Risk Management Process clearly enough to outline the requirements of a Job Hazard Analysis or Risk Management Assessment.

Specific resources to complete task:

- Agency-specific JHA or Risk Management documentation
- Local or incident safety officer
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Risk Management Process

How to accomplish task:

- Identify and evaluate potential chainsaw operations.
- Identify associated hazards.
- Assess hazards for probability, severity, and exposure.

- Recognize the effects of human factors in managing risk.
- Develop controls or necessary mitigations to support informed risk decision making.
- Improve understanding of how human factors impact saw operations.
- Seek appropriate levels of review and approval.

2. Recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.

When to start task: Operational complexity is an ongoing assessment process. Sawyers should learn to recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Complexity Fade Chart
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Communication Responsibilities and Risk Management Process
- WFSTAR Module “When Complexity Changes”

How to accomplish task:

- Utilize a risk management assessment to determine the viability of objectives.
- Apply NWCG standard sizeup procedures, complexity tools (such as the Complexity Fade Chart in the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212), and experience to determine complexity.
- Identify trigger points when complexity changes and the need for additional mitigation methods.
- Recognize and communicate when complexity exceeds sawyer capabilities or comfort level.
- Implement go/no-go decisions based on operational complexity. Sawyers always retain the option to not engage in saw operations.
- Ask for additional assistance from another experienced sawyer.
- Report pertinent changes to the appropriate supervisor.

Perform Advanced Faller-Specific Duties.

1. Develop and safely execute plans for low to high complexity saw operations, including those that may require unconventional techniques to meet an objective.

When to start task: Prior to engaging in saw operations, perform a sizeup and complexity analysis of the situation and develop an appropriate plan.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Sizeup Procedures and Complexity Fade Chart
- WFSTAR Chainsaw Operations Modules

How to accomplish task:

- Apply prior experience ability, knowledge, and analysis to resolve complex cutting situations with limited options.

- Utilize the standard sizeup procedures to identify less obvious elements of complexity and develop mitigations, including unconventional techniques.
 - Analyze and communicate species, hazards, topography, seasonality, and geographic considerations affecting the cut plan.
 - Utilize local knowledge and resources when available to gain a better understanding of local factors.
- Perform low to high complexity brushing, bucking, limbing, and felling operations proficiently under a variety of conditions, using conventional and unconventional techniques.
- Recognize the increased complexity posed by snags and hung-up and make a go/no-go decision based on mitigation.
- Utilize the chainsaw to complete low to high-complexity direct and indirect fireline construction, mop-up and securing duties as directed by the fireline supervisor.
- Identify and safely mitigate hazards associated with wildland urban interface (WUI) environments during chainsaw operations.
- Turn down and communicate any operation that becomes unsafe or exceeds capabilities or comfort level; develop alternate mitigation methods.
- Continually reassess the situation for complexity changes to make a go/no-go decision and perform a new sizeup when complexity changes. When hazards cannot be mitigated, a new objective needs to be considered.

2. Maintain certification and qualification by demonstrating proficiency of Advanced Faller knowledge and technical skill to a qualified Advanced Faller evaluator(s) per agency protocol.

When to start task: Prior to sawyer certification lapsing.

Specific resources to complete task:

- Evaluators qualified at the same or one position level higher per agency protocol
- NWCG Interagency field sawyer certification form

How to accomplish task:

- Seek opportunities to remain proficient at the current qualification level. The knowledge and skills necessary to perform the duties of a FAL1 must be actively maintained through continuous engagement and practice.
- Accurately record saw experience on the Incident Qualifications and Certification System (IQCS) Responder Update Sheet.
- Complete sawyer recertification on a triennial cycle per agency requirements.
- Submit updated sawyer evaluations to the Unit Training Officer for IQCS entry.

3. Demonstrate proficiency in recognizing the effects of specific tree anatomy which may influence the cut plan and defects contributing to failure. Teach less-experienced sawyers the fundamental elements of tree anatomy.

When to start task: Hazard tree identification is an ongoing learning process. Sawyers must learn to identify tree species and defects related to failure throughout all field operations. Capitalize on opportunities to share knowledge and mentor other sawyers.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 8
- Geographic area-specific field guides
- WFSTAR Hazard Tree video
- Hazard Tree and Tree Felling Subcommittee documents

How to accomplish task:

- Identify tree anatomy and defects contributing to failure. Develop a cut plan with consideration to the effects of known hazards:
 - Fire-weakened trees and necessary mitigations.
 - Rotten or compromised fiber and its effects on tree structure.
 - Recognize and adjust the plan based on the effects of lean present.
 - Recognize and adjust the plan based on canopy weight and distribution.
 - Recognize and identify tree species and their common defects.
- Seek out official training and resources to expand knowledge.
- Use local knowledge to identify gaps.
- Use a qualified person or identification references to assist in tree identification.

4. Demonstrate advanced knowledge of chainsaw components and proficiency in maintenance and repair.

When to start task: Prior to saw operations and continuously throughout assignments.

Specific resources to complete task:

- Equipment owner's manual
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 3
- Local or incident equipment repair resources
- More experienced sawyers
- Advanced mechanical training and references
- Specialty tools

How to accomplish task:

- Troubleshoot performance and mechanical problems and perform advanced maintenance on the chainsaw powerhead and guide bar. Recognize when components should be replaced.
- Demonstrate standard methods used to adjust the tuning of the chainsaw carburetor with a tachometer.
- Identify mechanical conditions that require repair by a shop mechanic.
- Mentor less-experienced sawyers in troubleshooting and repair.
- Identify and mark equipment as "out of service" in accordance with agency guidelines.

Intermediate Faller (FAL2)

The Intermediate Faller (FAL2) has demonstrated the proficiency to work unsupervised while engaging in moderate complexity fireline saw operations, including tree felling, bucking, brushing, and limbing. A FAL2 may perform FAL1 tasks under the direct supervision of a FAL1. The FAL2 may serve as a single resource or as a member of a firefighting crew or module and may be tasked to provide oversight to Basic Fallers (FAL3). When assigned as part of a module, the FAL2 reports to a Firefighter Type 1 (FFT1) or one of the Single Resource Bosses (FELB, CRWB, ENGB, FIRB, HMGB). When serving as a single resource, the FAL2 reports to a Felling Boss (FELB), Strike Team/Task Force Leader (TFLD), or other assigned supervisor. The FAL2 works in the Operations Section.

Build the Team

1. Participate in the development and implementation of saw related objectives, priorities, and work assignments for saw team members.

When to start task: Anytime engaged in saw operations. A FAL2 may be asked to participate in the development of saw related objectives, priorities, and work assignments for the saw team members. Upon receiving a briefing from the fireline supervisor, implement the assignment as directed.

Specific resources to complete task:

- IAP
- Maps
- Additional project-related information
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Briefing Checklist
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212

How to accomplish task:

- Attend the Operational Period Briefing and receive a tactical briefing from a supervisor. Clarify directions as needed.
- Scout and validate objectives.
- Utilize appropriate strategies and tactics to accomplish objectives.
- Accept work assignments in accordance with sawyer certifications, capabilities, and assigned equipment.
- Perform a saw team briefing to ensure less-experienced sawyers understand strategies and tactics.
- Evaluate progress and adjust operations as needed.
- Provide status updates.

2. Participate in training and mentoring Basic Fallers (FAL3) in the classroom and field.

When to start task: Qualified FAL2s are responsible for mentoring and teaching within the scope of their knowledge and abilities to ensure their own safety and development, as well as less-experienced sawyers working alongside them. Mentorship and teaching are critical for continued individual growth and the development of future sawyers.

Specific resources to complete task:

- NWCG chainsaw training resources
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212
- Wildland Fire Lessons Learned Center
- WFSTAR modules
- NWCG Leadership Curriculum

How to accomplish task:

- Participate in formal training opportunities, such as S-212, Intermediate Faller (FAL2).
- Provide quality, constructive feedback to less-experienced sawyers.
- Identify and correct safety concerns in a timely manner.
- Provide additional learning and development opportunities in both classroom and field scenarios.

Manage Risk**1. Recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.**

When to start task: Operational complexity is an ongoing assessment process. Sawyers should learn to recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Complexity Fade Chart
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Communication Responsibilities and Risk Management Process
- WFSTAR Module “When Complexity Changes”

How to accomplish task:

- Utilize a risk management assessment to determine the viability of objectives.
- Apply NWCG standard sizeup procedures, complexity tools such as the Complexity Fade Chart in the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, and experience to determine complexity.
- Identify trigger points when complexity changes and the need for additional mitigation methods.
- Recognize and communicate when complexity exceeds sawyer capabilities or comfort level.
- Implement go/no-go decisions based on operational complexity. Sawyers always retain the option to not engage in saw operations.
- Ask for additional assistance from another experienced sawyer.
- Improve understanding of how human factors impact saw operations.
- Report pertinent changes to the appropriate supervisor.

Perform Intermediate Faller-Specific Duties

1. Develop and safely execute a plan to resolve low to moderate complex saw operations, including those that may require unconventional techniques to meet an objective.

When to start task: Prior to engaging in saw operations, perform a sizeup and complexity analysis of the situation and develop an appropriate plan.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Procedural Sizeup and Complexity Fade Chart
- WFSTAR Chainsaw Operations Modules

How to accomplish task:

- Utilize the standard sizeup process to identify elements of complexity.
 - This may include species, hazards, topography, seasonality, and geographic considerations affecting the cut plan.
 - Utilize local knowledge and resources when available to gain a better understanding of local factors.
 - Perform low to moderate complexity brushing, bucking, limbing, and felling operations proficiently under a variety of conditions, using conventional and unconventional practices.
 - Recognize the increased complexity posed by snags and hung-up trees and make a go/no-go decision on mitigation.
 - Utilize the chainsaw to complete low to moderate complexity direct and indirect fireline construction duties, mop-up, and securing duties as directed by the fireline supervisor.
 - Identify and safely mitigate hazards inherent with WUI environments during chainsaw operations.
 - Turn down and communicate any operation that becomes unsafe or exceeds capabilities or comfort level; consider alternate mitigation methods.
 - Continually reassess the situation for complexity changes to make a go/no-go decision and perform a new sizeup when complexity changes. When hazards cannot be mitigated, consider a new objective.
 - Apply prior experience, knowledge, and analysis to resolve complex cutting situations with limited options.
 - Identify and safely mitigate hazards associated during chainsaw operations.
- ### **2. Maintain certification and qualification by demonstrating proficiency of Intermediate Faller knowledge and technical skill to a qualified Intermediate or Advanced Faller evaluator(s) per agency protocol.**

When to start task: Prior to sawyer certification lapsing.

Specific resources to complete task:

- Evaluators qualified at the same or one position level higher per agency protocol
- NWCG Interagency field sawyer certification form

How to accomplish task:

- Seek opportunities to remain proficient at the current qualification level.
- Accurately record saw experience on the IQCS Responder Update Sheet.
- Complete sawyer recertification on a triennial cycle per agency requirements.
- Submit updated sawyer evaluations to the Unit Training Officer for IQCS entry.

3. Continue learning tree anatomy and defects contributing to failure, as well as teaching less-experienced sawyers fundamental elements of tree anatomy.

When to start task: Hazard tree identification is an ongoing learning process. Sawyers must learn to identify tree species and defects related to failure throughout all field operations. Capitalize on opportunities to share knowledge and mentor other sawyers.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 8
- Geographic area-specific field guides
- WFSTAR Hazard Tree video
- Hazard Tree and Tree Felling Subcommittee documents

How to accomplish task:

- Identify tree anatomy and defects contributing to failure. Develop a cut plan with consideration of the effects of known hazards:
 - Partially rotten or compromised fiber and its effects on tree structure.
 - Recognize and adjust the plan based on the effects of the lean present.
 - Recognize and identify tree species and their common defects.
- Seek out official training and resources to expand knowledge.
- Use local knowledge to identify gaps.
- Use a qualified person or identification references to assist in tree identification.

4. Demonstrate knowledge of chainsaw components and proficiency in maintenance and repair.

When to start task: Prior to saw operations and continuously throughout assignments.

Specific resources to complete task:

- Equipment owner's manual
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 3
- Local or incident equipment repair resources
- More experienced sawyers

How to accomplish task:

- Troubleshoot performance problems and correct minor mechanical problems in the field.
- Perform thorough preventative maintenance on the chainsaw powerhead and guide bar. Recognize when components should be replaced.
- Demonstrate standard methods used to adjust the tuning of the chainsaw carburetor with a tachometer.
- Identify mechanical conditions that require repair by a shop mechanic.
- Identify mechanical conditions that would create safety hazards to the user and tag equipment as “out of service” in accordance with agency guidelines.

Basic Faller (FAL3)

The Basic Faller (FAL3) is an entry-level chainsaw operator who serves as a member of a firefighting crew or module. The FAL3 engages in low complexity fireline saw operations, including tree felling, bucking, brushing, and limbing, and should be closely supervised during operations. A FAL3 may perform FAL2 tasks under the direct supervisor of a FAL2. The FAL3 reports to an Intermediate (FAL2) or Advanced (FAL1) Faller, a Firefighter Type 1 (FFT1), or one of the Single Resource Bosses (FELB, Crew Boss, Single Resource [CRWB], Engine Boss, Single Resource [ENGB], Firing Boss, Single Resource [FIRB], Helicopter Manager, Single Resource [HMGB]). The FAL3 works in the Operations Section.

Build the Team

1. Implement saw related objectives, priorities, and work assignments as directed.

When to start task: Upon receiving a briefing from the fireline supervisor, implement saw related objectives, priorities, and work assignments as directed.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212

How to accomplish task:

- Receive a tactical briefing from a supervisor. Clarify any directions as needed.
- Scout the work area.
- Utilize appropriate strategies and tactics to accomplish objectives.
- Accept work assignments in accordance with sawyer certifications, capabilities, and assigned equipment.
- Evaluate progress and make operational adjustments as needed.
- Provide status updates.

Manage Risk

1. Learn to recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.

When to start task: Operational complexity is an ongoing assessment process. Sawyers should learn to recognize changes in operational complexity and report pertinent changes to the appropriate supervisor.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Complexity Fade Chart
- *NWCG Incident Response Pocket Guide (IRPG)*, PMS 461, Communication Responsibilities and Risk Management Process
- WFSTAR Module “When Complexity Changes”

How to accomplish task:

- Learn to utilize a risk management assessment to determine the viability of objectives.
- Utilize the NWCG standard sizeup process, complexity tools such as the Complexity Fade Chart in the *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, and experience to determine complexity.
 - Learn to identify trigger points when complexity changes, and alternate mitigation methods are needed.
 - Learn to recognize when complexity exceeds sawyer capabilities or comfort level.
 - Develop an understanding of how human factors impact saw operations.
 - Learn to implement a Go/No-Go decision based on operational complexity. A sawyer may always decide not to engage in saw operations.
 - Ask for additional assistance from another experienced sawyer.
 - Report pertinent changes to a supervisor.

Perform Basic Faller-Specific Duties**1. Develop and safely execute a cut plan to resolve low complexity saw operations using conventional practices.**

When to start task: Prior to engaging in saw operations, perform a sizeup and complexity analysis of the situation and develop an appropriate cut plan.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Procedural Sizeup and Complexity Fade Chart
- WFSTAR Module “When Complexity Changes”

How to accomplish task:

- Utilize the standard sizeup process to identify elements of complexity.
 - This may include species, hazards, topography, seasonality, and geographic considerations affecting the cut plan.
 - Utilize local knowledge and resources when available to gain a better understanding of local factors.
- Perform low complexity brushing, bucking, limbing, and felling operations as directed by the fireline supervisor.
- Utilize the chainsaw to complete low complexity direct and indirect fireline construction duties as directed by the fireline supervisor.

- Utilize the chainsaw to complete low complexity mop-up and securing duties as directed by the fireline supervisor.
- Identify and safely mitigate low complexity hazards inherent with WUI environments during chainsaw operations.
- Turn down and communicate any operation that becomes unsafe or exceeds capabilities or comfort level; consider alternate mitigation methods.

2. Maintain certification and qualification by demonstrating proficiency of Basic Faller knowledge and technical skill to a qualified Intermediate or Advanced Faller evaluator(s) per agency protocol.

When to start task: Prior to sawyer certification lapsing.

Specific resources to complete task:

- Evaluator qualified at least one position level higher
- NWCG Interagency field sawyer certification form

How to accomplish task:

- Seek opportunities to remain proficient at the current qualification level.
- Accurately record saw experience on the IQCS Responder Update Sheet.
- Complete sawyer recertification on a triennial cycle per agency requirements.
- Submit an updated sawyer evaluation to the Unit Training Officer for IQCS entry.

3. Learn to identify tree anatomy and defects contributing to failure.

When to start task: Hazard tree identification is an ongoing learning process. Sawyers must learn to identify tree species and defects related to failure throughout all field operations.

Specific resources to complete task:

- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 8
- Geographic area-specific field guides
- WFSTAR Hazard Tree video
- Hazard Tree and Tree Felling Subcommittee documents

How to accomplish task:

- Learn identification of tree anatomy and defects contributing to failure, such as:
 - Partially rotten or compromised fiber.
 - Recognize the effects of lean on associated tree failures and how lean may affect cut plan implementation.
 - Recognize and identify common tree species.
- Seek out official training and resources to expand knowledge.
- Use local knowledge to identify gaps.
- Consult qualified person to assist in tree identification.

4. Demonstrate a basic knowledge of chainsaw components, maintenance, and repair.

When to start task: Prior to saw operations and continuously throughout the assignment.

Specific resources to complete task:

- Equipment owner's manual
- *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, Chapter 3
- Local or incident equipment repair resources
- More experienced sawyers

How to accomplish task:

- Demonstrate proper fueling procedures.
- Identify and troubleshoot minor mechanical problems.
- Perform routine preventative maintenance on a chainsaw:
 - Routine powerhead maintenance
 - Routine guide bar and chain maintenance, including sharpening

Appendix C: Crosscut Saws

Saws

Generally, crosscut saws are divided into two types: one- and two-person saws. These saws are also categorized as felling saws and bucking saws.

One-Person Crosscut Saws

- One-person crosscut saws have an asymmetrical blade.
- They are equipped with a fixed D-shaped handle.
- Holes are provided at the point (tip) and the butt (near the handle) for attaching a supplemental handle.
- These saws are usually three to four and a half feet long.

One-person crosscut saw.



Two-Person Crosscut Saws

- Two-person crosscut saws are symmetrical.
- The saw cuts in both directions on the pull stroke.
- Two-person crosscut saws manufactured today are of equal width (flat-ground).

Two-person crosscut saw.



Felling Saws

- Felling saws are best suited for felling standing timber in a horizontal position. Felling saws have a concave back and a narrower width than bucking saws, which provide certain advantages.
 - The saws are more flexible.
 - The saws are lighter, so less effort is needed.
 - There is more space to insert a wedge sooner.
- Crosscut saws usually have two handles. Many vintage felling saws have one handle hole in each end.
- Due to their flexibility, felling saws are not well suited for bucking or general utility saws.
- The bucking saw is recommended as the standard saw for most trail and construction applications.

Bucking Saws

- Bucking saws have a straight back and are thicker than felling saws, making them heavier and stiffer.
- Bucking saws are usually operated by one person and cut on both the push and pull strokes.
- The additional stiffness helps prevent the saw from buckling on the push stroke. Bucking saws can also be used for felling, but do not perform as well.

Comparison of felling and bucking saws.



Vintage Saws

- Many people consider vintage saws superior to modern saws in overall performance and craftsmanship.
- These saws may be straight taper, crescent taper, or flat-ground, reflecting variations in thickness.
- Most vintage saws were manufactured with teeth extending to the ends of the blade and removable handles.


Crescent Taper-Ground

- The best vintage saws are crescent taper-ground and provide the greatest kerf clearance of any of the grinds.
- Crescent saws taper in width from teeth to back edge and in length between the middle of the saw to the handles.
- The thinnest portion of the blade is located at the back and midpoint. These saws require the least amount of set with the narrowest kerf.


Definitions

- Saw Grinds — Grinds describe the variations in thickness in a crosscut saw.
- Flat-Ground — The saw's thickness is the same throughout. Saws manufactured today are flat-ground.
- Straight Taper-Ground — The saw is thinner at the back than at the center, providing increased clearance and reduced binding.
 - Straight taper-ground saws require less set because they are less prone to bind.
- Set — Set is defined as the amount that each cutter is bent outward from the center.

Comparison of cuts made by straight taper-ground and flat-ground saws.

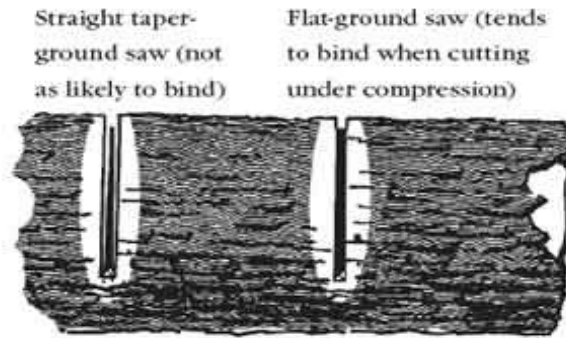

Parts of a crosscut saw.

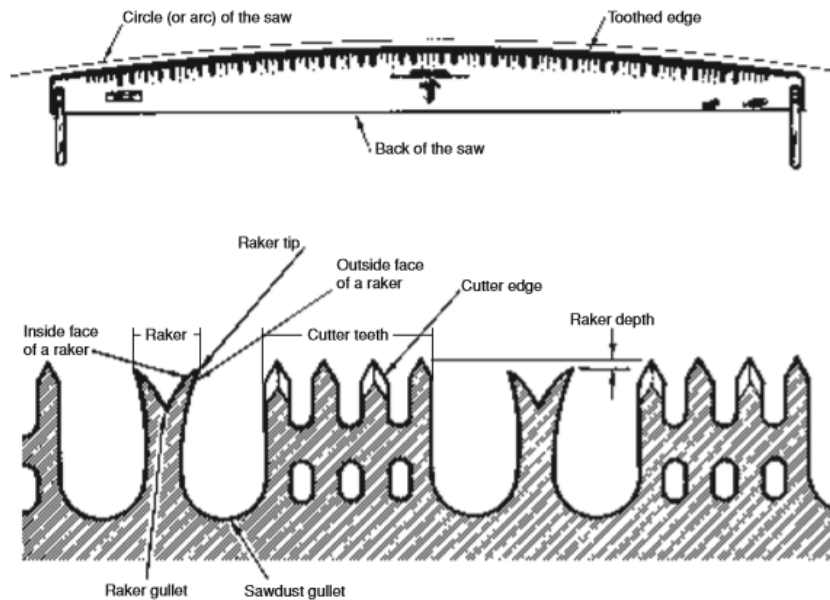

How a Saw Cuts

- A saw functions like a series of knives formed by the teeth. This creates simultaneous parallel cuts and releases the wood between them.

Cutter Teeth

- Crosscut saws consist of two rows of cutting edges.
- As the saw passes through the log, the cutters release wood fibers on each side of the kerf.
- Cutters work best in brittle, seasoned wood.

How a crosscut saw cuts.



Rakers

- The rakers break loose the cut fibers and remove them from the log as the saw is pushed and pulled.
- Unlike a chainsaw, where rakers set the cutting depth, crosscut rakers chisel out the sections that have been cut or scored by the cutters.

Gullets

- Gullets are the spaces between cutters or groups of cutters. Gullets must be large enough to store all the shavings until the saw exits the kerf.
- The longer the saw, the larger the gullets need to be.
- A gullet in the middle of a three-foot log must travel one and a half feet in either direction to clear its shavings.

Saw Handles

- One-person saws have a fixed D-shaped handle, with additional holes on the top of the saw to attach a supplemental handle.
- Many two-person crosscut saws, usually bucking saws, have two handle holes on each end.
- Moving the handle from the lower hole has the same effect as moving the hands several inches up the saw handle.
- With the handle in the upper hole, a push stroke applies more downward force on the saw, causing the teeth to sink deeper into the wood.
- Deeper cuts require more force on the pull stroke.

Maintenance

Saw Maintenance

Cleaning

- Clean and lubricate saws at the end of the day or before storing.
- Resin deposits on the lower part of the teeth and in the gullets create drag unless removed.

- Clean the saw using an environmentally acceptable solvent, then apply a thin coat of petroleum-free lubricant. Some pitch may be removed during cutting with solvent, allowing the saw's motion to scrub away the buildup.
- At the end of the day, pitch buildup can be removed with steel wool and a cleaning solution. Petroleum-free lubricants, such as canola oil, can also help soften resin deposits. While cutting, squeeze bottles allow the sawyer to direct a stream of lubricant onto the saw's surface.
- In damp or wet conditions, swollen wood fibers increase drag and may require additional lubrication.

Removing Rust

- Rust causes more damage to saws than anything else.
- Remove light rust using steel wool and a pumice block or use a wire brush for heavier rust.
 - Never use a power-sanding disk.
- As rust and other deposits are removed, imperfections in the saw blade may become visible. Shiny areas indicate high spots, and dull areas indicate low spots.
- These high and low spots will need to be hammered out by someone with experience in saw filing and maintenance.

Troubleshooting

- Periodically check the saw for straightness, as bent saws may buckle on the push stroke. The narrower, lighter felling saws are more prone to buckling.
- Two combination square rules can be used as straightedges.
- After removing the handles, hang the saw vertically and move the straightedges as a pair along both sides of the blade while feeling for resistance.
- Increased drag on the ends of the straightedge indicates depressions and a high point will be felt on the opposite side.
- Even resistance on both straightedges reflects a straight saw without kinks, bends, or bumps. Mark irregularities for straightening.

Testing the Saw

- Testing determines whether a saw cuts straight and runs smoothly.
- The saw should produce long, thick shavings with smooth edges. Green trees produce longer shavings than dry wood.
- Shavings with whiskers or irregularities indicate rakers that are too long. Paper-thin shavings indicate rakers that are too short.

Examine shavings to identify sharpening problems.



- If the saw consistently pulls to one side through no fault of the sawyer, the saw needs additional maintenance.
- Too much set on one side of the cutters can cause the saw to pull to that side. If a saw has been sharpened improperly, the teeth may be longer on one side than the other.
- The saw will pull to the side with the longer teeth.
- If a saw feels like it is snagging the wood, it is probably because one or more rakers have been filed incorrectly. Inconsistent set in the teeth can also produce a jumpy saw.

A qualified saw filer will need to both sharpen and make any adjustments. Never field-sharpen or touch up dull cutters; doing so shortens the teeth, compounding the problem. The Crosscut Saw Manual (7771-2508-MTDC, revised 2003) by Warren Miller is an excellent resource for more information on saw maintenance and filing, <https://www.fs.usda.gov/t-d/pubs/htmlpubs/htm77712508/toc.htm>.

Brief Overview of Saw Filing Procedures

Specialized tools are needed for filing saws. Filing must be done by a qualified filer in a saw shop.

- Saw Vises and Tools — filing requires a well-lit location with a wooden vise to hold the saw.
- Straightening — straightening is a skilled process involving careful hammering on an anvil.
- Jointing — after cleaning and straightening, jointing ensures all cutter tips lie on the same plane using a tool called a jointer to hold the file. The points are filed off the cutter tips so each of them lies on the circle of the saw.
- Fitting Rakers — raker gullets are shaped using a triangular file, then lowered and checked using a pin gauge, which establishes the exact clearance below the cutters.
- Tooth Pointing — each tooth is sharpened to a point, with the option to make the bevel suit the type of wood the saw is being used to cut.
- Setting Teeth — teeth are uniformly set, so they lie directly behind one another, by hammering the points over a beveled hand anvil and checked using a spider gauge.

Storage

- Because saws are difficult to sharpen, extreme care must be used for storing saws. After transporting, do not store saws in sheaths or guards that may trap moisture next to the saw's teeth. Anything in direct contact can easily damage a saw.

- In field storage, wipe clean the saw and apply lubricant before leaving. Remove the saw handles and sheaths, as animals often gnaw on the wooden handles.
- For long-term storage, apply a coating of heavy oil or grease diluted with solvent. Remove the handles and hang the saw from a nail through a handle hole. Removing the handles will also prevent the oil on the saw from bleeding into the wood.
- Never leave a saw in a bent or leaning position to prevent permanent bends.

Transporting Saws

- Sheaths protect saws from damage or inflicting injury.
- A split length of old firehose makes a good crosscut saw sheath. Wipe the hose's rubber inner lining with an oily rag to reduce the chance of rust.
- Attach the firehose to the saw using a parachute cord or Velcro.
- Saws are difficult to transport because they are long and flexible. Vintage saws may be bent to facilitate transport by hikers or pack stock, but must be straightened transport. Modern saws should not be bent; the softer metal will hold the bend.

Crosscut Bucking

Safety

- The same principles apply to crosscut bucking as to chainsaw bucking, but the sawyer is exposed to risks longer during crosscut saw operations.


Planning

- The saw should be twice as long as the log's diameter plus six inches. For example, a three-foot log requires a saw at least six feet long so that each sawyer has at least one and a half feet of saw blade, clearing the log on each pull to deposit wood shavings from the gullets. Failure to accommodate full clearance will result in increased friction and difficult cutting.

Types of Cuts

- Three basic types of bucking cuts are straight cuts, compound cuts, and offset cuts.
 - A straight cut is made through the log from one side. It can be performed by single or double bucking. It can also be cut from underneath the log by a single sawyer.
 - A compound cut is placed at an angle less than perpendicular to the log and angled so that the bottom of the cut slopes toward the part of the log that is being removed. This cut is typically used when clearing a large log that is across a trail.
 - The offset cut is placed so that the bottom under-stump bucking cut does not align exactly with the top cut. The offset wood prevents a suspended log from damaging the saw when the log drops.

Straight, compound, and offset cuts.

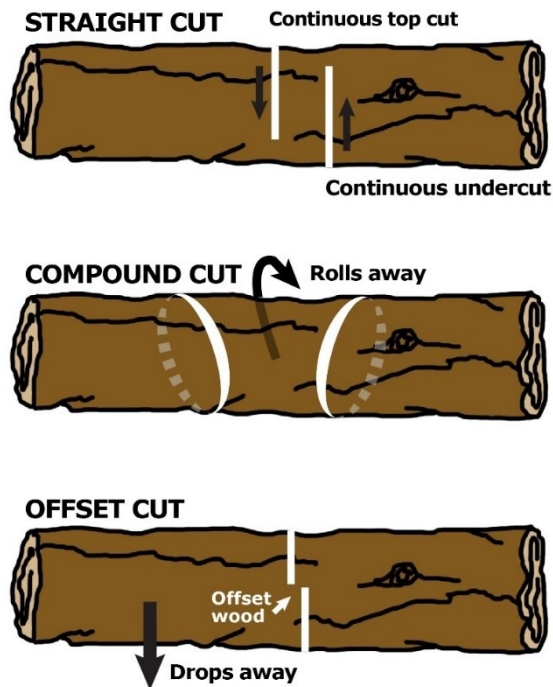

- Single bucking refers to one sawyer operating the saw. Double bucking refers to one sawyer operating each end of the saw. Each method has advantages. New sawyers should master the skill of single bucking before progressing to double bucking to learn how to cut smoothly and avoid buckling.
- The stiffer, heavier bucking saw is easier to push during single bucking, while thinner, lighter felling saws are more difficult for new sawyers.

Single or One-Person Bucking Advantages

- The sawyer begins double bucking but must finish the cut from one side due to safety considerations or log movement.
- The log is too large for the length of the saw.
- The sawing sequence starts or ends with underbucking, which can be performed by a single sawyer.
- A single sawyer can remove the handle from one end of the saw, allowing that end to be drawn into the log so shavings can be removed from the gullets.

Underbucking

Underbucking is the process of crosscutting from the bottom of a log upward. The term underbuck may also describe a mechanical guide used to assist the saw during cutting by creating a fulcrum advantage that applies downward pressure on the saw.

Mechanical underbucks are not available commercially, but an axe with a series of 30- to 45-degree notches can be used as an effective substitute. Drive the axe in parallel to the log and use one of the notches as a guide for the back side of the saw.

- Begin cutting through as much of the compression wood on top without pinching the saw.
- Align the underbuck grooves in the axe handle with the top saw kerf and swing the axe forcefully into the log.
- Place the back of the inverted saw in the underbuck groove.
- Apply light downward pressure on the underbuck and push the saw forward, maintaining consistent pressure on the push and pull strokes. Lubricant will help minimize friction between the axe handle and the saw.

An axe with notched grooves planted in the lower part of the log can work as an underbuck.



A bottom bind occurs when there is insufficient space to place the saw under the log for an undercut, requiring all cutting to be done from the top. In these situations, wedges must be used.

A side bind is one of the most difficult and hazardous bind situations. If insufficient clearance exists beneath the log for the saw tip, cut the compression side wood first.

Alternatively, wood may be sawed and chopped out with an axe. The saw should be held in a nearly vertical position. The finishing cut should be made on the tension wood from a safe position.

Two-Person Cutting

- Always pull, never push! Allow your partner to pull. Pushing may cause the saw to buckle.
- As one sawyer pulls, the other sawyer keeps a relaxed grip on the handle.
- Ensure the saw travels into and out of the kerf in a straight line and the saw remains parallel to the ground.
- Remain alert for dirt and rocks.
- When the cut is finished, remove the handle on the downhill side of the saw and allow the uphill sawyer to pull the saw free.

Crosscut Felling

Felling principles for crosscut saws are the same as those used with chainsaws. Additional communication is needed for two-person cutting, as there is additional exposure with cuts that take longer. Backcuts are similar, but when two sawyers are working together, it is important to identify who will take the saw to the escape path. There are different methods to construct the undercut.

Three Undercut Options:

Chop out the undercut with an axe.

- This method is as fast as sawing for smaller trees.
- It is effective in restricted areas where one side of the tree does not offer standing room for the sawyer or saw clearance.
- Because applying lubricant to the bottom edge of a horizontal saw can be difficult, chopping out the undercut may be easier when working with extremely pitchy trees.

Horizontal cut with a saw and sloping cut with an axe.

- This option simplifies the creation of a horizontal bottom cut.
- It also helps reduce the likelihood of bypass cuts.

Both cuts with a saw.

- On large trees, using a crosscut saw for the sloping cut may be easier than using an axe. Both the sloping cut and the backcut are performed in the same as with a chainsaw.

The *NWCG Standards for Wildland Fire Chainsaw Operations*, PMS 212, is developed and maintained by the Hazard Tree and Tree Felling Subcommittee (HTTFS), under the direction of the Risk Management Committee (RMC), an entity of the National Wildfire Coordinating Group (NWCG).

Previous editions: March 2025, 2022, 2021.

While they may still contain current or useful information, previous editions are obsolete. The user of this information is responsible for confirming that they have the most up-to-date version. NWCG is the sole source for the publication.

This publication is available electronically at <https://www.nwcg.gov/publications/pms212>.

Submit comments, questions, and recommendations to the appropriate agency program manager assigned to the HTTFS. View the complete roster at <https://www.nwcg.gov/committee/hazard-tree-and-tree-felling-subcommittee/roster>.

Publications and training materials produced by NWCG are in the public domain. Use of public domain information, including copying, is permitted. Use of NWCG information within another document is permitted if NWCG information is accurately credited to NWCG. The NWCG logo may not be used except on NWCG-authorized information. “National Wildfire Coordinating Group,” “NWCG,” and the NWCG logo are trademarks of NWCG.

The use of trade, firm, or corporation names or trademarks in NWCG products is solely for the information and convenience of the reader and does not constitute endorsement by NWCG or its member agencies of any product or service to the exclusion of others that may be suitable.

This NWCG publication may contain links to information created and maintained by other non-federal public and/or private organizations. These organizations may have different policies from those of NWCG. Please note that NWCG does not control and cannot guarantee the relevance, timeliness, or accuracy of these outside materials.